

FED. SUP CLASS
4730

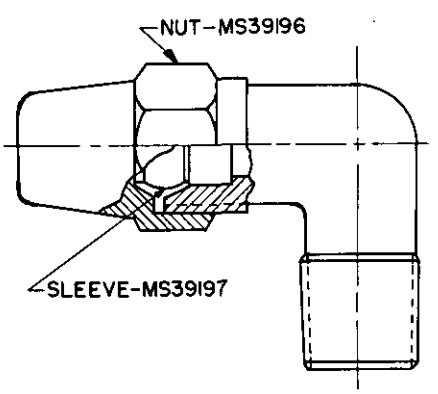

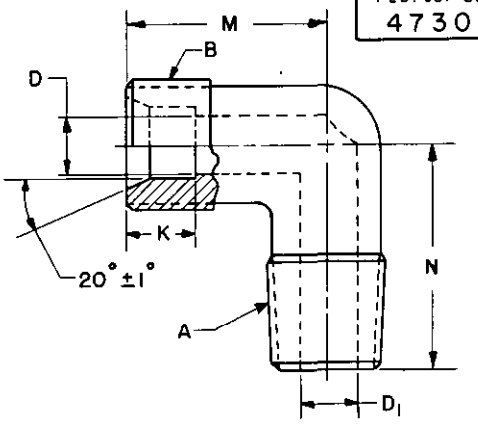

REVIEWER: CG, CS, ME, MI
USER: AT, AV, ER GL, MC

DASH NO. See Note 10 ASSY	DASH NO. See Note 10 BODY	TUBE O.D.	A PIPE THREAD NPTF	B STRAIGHT THREAD	D DIA DRILL	D_1 DIA DRILL	K	M ±.03	N ±.03
** 1	*21	1/4	1/8	7/16-24UNS-2A	0.188	0.188	0.25	0.63	0.67
2	22	3/8	1/8	17/32-24UNS-2A	0.312	0.188	0.31	0.73	0.75
* 3	*23	3/8	1/4	17/32-24UNS-2A	0.312	0.312	0.31	0.80	0.93
** 4	**24	1/2	1/4	11/16-20UN-2A	0.406	0.312	0.44	0.87	1.00
5	25	3/8	3/8	17/32-24UNS-2A	0.312	0.406	0.31	0.85	0.92
* 6	*26	1/2	3/8	11/16-20UN-2A	0.406	0.406	0.44	0.94	1.00
** 7	**27	5/8	3/8	13/16-18UNS-2A	0.531	0.406	0.44	1.01	1.06
8	28	3/8	1/2	17/32-24UNS-2A	0.312	0.531	0.31	.95	1.11
* 9	*29	5/8	1/2	13/16-18UNS-2A	0.531	0.531	0.44	1.10	1.25
**10	**30	3/4	3/4	1-18UNS-2A	0.656	0.750	0.56	1.28	1.34
**15	**35	1/2	3/8	11/16-20UN-2A	0.406	0.406	0.44	0.94	1.38
**16	**36	1/2	3/8	11/16-20UN-2A	0.406	0.406	0.44	0.94	2.00
**17	**37	3/8	1/8	17/32-24UNS-2A	0.312	0.188	0.31	0.73	1.88

* Standard sizes.
** These items are inactive for new design after 30 December 1971.

NOTES:
1. MATERIAL: Brass, in accordance with procurement specification.
2. PROTECTIVE COATING: None.
3. DIMENSIONS AND TOLERANCES: Dimensions and tolerances not shown shall be in accordance with the SAE Standard for Spherical Sleeve (Compression) Tube Fittings (SAE J246).
4. THREADS: Threads shall be in accordance with Screw-Thread Standards for Federal Services, Handbook H28.
5. PART NUMBER: The MS part number consists of the MS number, plus the dash number.
   A. For complete item (with nut and sleeve), use the MS number, plus the assembly dash number. Example: MS39182-1.
   B. For the body only, use the MS number, plus the body dash number. Example: MS39182-21.
6. Reference documents shall be of the issue in effect on date of invitations for bid.
7. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
8. The illustration is for identification and is not intended to restrict designs or shapes not dimensioned.
9. Interchangeability: After 12 November 1968, MS39182-35, MS39182-36 and MS39182-37 superseded MS39183-1, MS39183-2 and MS39183-3 respectively. MS39182-35, MS39182-36 and MS39182-37 are inactive after 30 December 1971.
10. Previously inactive bodies, dash numbers 21, 22, 23, 25, 26, 28 and 29, are now active for design only; normally for replenishment the complete assembly should be requisitioned.

Ⓕ CANCELLED-For Procurement Use SAE J246

APPROVED 3 APR 62 REVISED Ⓐ 22 OCT 64 Ⓑ 27 FEB 67 Ⓒ 12 NOV 68 Ⓓ 30 DEC 71 Ⓔ 10 DEC 76 Ⓕ 24 OCT 86

P.A. AR Other Cust	TITLE: ELBOW, PIPE TO TUBE, 90 DEGREE, MALE PIPE END, FOR AIR LINES-SPHERICAL SLEEVE	MILITARY STANDARD MS39182
PROCUREMENT SPECIFICATION MIL-F-45911	SUPERSEDES: CFCX1 and CFCX1.1 and MS39183	SHEET 1 OF 1

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 4730-0833

AMSC/NA

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1986 — 704-036/45888
Source: https://assist.dla.mil -- Downloaded: 2026/10/28T14:17Z
Check the source to verify that this is the current version before use.