

USER ACTIVITIES:
REVIEWER ACTIVITIES:
This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.


FED. SUP CLASS
2330

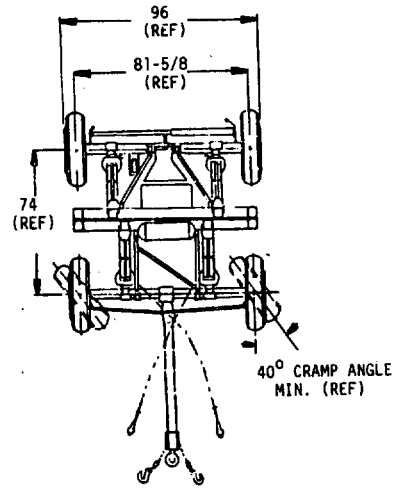

PLAN VIEW



SIDE VIEW (LOWERED)

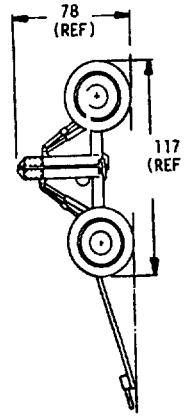

SIDE VIEW

VEHICLE CHARACTERISTICS

PRIME MOVER: 5 TON, 6x6 — M809

DOLLY TRAILER: FRONT — M841; REAR — M842

CURB WEIGHT: 3,173 LBS.

WEIGHT DISTRIBUTION: FRONT AXLE 6,332 LBS.; REAR AXLE 5,960 LBS.

GROSS WEIGHT: (DOLLY SET WITH PAYLOAD) LOADED 12,292 LBS.

BODY DATA:

OVERALL LENGTH		177 IN.
REDUCIBLE TO:	TOWBAR UP	117 IN.
	TOWBAR OFF	108 IN.
OVERALL WIDTH		96 IN.
OVERALL HEIGHT		81 IN.
REDUCIBLE TO:	TOWBAR DOWN	78 IN.
	HYDRAULIC CYLINDERS IN LOWERED POSITION	64 IN.
MINIMUM GROUND CLEARANCE		15-1/4 IN.
DEPARTURE ANGLE		90 DEGREES

FORDING DEPTH: UP TO SUBMERGED TIRES 41 IN.

ELECTRICAL SYSTEM: 24 V DC

COMPOSITE LIGHTS 11614157

REFLECTORS: FRONT MS35387-2; REAR MS35387-1

SPRINGS: AIR, MODEL 1248

DIAMETER 10 IN.

HEIGHT (RIDING) 4.5 IN.

PAYLOAD (LB)	LOAD OFF (PSI)	LOAD ON (PSI)
0	19	19
4000	45	65
5000	55	80
6200	65	85
9000	80	130
9500	150	125

AXLES: SINGLE, TUBULAR
FRONT AXLE ASSEMBLY 12255284
REAR AXLE ASSEMBLY 11647950

SHOCK ABSORBERS: HYDRAULIC 10947382

WHEELS: SINGLE, VENTILATED DISK (FOR 20 IN. RIM) 7389620
RIM 20 x 7.5 MILITARY TYPE 7389061

TIRES: 9.00 x 20, CLASS A, 8-PLY MILITARY NON-DIRECTIONAL CROSS-COUNTRY MIL-T-12459

TUBES: 9.00 x 20, GROUP 2 ZZ-I-550
RECOMMENDED PRESSURE WITH MAXIMUM LOAD:
HIGHWAY SERVICE 50 PSI
OFF-ROAD SERVICE AND AIR TRANSPORT 25 PSI

BRAKES:
SERVICE:
DRUM SIZE 15 IN.
AIR/HYDRAULIC ACTUATION
EMERGENCY RELAY VALVE MS53004-1
AIR RESERVOIR 10947428
SAE J10, 125 PSI
APPROX. CAPACITY 1,080 CU. IN.
PARKING:
DRUM SIZE 15 IN.
MECHANICALLY-ACTIVATED HAND BRAKE MOUNTED ON CURB AND OUTBOARD SIDE OF DOLLY TRAILER REAR
EFFECTIVE FOR 15 PERCENT SLOPE

MAXIMUM TOWING SPEED:
CROSS COUNTRY 25 MPH
HIGHWAY 50 MPH

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.

(A) ENTIRE STANDARD REVISED

MS PART NO.	ENGINEERING DWG NO
MS52148-1	8736772

APPROVED 19 FEB 81 REVISED (A) 15 JAN 85

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE DOLLY SET, LIFT, TRANSPORTABLE SHELTER: 4-1/2 TON, M840	MILITARY STANDARD MS52148(AT)
PROCUREMENT SPECIFICATION MIL-D-62027(AT)	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.