INCH-POUND

MS9123A
AMENDMENT 1
8 July 2003


MILITARY STANDARD

SCREW, MACHINE, SLOTTED HEX HEAD, .250-28

This amendment forms a part of MS9123A, dated 28 February 1984, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

In drawing: Replace front view with this drawing and add view A:

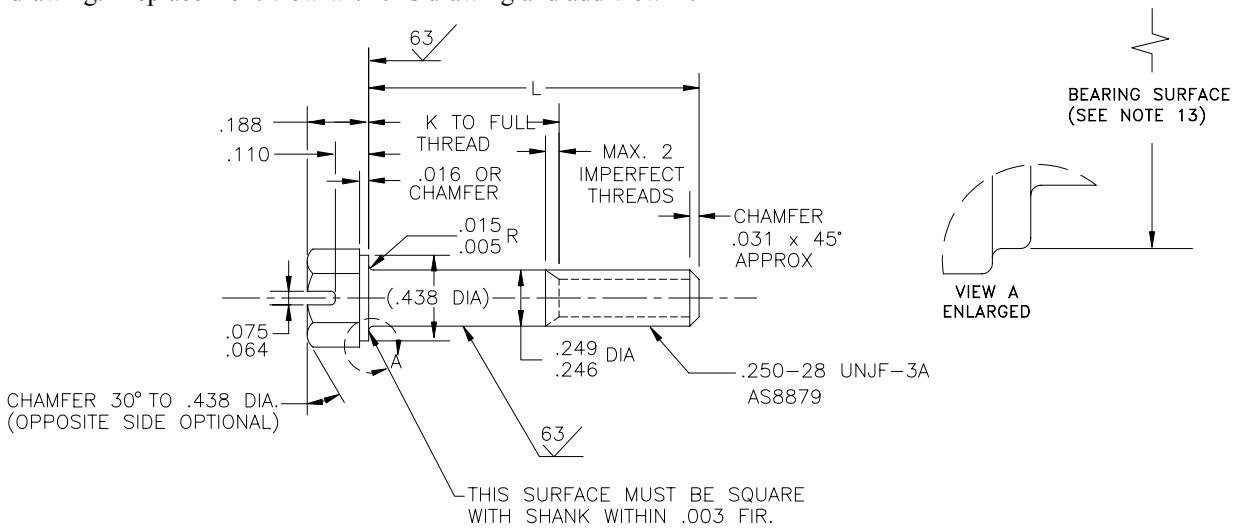

Add the word "NOTES:" above note 1.

Note 7: Delete "ANSI B46.1-1962" and substitute "ASME B46.1".

Note 8: Delete "AMS 7452" and substitute "AS7452".

Add new note: "13. BEARING SURFACE: BEARING SURFACE SHALL BE FLAT AND WASHER FACED. DIAMETER OF BEARING SURFACE SHALL BE EQUAL TO THE MAXIMUM WIDTH ACROSS FLATS WITHIN A TOLERANCE OF MINUS 10% IN ACCORDANCE WITH ASME B18.2.1"

Custodians:
Army -MI
Navy-AS

Preparing Activity:
DLA-IS

(Project 5305-2544)

AMSC N/A FSC 5305

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:10Z
Check the source to verify that this is the current version before use.