

FED SUP CLASS
5305



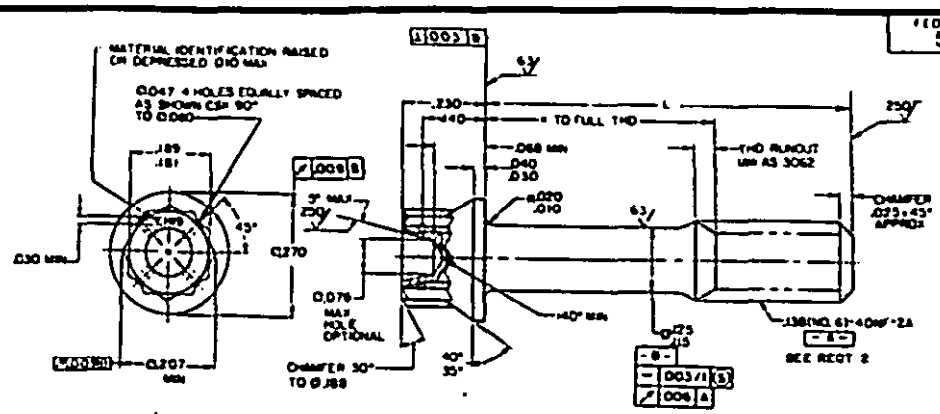

SECTION THRU THREAD PROFILE



OPTIONAL SHAPE OF HEAD

TABLE I DASH NUMBERS AND DIMENSIONS

DASH NO.	L	K +.000 -.060	APPROX WEIGHT LB/100
-02	.250	1/	.30
-03	.312	1/	.32
-04	.375	1/	.34
-05	.438	1/	.37
-06	.500	1/	.39
-07	.562	1/	.41
-08	.625	1/	.44
-09	.688	.125	.46
-10	.750	.188	.48
-11	.812	.250	.50
-12	.875	.312	.52
-13	.938	.375	.55
-14	1.000	.438	.57
-15	1.062	.500	.59
-16	1.125	.562	.61
-17	1.188	.625	.64
-18	1.250	.688	.66
-19	1.312	.750	.68
-20	1.375	.812	.70
-21	1.438	.875	.73
-22	1.500	.938	.75

1/ THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

REQUIREMENTS:

1. MATERIAL: CORROSION AND HEAT RESISTANT STEEL AMS 5732 (UNS S66286).
2. THREADS: THREADS IN ACCORDANCE WITH MIL-S-7742. INCOMPLETE THREADS NOT TO ENTER FILLET.
3. DIMENSIONING AND TOLERANCING: DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14.5M.
4. WRENCHING CONFIGURATION: WRENCHING CONFIGURATION IN ACCORDANCE WITH AS 870.
5. SURFACE TEXTURE: SURFACE TEXTURE, UNLESS OTHERWISE SPECIFIED SHALL BE 125 MICROINCHES EXCEPT UPSET HEAD.
6. FLUORESCENT PENETRANT INSPECTION: FLUORESCENT PENETRANT INSPECTION SHALL BE IN ACCORDANCE WITH AMS 2645.
7. TOLERANCE: UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE FOR LINEAR DIMENSIONS ±.010 , ANGULAR DIMENSIONS ±5° .
8. EDGES: BREAK SHARP EDGES .003 - .015 UNLESS OTHERWISE SPECIFIED.

INACTIVE FOR NEW DESIGN AFTER 6 APR 67

© ENTIRE STANDARD REVISED

APPROVED 15 AUG 60 REVISED © 13 JUL 87

P.A. NAVY-AS / Other Cust AIR FORCE-11	INTERNATIONAL INTEREST	TITLE SCREW, MACHINE-CRES, DOUBLE HEXAGON EXTENDED WASHER HEAD, DRILLED, .138-40	MILITARY STANDARD MS9187
PROCUREMENT SPECIFICATION AMS 7478	SUPERSEDES:		PAGE 1 OF 2

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5305-1710

USER ACTIVITIES:

REVIEWER ACTIVITIES: DLA-IS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Preparation for all new engineering and design applications and for repetitive use shall be made from this document when applicable.


AMSC N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:12Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5305

9. PART NUMBER: THE PART SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I.

EXAMPLE: MS9187-02



MS9187-02 INDICATES: SCREW, MACHINE-CRES. AMS 5735 DOUBLE HEXAGON EXTENDED WASHER DRILLED, .138-40, .250 LONG.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. DO NOT USE UNASSIGNED PART NUMBERS.
3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
4. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
5. THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION.
6. AS AND AMS ARE SAE PUBLICATIONS.

USER ACTIVITIES:

REVIEWER ACTIVITIES:
DLA-IS

APPROVED 15 AUG 60 REVISED © FOR CHANGES SEE PAGES 1 AND 2

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. NAVY-AS	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust AIR FORCE-11		SCREW, MACHINE-CRES, DOUBLE HEXAGON EXTENDED WASHER HEAD, DRILLED, .138-40	MS9187
PROCUREMENT SPECIFICATION AMS 7478	SUPERSEDES:		PAGE 2 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5305-1710

☆ U.S. GOVERNMENT PRINTING OFFICE:1988 505-033/90227

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:12Z
Check the source to verify that this is the current version before use.