
MS9206 (ASG)

FED. SUP CLASS
5305

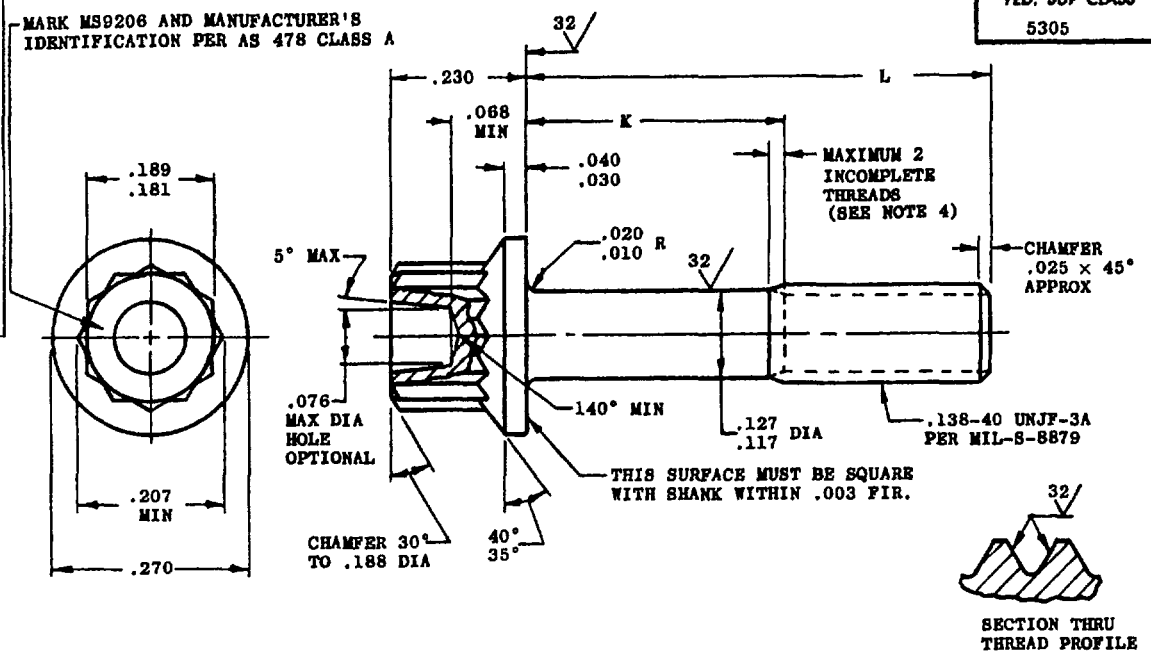

PART NO.	L	K	APPROX WEIGHT LB/100
MS9206-02	.250	.058-.078	.297
MS9206-03	.312	.058-.078	.318
MS9206-04	.375	.058-.078	.340
MS9206-05	.438	.058-.078	.363
MS9206-06	.500	.058-.078	.386
MS9206-07	.562	.058-.078	.406
MS9206-08	.625	.058-.078	.429
MS9206-09	.688	.102-.162	.451
MS9206-10	.750	.164-.224	.473
MS9206-11	.812	.226-.286	.495
MS9206-12	.875	.289-.349	.517

PART NO.	L	K	APPROX WEIGHT LB/100
MS9206-13	.938	.352-.412	.539
MS9206-14	1.000	.414-.474	.561
MS9206-15	1.062	.476-.536	.583
MS9206-16	1.125	.539-.599	.605
MS9206-17	1.188	.602-.662	.627
MS9206-18	1.250	.664-.724	.649
MS9206-19	1.312	.726-.786	.671
MS9206-20	1.375	.789-.849	.693
MS9206-21	1.438	.852-.912	.715
MS9206-22	1.500	.914-.974	.737

1. SHANK SHALL BE STRAIGHT WITHIN .003 FIR. PER INCH OF SCREW LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .009 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: STEEL AMS 6304.
6. HARDNESS: ROCKWELL C42-46.
7. FINISH: DIFFUSED NICKEL-CADMIUM PLATE AMS 2416. DIMENSIONS SPECIFIED ARE AFTER PLATING. CONTACT POINTS PERMISSIBLE. PD MAY BE REDUCED .0012 MAXIMUM BEFORE PLATING.
8. MANUFACTURING SPECIFICATION: AMS 7459. PARTS SUBJECT TO MAGNETIC PARTICLE INSPECTION PER AMS 2640 BEFORE PLATING.
9. SURFACE ROUGHNESS: AS 291 UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
10. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
11. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°.
12. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

Reviewers and Users: USAF - ASD, Navy - Wepa

This standard has been approved by the ASD (Department of the Air Force) and the Navy and is mandatory for use by that activity. All other military activities are requested to employ this standard where suitable

APPROVED 10 Dec 63 REVISED

P.A.	TITLE	MILITARY STANDARD
USAF - ASD Other Cust Navy - Wepa	SCREW, MACHINE - STEEL AMS 6304, DIFFUSED NICKEL-CADMIUM PLATED, DOUBLE HEXAGON EXTENDED WASHER HEAD, .138-40 UNJF-3A	MS9206 (ASG)
PROCUREMENT SPECIFICATION: NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 61 672-1 (Limited coordination)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:12Z
Check the source to verify that this is the current version before use.