
MIL-D-3943 / 87A
31 March 1987
SUPERSEDING
MIL-D-3943 / 87
4 June 1976


MILITARY SPECIFICATION SHEET

DECORATION, DEFENSE SUPERIOR SERVICE MEDAL

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-D-3943.

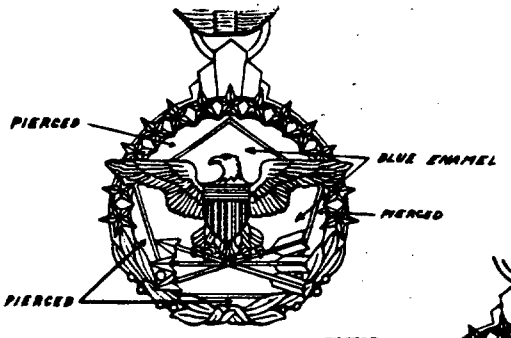


OBVERSE

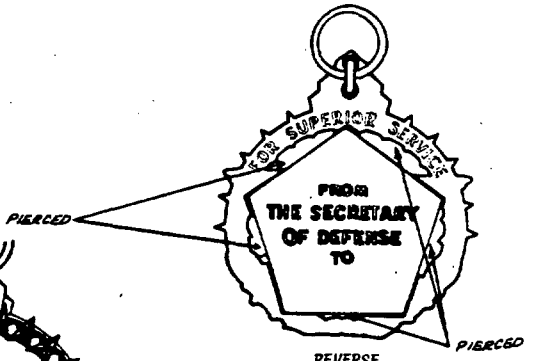


REVERSE

DASH NO.

-1: REGULAR SIZE
-2: MINIATURE SIZE

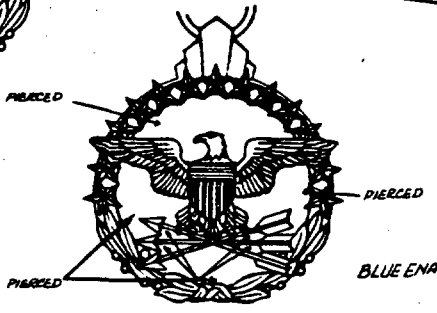

SHELL

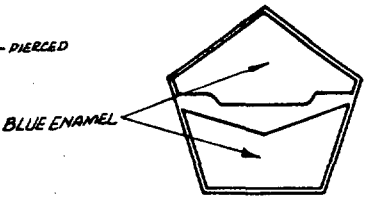

PENTAGONAL INSERT

MATERIAL:
SHELL (EAGLE AND WREATH): RED BRASS
PENTAGONAL INSERT: GILDING METAL

DIMENSIONS (INCHES):

SHELL:		INSERT:	
HEIGHT (OVERALL):		HEIGHT (OVERALL):	
-1:	1-7/8 (REF)	-1:	1-3/16 (REF)
-2:	15/16 (REF)	-2:	19/32 (REF)
WIDTH (OVERALL):		WIDTH (OVERALL):	
-1:	1-5/8 (REF)	-1:	1-1/4 (REF)
-2:	13/16 (REF)	-2:	5/8 (REF)
THICKNESS (SHIELD):		THICKNESS (THICKEST POINT):	
-1:	.135 ± .010	-1:	.080 ± .010
-2:	.090 ± .010	-2:	.060 ± .010

ASSEMBLED THICKNESS (AT EAGLES SHIELD):
-1: .215 ± .010
-2: .150 ± .010

FINISH:
SHELL: NICKEL PLATED, SILVER PLATED, OXIDIZED, RELIEVED, MATTE FINISH
INSERT: ENAMELED, NICKEL PLATED, SILVER PLATED, OXIDIZED, RELIEVED, MATTE FINISH

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:26Z
Check the source to verify that this is the current version before use.

NOTES:

1. THE INSERT SHALL BE SOFT SOLDERED TO THE SHELL IN THE POSITION SHOWN.

2. THE LUG SHALL BE LOCATED ON THE VERTICAL CENTER LINE OF THE SHELL AND SHALL BE FORMED FROM RED BRASS WIRE .065 ± .003 INCH DIAMETER FOR DASH NO. 1 AND .040 INCH DIAMETER FOR DASH NO. 2. THE LUG SHALL BE A HALF CIRCLE SOLDERED IN THE LOCATION SHOWN AND 7/32 ± 1/32 INCH IN DIAMETER FOR DASH NO. 1 AND 5/32 ± 1/32 INCH IN DIAMETER FOR DASH NO. 2.

3. THE ENAMEL AREAS SHALL MATCH THE ENAMEL OF THE STANDARD OR APPROVED SAMPLE AND SHALL CONFORM TO TIOH COLOR CHIP NO. 33.

4. TYPE I DECORATION SET SHALL CONSIST OF A REGULAR SIZE MEDAL, A SERVICE RIBBON AND A LAPEL BUTTON ALL PACKAGED IN A PRESENTATION CASE CONFORMING TO MIL-C-14633, STYLE 8, TYPE XIV WITH A CLASS 1 OR 1A PAD.

5. THE RIBBON FOR THE NECK RIBBON, SHIELD/PENDANT DRAPE AND SERVICE RIBBON SHALL CONFORM TO MIL-R-11589/220.

6. THE LAPEL BUTTON SHALL CONFORM TO MIL-L-11484/115.

Custodian:
Army - IH

Review activity:
Other - CT

Preparing activity:
Army - IH

(Project No. 8455 - 0251)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:26Z
Check the source to verify that this is the current version before use.