NOT MEASUREMENT SENSITIVE


MIL-DTL-3943/87J(IH)
11 April 2022
SUPERSEDING
MIL-DTL-3943/87H(IH)
15 June 2017

DETAIL SPECIFICATION SHEET

DECORATION, DEFENSE SUPERIOR SERVICE MEDAL

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

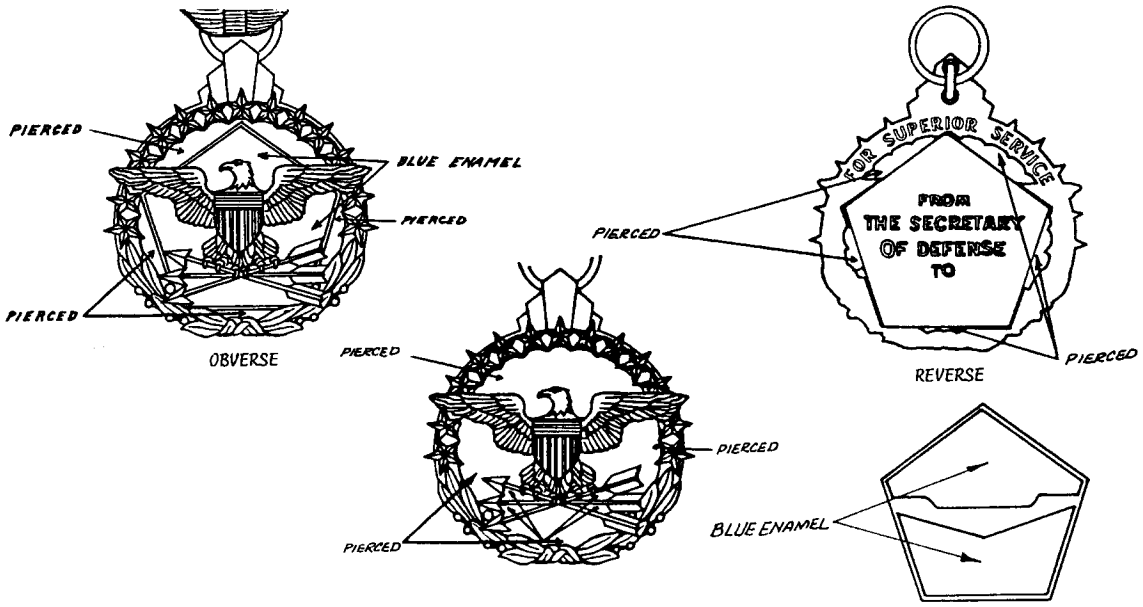

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL:
SHELL (Eagle and wreath): Red Brass 85/15 (UNS Alloy No. C-230)
PENTAGON INSERT: Gilding Metal 95/5 (UNS Alloy No. C-210)

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:25Z
Check the source to verify that this is the current version before use.

FINISH:
OBVERSE:
SHELL: Silver Plated, Oxidized, Buffed Relieved, Matte Finish and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 14.
INSERT: Epoxy resin, Silver Plated, Buffed Finish, Matte Finish and shall match TIOH Metal Finish Chip Number 14.
REVERSE: Silver Plated, Buffed Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14.

DIMENSIONS:
SHELL:
HEIGHT (Overall):
-1: 1-7/8 inches (REF)
-2: 15/16 inch (REF)
WIDTH (Overall):
-1: 1-5/8 inches (REF)
-2: 13/16 inch (REF)
THICKNESS (At eagle's shield):
-1: 0.135 inch ± 0.005 inch
-2: 0.090 inch ± 0.005 inch
INSERT:
HEIGHT (Overall):
-1: 1-3/16 inches (REF)
-2: 19/32 inch (REF)
WIDTH (Overall):
-1: 1-1/4 inches (REF)
-2: 5/8 inch (REF)
THICKNESS (At thickest point):
-1: 0.080 inch ± 0.005 inch
-2: 0.060 inch ± 0.005 inch
ASSEMBLED THICKNESS (At eagle's shield):
-1: 0.215 inch ± 0.010 inch
-2: 0.150 inch ± 0.010 inch

DECORATION SET: Decoration set shall consist of a regular size medal, a service ribbon, and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type X, Style 8 with a Class 1 or 1A pad.

EPOXY: Epoxy resin (Stoning epoxy) shall be applied to the Decoration as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below.

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Blue	#33

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:25Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Pierced areas shall be as indicated.

3. The insert shall be soft soldered to the shell in the position shown.

4. The lug shall be located on the vertical center line of the shell and shall be fabricated from 0.065 inch ± 0.003 inch nominal diameter wire for -1 and 0.040 inch ± 0.003 inch nominal diameter wire for -2 with the same material and finish as the shell. The lug shall be a half circle hard soldered in the location shown with an outside diameter of 7/32 inch ± 1/64 inch for -1 and 5/32 inch ± 1/64 inch for -2

5. The specification slash sheet for the ribbon for the pendant drape and for the service ribbon is MIL-DTL-11589/220.

6. The specification slash sheet for the lapel button is MIL-DTL-11484/115.

7. For commercial sale only may be manufactured using Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2022-096)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:25Z
Check the source to verify that this is the current version before use.