NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/89D
11 May 1999
SUPERSEDING
MIL-DTL-3943/89C
1 May 1997

DETAIL SPECIFICATION SHEET

DECORATION, NATIONAL INTELLIGENCE DISTINGUISHED SERVICE MEDAL

Inactive for new design after 14 January 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

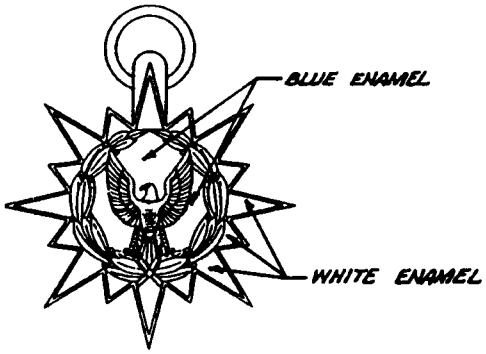

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL:

BASE: Gilding Metal
DEVICE: Red Brass

FINISH:

BASE: Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
DEVICE: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:27Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

BASE:
HEIGHT (including lug):
-1: 1-9/16 inches (REF)
-2: 25/32 inch (REF)
WIDTH (overall):
-1: 1-1/2 inches (REF)
-2: 3/4 inch (REF)
THICKNESS (at thickest point):
-1: 0.100 inch ± 0.005 inch
-2: 0.070 inch ± 0.005 inch

DEVICE:
DIAMETER:
-1: 13/16 inch (REF)
-2: 13/32 inch (REF)
THICKNESS (at thickest point):
-1: 0.100 inch ± 0.005 inch
-2: 0.080 inch ± 0.005 inch

ASSEMBLED THICKNESS (at eagle's shield):
-1: 0.200 inch ± 0.010 inch
-2: 0.150 inch ± 0.010 inch

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enamel colors shall be as indicated. The colors shall conform to the TIOH Hard Enamel Color Chip Numbers listed below.

COLOR	CHIP NO.
Blue	18
White	28

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. When epoxy resin is used in lieu of hard enamel, the material requirement shall be gilding metal or red brass.

4. The device shall be soft soldered to the base in the position shown.

5. Decoration set shall consist of a regular size medal, a service ribbon, and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type XII, Style 3 with a Class 1 or 1A pad.

6. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/224.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:27Z
Check the source to verify that this is the current version before use.

7. The lapel button shall conform to MIL-DTL-11484/118.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Air Force - 45
Navy - NU

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
Navy - MC
Coast Guard - CG
DLA - CT

(Project No. 8455-0978)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:27Z
Check the source to verify that this is the current version before use.