NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/90C
1 May 1997
SUPERSEDING
MIL-D-3943/90B
24 June 1994

DETAIL SPECIFICATION SHEET

DECORATION, NATIONAL INTELLIGENCE MEDAL OF ACHIEVEMENT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

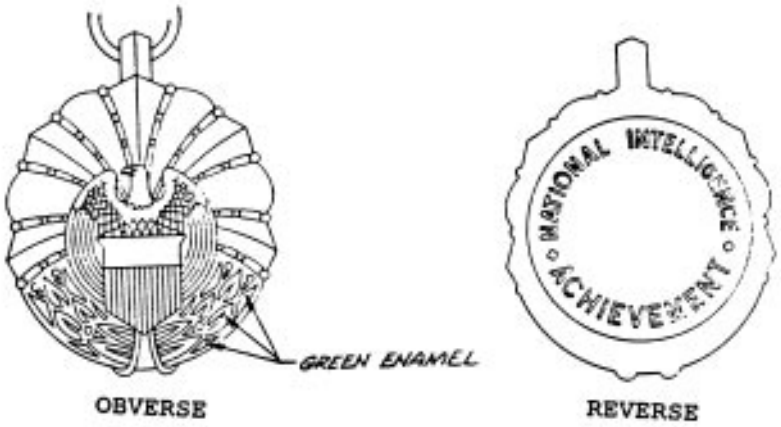

OBVERSE REVERSE

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Red Brass

FINISH:
BASE: Hard Enameled, Gold Plated, Rose Gold Plated, Relieved, Polished Highlights.
DEVICE: Gold Plated, Rose Gold Plated, Relieved, Matte Finish.

DIMENSIONS:
BASE:
HEIGHT (Including Lug):
-1: 1-3/4 inches (4.45 cm) (REF)
-2: 7/8 inch (2.22 cm) (REF)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T00:40Z
Check the source to verify that this is the current version before use.

WIDTH:
-1: 1-3/8 inches (3.49 cm) (REF)
-2: 11/16 inch (1.75 cm) (REF)
THICKNESS (At Thickest Point):
-1: 0.110 inch ± 0.005 inch (0.279 cm ± 0.012 cm)
-2: 0.095 inch ± 0.005 inch (0.241 cm ± 0.012 cm)
DEVICE:
HEIGHT (Overall):
-1: 7/8 inch (2.22 cm) (REF)
-2: 7/16 inch (1.11 cm) (REF)
WIDTH:
-1: 3/4 inch (1.91 cm) (REF)
-2: 3/8 inch (0.95 cm) (REF)
THICKNESS (At Thickest Point):
-1: 0.055 inch ± 0.005 inch (0.140 cm ± 0.012 cm)
-2: 0.055 inch ± 0.005 inch (0.140 cm ± 0.012 cm)
ASSEMBLED THICKNESS:
-1: 0.165 inch ± 0.010 inch (0.419 cm ± 0.025 cm)
-2: 0.150 inch ± 0.010 inch (0.381 cm ± 0.025 cm)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled color shall be green as indicated. The enamel color shall conform to TIOH chip number 12 or the standard sample.

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

4. Device shall be soft soldered to the base.

5. Decoration set shall consist of a regular size medal, a service ribbon and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type XIII, Style 2 with a Class 1 or 1A pad.

6. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/226.

7. The lapel button shall conform to MIL-DTL-11484/117.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Air Force - 45
Navy - NU
Review activities:
Air Force - 32, 82, 99
Navy - MC
Coast Guard - CG
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0887)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T00:40Z
Check the source to verify that this is the current version before use.