INCH-POUND

MIL-DTL-3943/90D
1 December 2007
SUPERSEDING
MIL-DTL-3943/90C
1 May 1997

DETAIL SPECIFICATION SHEET

DECORATION, NATIONAL INTELLIGENCE MEDAL OF ACHIEVEMENT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

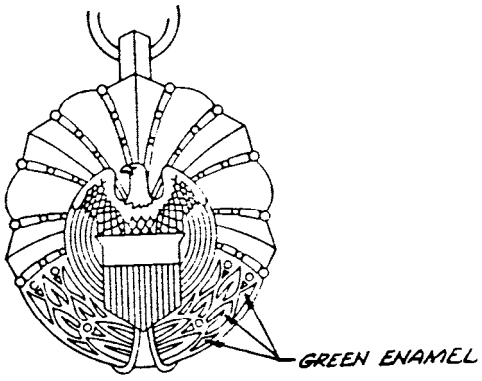

OBVERSE

REVERSE

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Red Brass

FINISH:
BASE: Hard Enameled, Gold Plated, Buffed Relieved, Polished Highlights.
DEVICE: Gold Plated, Buffed Relieved, Matte Finish.

DIMENSIONS:

BASE:
HEIGHT (including lug):
-1: 1-3/4 inches (REF)
-2: 7/8 inch (REF)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T00:40Z
Check the source to verify that this is the current version before use.

WIDTH:
-1: 1-3/8 inches (REF)
-2: 11/16 inch (REF)
THICKNESS (at thickest point):
-1: 0.110 inch ± 0.005 inch
-2: 0.095 inch ± 0.005 inch

DEVICE:
HEIGHT (overall):
-1: 7/8 inch (REF)
-2: 7/16 inch (REF)
WIDTH:
-1: 3/4 inch (REF)
-2: 3/8 inch (REF)
THICKNESS (at thickest point):
-1: 0.055 inch ± 0.005 inch
-2: 0.055 inch ± 0.005 inch

ASSEMBLED THICKNESS:
-1: 0.165 inch ± 0.010 inch
-2: 0.150 inch ± 0.010 inch

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. When hard enamel is used, the material requirement shall be gilding metal. When epoxy is used, the material requirement shall be either red brass or gilding material. Enameled color shall be green as indicated. The enamel color shall conform to TIOH Chip Number 12.

3. Device shall be soft soldered to the base.

4. Decoration set shall consist of a regular size medal, a service ribbon and a lapel button all packaged in a presentation case conforming to MIL-C-14633, Type XIII, Style 2 with a Class 1 or 1A pad.

5. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/226.

6. The lapel button shall conform to MIL-DTL-11484/117.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T00:40Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Air Force - 11
Navy - NU

Preparing activity:
Army - IH
(Project No. 8455-2008-048)

Review activities:
Air Force - 99
Navy - MC
Coast Guard - CG
DLA - CT

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T00:40Z
Check the source to verify that this is the current version before use.