MIL-B-5423/8A
29 May 1968
SUPERSEDING
MIL-B-5423/8
5 August 1960

MILITARY SPECIFICATION SHEET

BOOT, DUST, AND WATER SEAL, TYPE B (FOR PUSH-BUTTON SWITCHES), STYLE 3 (ONE-HOLE MOUNTING, THROUGH)

The complete requirements for procuring the boot described herein shall consist of this document and the latest issue of Specification MIL-B-5423.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

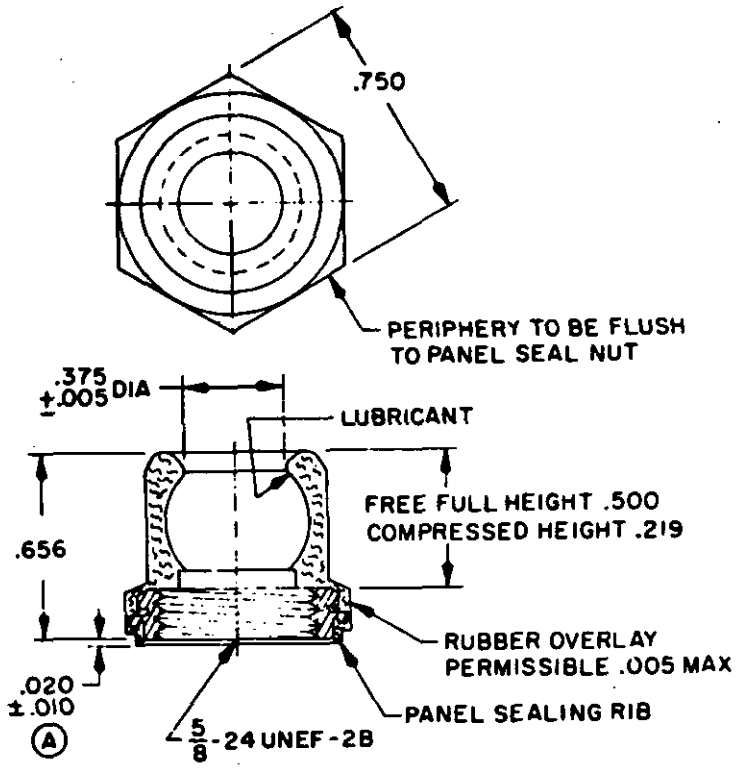

INCHES	MM
.005	.13
.010	.25
.015	.38
.020	.51
.219	5.56
.375	9.53
.500	12.70
.656	16.66
.750	19.05

Not to be used for new design

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.015.

Ⓐ denotes changes.

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:42Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure

Silicone rubber: Grade 25

(A) Watertightness: Per MIL-STD-108, Table I

(A) Part number: M5423/08-01

Custodians:
Army - EL
Navy - AS
Air Force - 85

Review activities:
Army - EL, MI
Navy - AS, EC
Air Force - 85
DSA - ES

User activities:
Army - AT, ME, AV
Navy - MC, CG, OS
Air Force -

Preparing activity:
Army - EL

(Project number 5930-0508-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:42Z
Check the source to verify that this is the current version before use.