
MILITARY SPECIFICATION SHEET

BOOTS, DUST AND WATER SEAL, TYPE A (FOR TOGGLE SWITCHES) STYLE 1 (ONE-HOLE MOUNTING, ENCLOSED) STYLE 1S (RFI-SHIELDED, ONE-HOLE MOUNTING, ENCLOSED)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the boots described herein shall consist of this specification and the latest issue of Specification MIL-B-5423.

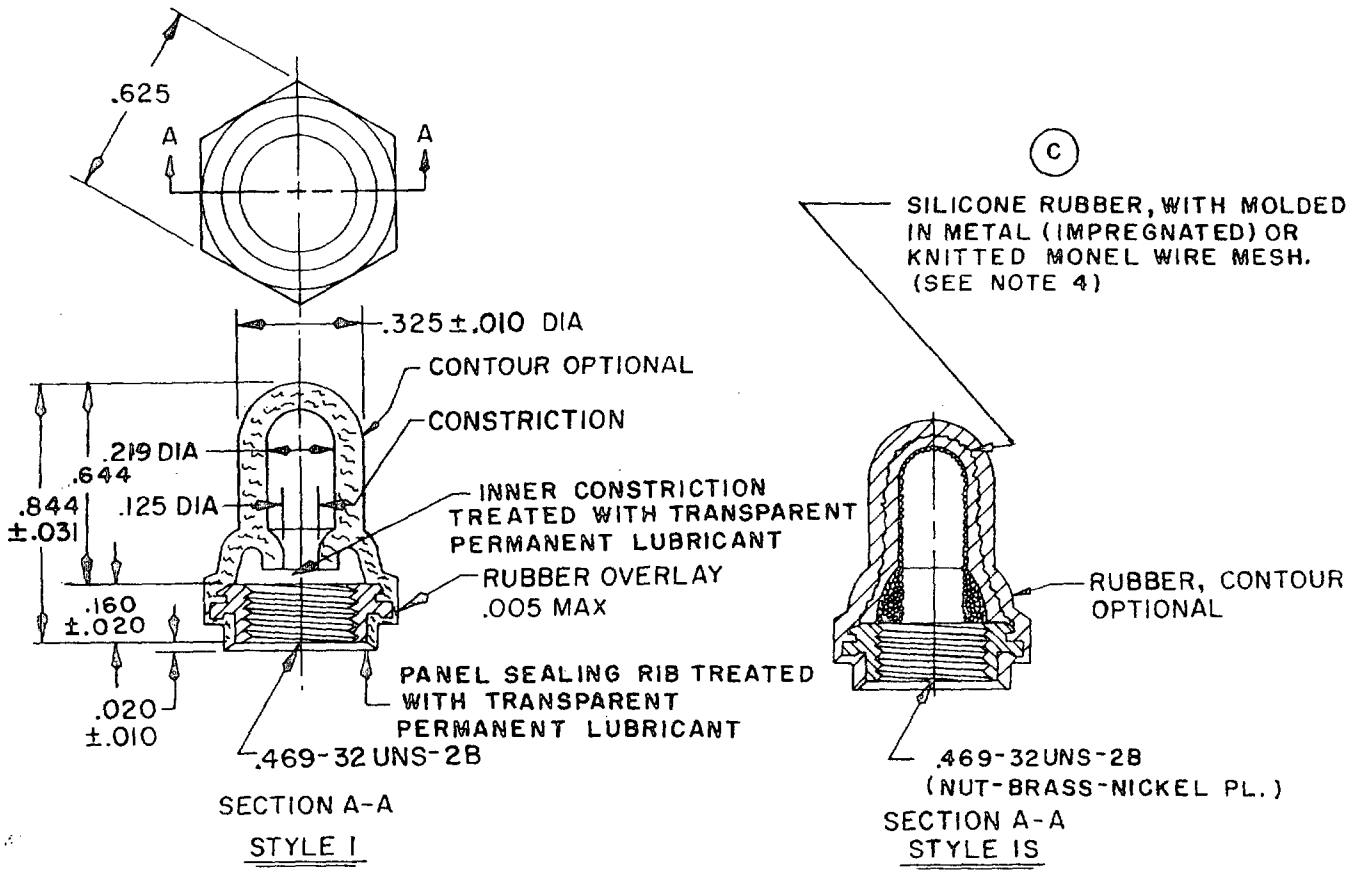

INCHES	MM	INCHES	MM
.005	.13	.219	5.56
.010	.25	.325	8.26
.015	.38	.469	11.91
.020	.51	.625	15.88
.125	3.18	.664	16.87
.160	4.06	.844	21.44

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.015 (.38 mm).
4. Monel per QQ-N-281, class A.

FIGURE 1. Boots, type A, style 1 and style 1S.

(C) denotes changes.

FSC 5930

Source: https://assist.dla.mil - Downloaded: 2026-10-17T04:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Silicone rubber: Grade 50.

Ⓒ Restoring force (style 1): 5 inch-ounces.

Ⓒ Watertightness: Inner constriction test required.

Endurance:

Style 1: In accordance with MIL-B-5423.

Style 1S: 15,000 cycles of mechanical operations.

Part number:

Style 1: M5423/01-01.

Style 1S: M5423/01-02.

NOTE: Style 1S - Toggle switches selected for use with these boots should have adequate operating force to avoid any tendency of the boot to return to a position other than that in which it is set.

Custodians:
Army - ER
Navy - AS
Air Force - 85

Review activities:
Army - MI
Navy - EC
Air Force - 11, 99
DLA - ES

User activities:
Army - AT, AV, ME
Navy - CG, MC, OS

Agent:
DLA - ES

Preparing activity:
Army - ER

(Project 5930-1174-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:39Z
Check the source to verify that this is the current version before use.