
INCH-POUND
MIL-DTL-5423/1E
4 February 2008
SUPERSEDING
MIL-DTL-5423/1D
24 May 2002

DETAIL SPECIFICATION SHEET

BOOTS, DUST AND WATER SEAL, TYPE A (FOR TOGGLE SWITCHES), STYLE 1 (ONE – HOLE MOUNTING, ENCLOSED) STYLE 1S (RFI-SHIELDED, ONE - HOLE MOUNTING, ENCLOSED)

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-5423.

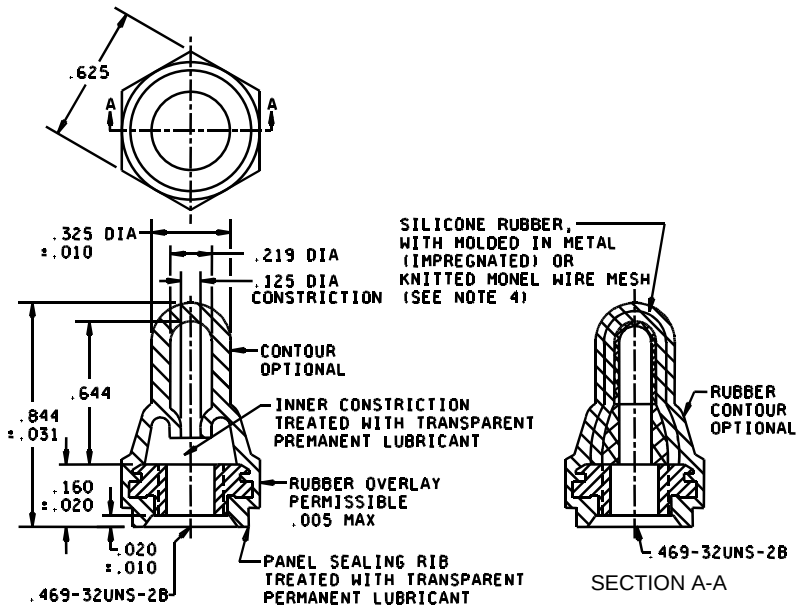

SECTION A-A

STYLE 1

SECTION A-A

STYLE 1S

Inches	mm	Inches	mm
.005	0.13	.219	5.56
.010	0.25	.325	8.26
.020	0.51	.469	11.91
.031	0.79	.625	15.88
.125	3.18	.644	16.36
.160	4.06	.844	21.44

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.015 (0.38 mm).

FIGURE 1. Boots, type A, style 1 and style 1S.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Silicon rubber: Grade 50.

Restoring force (style 1): 5 inch–ounces.

Watertightness: Inner constriction test required.

Endurance:
Style 1: In accordance with MIL-DTL-5423.
Style 1S: 15,000 cycles of mechanical operations.

Part or Identifying Number (PIN):
Style 1: M5423/01-01.
Style 1S: M5423/01-02.

NOTE: Style 1S Toggle switches selected for use with these boots should have adequate operating force to avoid any tendency of the boot to return to a position other than that in which it is set.

Qualification: Not Applicable.

First Article Testing:
Style 1: In accordance with MIL-DTL-5423 Table II.
Style 1S: In accordance with MIL-DTL-5423 Table III.

Conformance Inspection: Group A and B In accordance with MIL-DTL-5423 (Table IV and VI) per sampling plan as prescribed in Table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:39Z
Check the source to verify that this is the current version before use.

The margins of this specification are marked with vertical lines to indicate where modifications were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents:
MIL-DTL-5423

Custodians:
Army - CR
Navy - AS
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2008-021)

Review activities:
Army – AT, AV, CR4, MI
Navy – CG, EC, MC, OS
Air Force - 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:39Z
Check the source to verify that this is the current version before use.