MILITARY SPECIFICATION SHEET

BOOT, DUST AND WATER SEAL, TYPE A (FOR TOGGLE SWITCHES), STYLE 3 (ONE-HOLE MOUNTING, THROUGH)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the boot described herein shall consist of this specification and the latest issue of Specification MIL-B-5423.

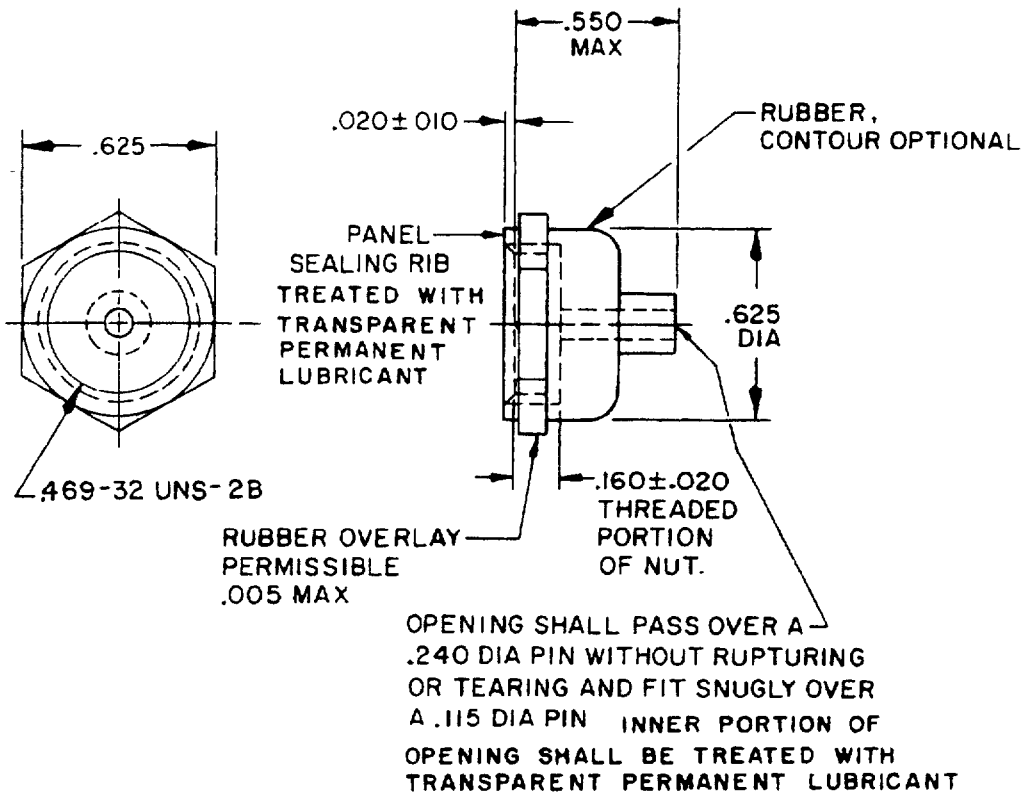

INCHES	MM
.005	.13
.010	.25
.020	.51
.115	2.92
.160	4.06
.240	6.10
.469	11.91
.550	13.97
.625	15.88

NOTES.
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.015 (.38 mm).

FIGURE 1. Boot type A, style 3.

(C) denotes changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:40Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration See figure 1.

Silicone rubber Grade 50

(C) Restoring force 5 inch-ounces.

Operation of guards Applicable.

Part number M5423/02-01.

Custodians
Army - ER
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11, 99
DLA - ES

User activities.
Army - AT, AV, ME
Navy - CG, MC, OS

Agent:
DLA - ES

Preparing activity:
Army - ER

(Project 5930-1174-2)

* U.S.GOVERNMENT PRINTING OFFICE 1992-508-022/3130 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:40Z
Check the source to verify that this is the current version before use.