INCH-POUND


MIL-DTL-5423/2D
24 May 2002
SUPERSEDING
MIL-B-5423/2C
1 June 1982

DETAIL SPECIFICATION SHEET

BOOT, DUST AND WATER SEAL, TYPE A (FOR TOGGLE SWITCHES), STYLE 3 (ONE – HOLE MOUNTING, THROUGH)

This specification forms a part of MIL-DTL-5423, dated 5 April 2002, and is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-5423.

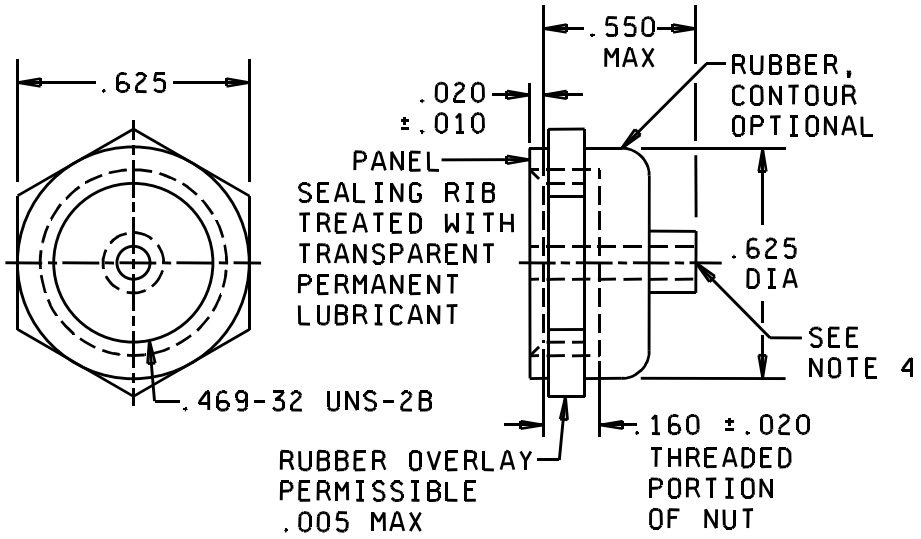

Inches	mm	Inches	mm
.005	0.13	.160	4.06
.010	0.25	.240	5.10
.115	0.38	.469	11.91
.020	0.51	.550	13.97
.115	2.92	.625	15.88

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.015 (0.38 mm).
4. Opening shall pass over a .240 pin without rupturing or tearing and fit snugly over a .115 diameter pin. Inner portion of opening shall be treated with transparent lubricant.

FIGURE 1. Dimensions and configuration boot type A, style 3.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Silicon rubber: Grade 50.

Restoring force: 5 inch – ounces.

Operation of guards: Applicable.

Part or Identifying Number (PIN): M5423/02-01.

Custodians:
Army - CR
Navy - AS
Air Force - 11
DLA - CC

Review activities:
Army – AT, AV, CR4, MI
Navy – CG, EC, MC, OS
Air Force - 99

Preparing activity:
DLA - CC

(Project 5930-1735-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:39Z
Check the source to verify that this is the current version before use.