MILITARY SPECIFICATION SHEET

BOOT, DUST AND WATER SEAL, TYPE A (FOR TOGGLE SWITCHES), STYLE 6 (ONE-HOLE MOUNTING, MINIATURE, ENCLOSED)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the boot described herein shall consist of this specification and the latest issue of Specification MIL-B-5423.

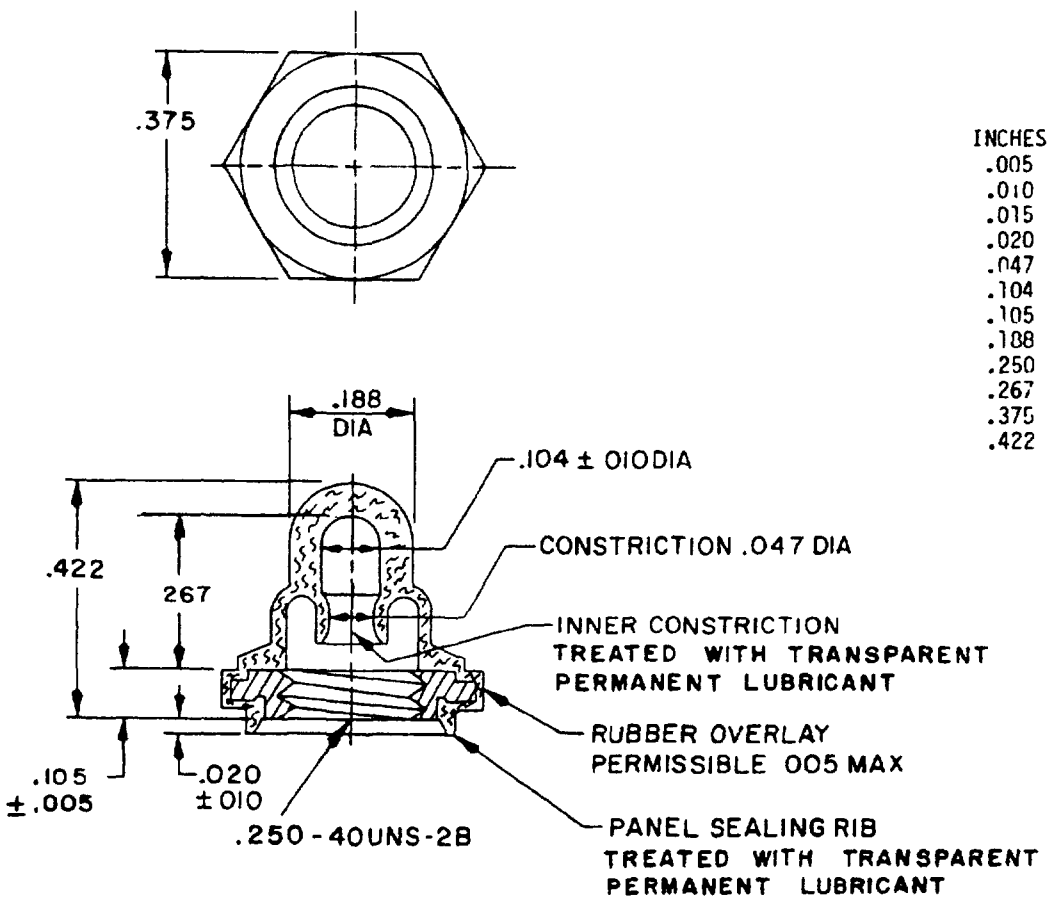

INCHES	MM
.005	.13
.010	.25
.015	.38
.020	.51
.047	1.19
.104	2.64
.105	2.67
.188	4.78
.250	6.35
.267	6.78
.375	9.53
.422	10.72

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.015 (.38 mm).

FIGURE 1. Boot type A, style 6.

(B) denotes changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:40Z
Check the source to verify that this is the current version before use.

FSC 5930

REQUIREMENTS.

Dimensions and configuration See figure 1.

Silicone rubber: Grade 50.

(B) Restoring force 7/8 inch-ounce.

(B) Watertightness: Inner constriction test required.

Part number: M5423/04-01.

Custodians:
Army - ER
Navy - AS
Air Force - 85

Review activities:
Army - MI
Navy - EC
Air Force - 11, 99
DLA - ES

User activities:
Army - AT, AV, ME
Navy - CG, MC, OS

Agent:
DLA - ES

Preparing activity:
Army - ER

(Project 5930-1174-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:40Z
Check the source to verify that this is the current version before use.