INCH-POUND

MIL-DTL-5423/4C
24 May 2002
SUPERSEDING
MIL-B-5423/4B
1 June 1982

DETAIL SPECIFICATION SHEET

BOOT, DUST AND WATER SEAL, TYPE A (FOR TOGGLE SWITCHES), STYLE 6 (ONE – HOLE MOUNTING, MINIATURE, ENCLOSED)

This specification forms a part of MIL-DTL-5423, dated 5 April 2002, and is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-5423.

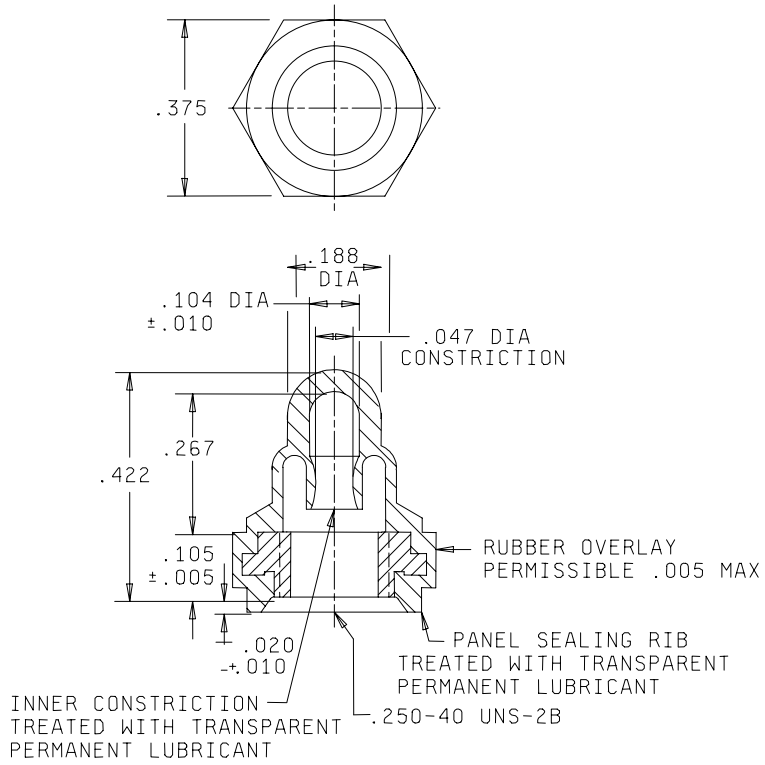

Inches	mm	Inches	mm	Inches	mm
.005	0.13	.047	1.19	.250	6.35
.010	0.25	.104	2.64	.267	6.78
.015	0.38	.105	2.67	.375	9.53
.020	0.51	.188	4.78	.422	10.72

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.015 (.38 mm).

FIGURE 1. Dimensions and configuration boot type A, style 6.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:40Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Silicon rubber: Grade 50.

Restoring force: .875 inch-ounces.

Watertightness: Inner construction test required.

Part or Identifying Number (PIN): M5423/04-01.

Custodians:
Army - CR
Navy - AS
Air Force - 11
DLA - CC

Review activities:
Army – AT, AV, MI, CR4
Navy – CG, EC, MC, OS
Air Force - 99

Preparing activity:
DLA - CC

(Project 5930-1735-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:40Z
Check the source to verify that this is the current version before use.