MILITARY SPECIFICATION SHEET

BOOT, DUST AND WATER SEAL, TYPE A (FOR TOGGLE SWITCHES), STYLE 7 (ONE-HOLE MOUNTING, SUBMINIATURE, ENCLOSED)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the boot described herein shall consist of this specification and the latest issue of MIL-B-5423.

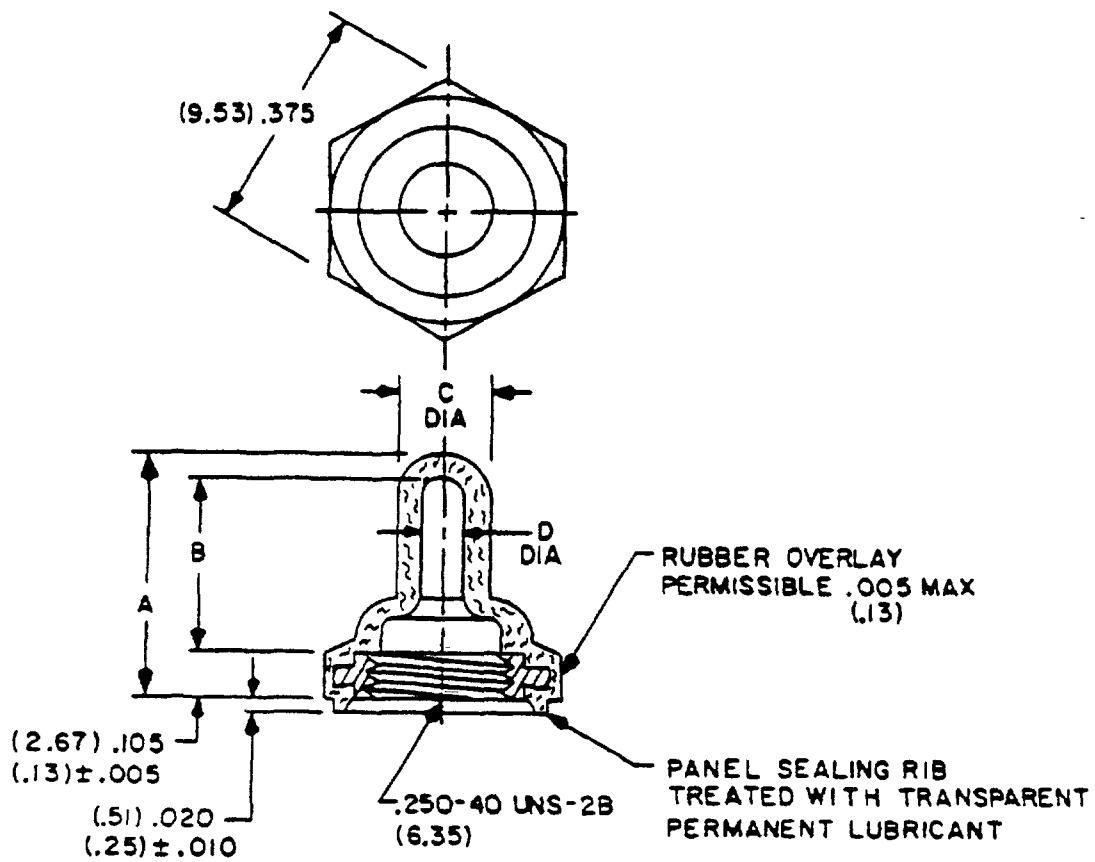

Size	Dimensions ±.015 (0.38)				Part number M5423/05-
	A	B	C	D±.005 (0.13)	
1	.486 (12.34)	.345 (8.76)	.172 (4.37)	.070 (1.78)	01
2	.391 (9 93)	.270 (6.86)	.141 (3.58)	070 (1.78)	02

NOTES:
1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents are given for general information only.
4. Unless otherwise specified, tolerance is ± 015 (0.38 mm).

FIGURE 1. Boot type A, style 7.

Ⓒ denotes changes.

FSC 5930

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:41Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1.

Silicone rubber:

Size 1 boots: Grade 25 (shall meet the requirements of grade 30 except for a durometer of 25).

Size 2 boots: Grade 50.

Restoring force: 5/8 inch-ounce.

Part number: See figure 1.

Custodians:
Army - ER
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11, 99
DLA - ES

User activities:
Army - AT, AV, ME
Navy - CG, MC, OS

Agent:
DLA - ES

Preparing activity:
Army - ER

(Project 5930-1298)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:41Z
Check the source to verify that this is the current version before use.