INCH-POUND

MIL-DTL-5423/5D
24 May 2002
SUPERSEDING
MIL-B-5423/5C
23 September 1985


MILITARY SPECIFICATION SHEET

BOOT, DUST AND WATER SEAL, TYPE A (FOR TOGGLE SWITCHES), STYLE 7 (ONE – HOLE MOUNTING, SUBMINIATURE, ENCLOSED)

This specification forms a part of MIL-DTL-5423, dated 5 April 2002, and is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-5423.

Inches	mm
.005	0.13
.010	0.25
.020	0.51
.105	2.67
.250	6.35
.375	9.53

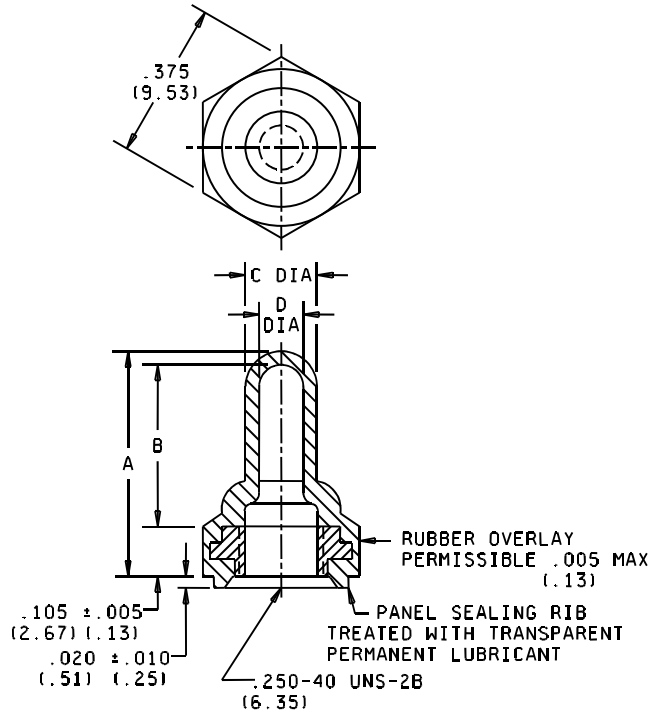

Size	Dimensions ± .015 (0.38)				PIN M5423/05-
	A	B	C	D ± .005 (0.13)	
1	.486 (12.34)	.345 (8.76)	.172 (4.37)	.070 (1.78)	01
2	.391 (9.93)	.270 (6.86)	.141 (3.58)	.070 (1.78)	02

NOTES:
1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
4. Unless otherwise specified, tolerances are ±.015 (.38 mm).

FIGURE 1. Dimensions and configuration boot type A, style 7.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:41Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Silicon rubber:

Size 1 boots: Grade 25 (shall meet the requirements of grade 30 except for a durometer of 25).

Size 2 boots: Grade 50.

Restoring force: .625 inch–ounce.

Part or Identifying Number (PIN): See figure 1.

Custodians:
Army - CR
Navy - AS
Air Force - 11
DLA - CC

Review activities:
Army – AR, AT, AV, CR4, MI
Navy – CG, EC, MC, OS
Air Force - 99

Preparing activity:
DLA - CC

(Project 5930-1735-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:41Z
Check the source to verify that this is the current version before use.