INCH-POUND
MIL-DTL-5423/9E
4 February 2008
SUPERSEDING
MIL-DTL-5423/9D
24 May 2002

DETAIL SPECIFICATION SHEET

BOOTS, DUST AND WATER SEAL, TYPE C (FOR USE AS ROTARY-SHAFT SEALS), TYPE CS (FOR USE AS RFI-SHIELDED, ROTARY-SHAFT SEALS)

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-5423.

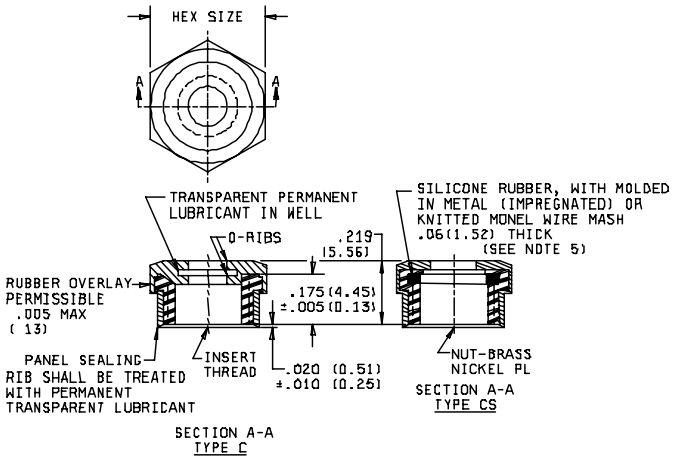

Size	For use with shaft size ±.004 (.10)	Insert thread	Hex size
1	.125 (3.18 mm)	.375-32 UNEF-2B	.500 (12.70 mm)
2	.250 (6.35 mm)	.375-32 UNEF-2B	.500 (12.70 mm)
4	.125 (3.18 mm)	.250-32 UNEF-2B	.375 (9.53 mm)
6	.250 (6.35 mm)	.469-32 UNS-2B	.625 (15.88 mm)
7	.375 (9.53 mm)	.625-24 UNEF-2B	.750 (19.05 mm)
9	.250 (6.35 mm)	.500-32 UN-2B	.625 (15.88 mm)
10	1/ .250 (6.35 mm)	.375-32 UNEF-2B	.500 (12.70 mm)

1/ Height for size 10 seal is .359 (9.12 mm).

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.015 (0.38 mm) for three place decimals and ±.02 (0.51 mm) for two place decimals.
4. Monel in accordance with QQ-N-281, class A or equivalent.

FIGURE 1. Dimensions and configuration boots type B, style 2 and style 2S.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:42Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1.

Silicon rubber: Grade 60

Part or Identifying Number (PIN): See table I.

TABLE I. PIN's, size, and type.

PIN M5423/09-	Size	
	Type C	Type CS
01	1	---
02	2	---
03	4	---
04	6	---
05	7	---
06	9	---
07	---	1
08	---	2
09	---	4
10	---	6
11	---	7 1/
12	---	9
13	10	---
14	---	10

1/ Inactive for new design.

Qualification: Not Applicable.

First Article Testing:
Type C: In accordance with MIL-DTL-5423 Table II.
Type CS: In accordance with MIL-DTL-5423 Table III.

Conformance Inspection: Group A and B In accordance with MIL-DTL-5423 (Table IV and VI) per sampling plan as prescribed in Table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:42Z
Check the source to verify that this is the current version before use.

The margins of this specification are marked with vertical lines to indicate where modifications were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents:
MIL-DTL-5423
QQ-N-281

Custodians:
Army - CR
Navy - AS
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2008-029)

Review activities:
Army – AR, AT, AV, CR4, EA, MI
Navy – CG, EC, MC, OS
Air Force – 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:42Z
Check the source to verify that this is the current version before use.