FED. SUP CLASS
2805

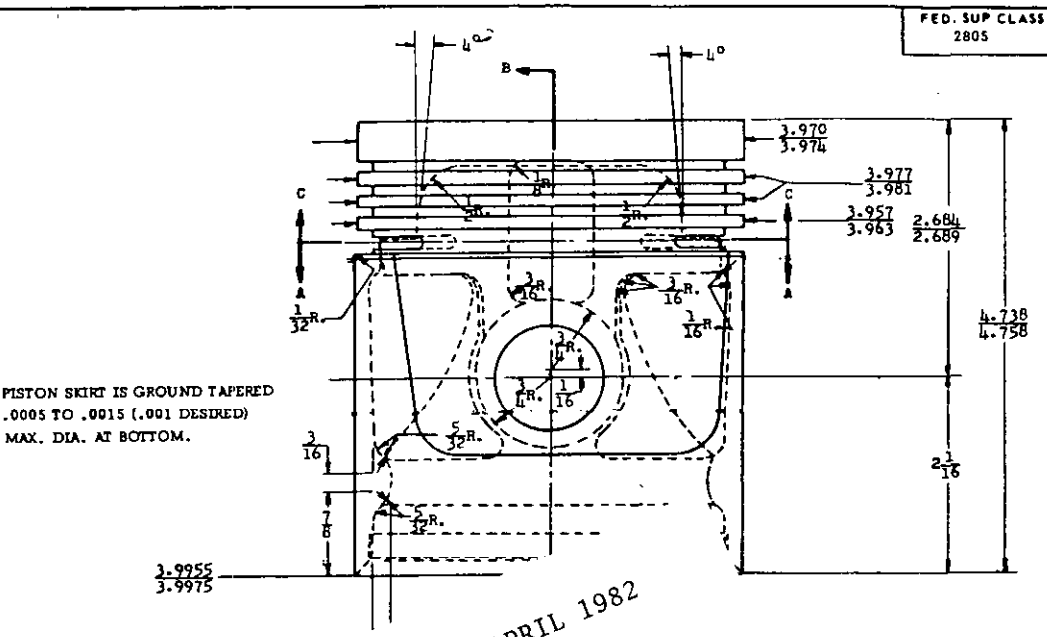

PISTON SKIRT IS GROUND TAPERED
.0005 TO .0015 (.001 DESIRED)
MAX. DIA. AT BOTTOM.

Ⓓ CANCELED AFTER 21 APRIL 1982
NO SUPERSEDING STANDARD.

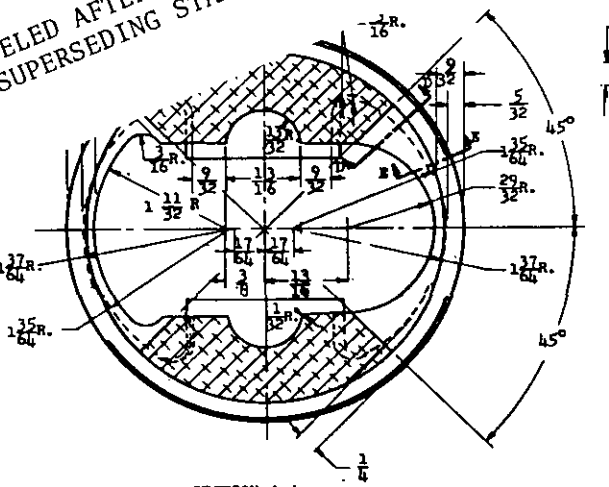

SECTION A-A



SECTION E-E

WT. OF FIN. PISTON:
1035 ± 3 GRAMS.

© ENTIRE STANDARD REVISED

P.A. ARMY MD(ENGR.) Other Cust A.F. - 69 NAVY - YD	TITLE PISTON, INTERNAL COMBUSTION ENGINE: 4" X 4-3/4"	PART NO. MS13953-1 MILITARY STANDARD MS 13953
PROCUREMENT SPECIFICATION MIL-E-11275	SUPERSEDES:	SHEET 1 OF 5

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

REVIEW ACTIVITY : DCSC, 69
USER ACTIVITY : YD, ATAC

APPROVED 19 JUNE 1953. REVISED Ⓐ 27 NOVEMBER 1958 Ⓑ 24 OCTOBER 1955 Ⓒ 7 MAR 1966 Ⓓ 21 APRIL 1982

This Military Standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:31Z
Check the source to verify that this is the current version before use.