
FED. SUP CLASS
5306

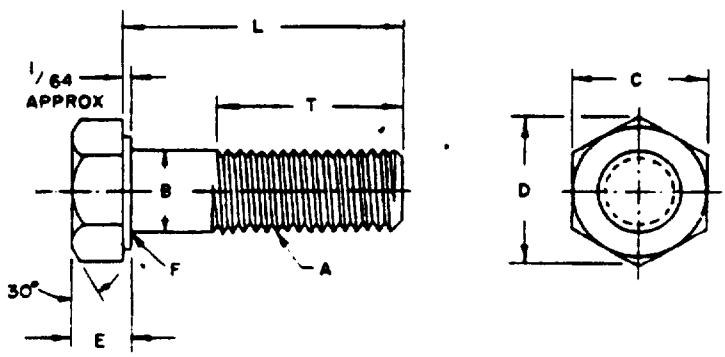

APPROVED 8 May 1957 REVISED (A) 19 August 1966 (B) 29 November 1989

(B) Denotes Changes

P. A. SH Other Cust	INTERNATIONAL INTEREST	TITLE Bolts, Machine, Hexagon Head, Semifinished Corrosion Resisting Steel UNC-2A, Nonmagnetic	MILITARY STANDARD
			MS 16208(SH)
PROCUREMENT SPECIFICATION MIL-S-1222 (B)	SUPERSEDES:		SHEET 1 OF 6

DD FORM 672-1 (LIMITED COORDINATION)

(Project 5306-N174)

This military standard is approved by the Naval Sea Systems Command, Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:54Z
Check the source to verify that this is the current version before use.

This military standard is approved by the Naval Sea Systems Command, Department or the Navy, and shall be used by that activity. All other military activities are required to employ this standard where suitable.

P.A. SH
Other Cust

PROCUREMENT SPECIFICATION (B) MIL-S-1222

INTERNATIONAL INTEREST

SUPERSEDES

TITLE Bolts, Machine, Hexagon Head, Semi-Finished, Corrosion Resisting Steel UNC-2A, Nonmagnetic

(B) Denotes changes

MILITARY STANDARD

MS 16208(SH)

SHEET 2 OF 6

FED. SUP CLASS 5306

Nominal size		1/4	5/16	3/8	7/16
(A) Threads per inch		20-UNC2A	18-UNC2A	16-UNC2A	14-UNC2A
(B) Body diameter	Max	0.250	0.312	0.375	0.437
	Min	.217	.276	.334	.394
(C) Width across flats	Max	.437	.500	.562	.625
	Min	.425	.484	.544	.603
(D) Width across corners	Max	.505	.577	.650	.722
	Min	.484	.552	.620	.687
(E) Head height	Max	.163	.211	.243	.291
	Min	.150	.195	.226	.272
(F) Radius	Max	.031	.031	.031	.031
	Min	.009	.009	.009	.009

(L) Length	Tolerance Size 1/4 to 3/8	Tolerance Size 7/16 to 1/2	Tolerance Size 5/8 to 1-1/4	MS part no	FIIN	MS part no	FIIN	MS part no	FIIN	MS part no	FIIN
1/4				1		--		--		--	
3/8				2		25		46		--	
1/2				3		26		47		76	
5/8				4		27		48		--	
3/4				5		28		49		77	
7/8				6		29		50		--	
1				7		30		51		78	
1-1/4				8		31		52		79	
1-1/2				9		32		53		80	
1-3/4				10		33		54		81	
2				11		34		55		82	
2-1/4				12		35		56		83	
2-1/2				13		36		57		84	
2-3/4	±1/32	±1/16	±1/8	14		37		58		85	
3				15		38		59		86	
3-1/4				16		39		60		87	
3-1/2				17		40		61		88	
3-3/4				18		41		62		89	
4				19		42		63		90	
4-1/4				--		--		64		91	
4-1/2				--		--		65		92	
4-3/4				--		--		66		93	
5				--		--		67		94	
5-1/2				--		--		68		--	
6				--		--		69		--	
6-1/2				--		--		70		--	
7				--		--		71		--	
7-1/2				--		--		--		--	
8				--		--		--		--	
9				--		--		--		--	

APPROVED 8 May 1957 REVISED (A) 19 August 1966 (B) 29 November 1989

DD FORM 672-1 (LIMITED COORDINATION)

Source: https://assist.dla.mil - Downloaded: 2026-10-23T13:54:44 (Project 5306-N174)
Check the source to verify that this is the current version before use.

This military standard is approved by the Naval Sea Systems Command, Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.

Nominal size (Continued)					1/4		5/16		3/8		7/16	
(A) Threads per inch (Continued)					20-UNC2A		18-UNC2A		16-UNC2A		14-UNC2A	
(L) Length (Continued)	Tolerance				MS part no	FIIN	MS part no	FIIN	MS part no	FIIN	MS part no	FIIN
	Size 1/4 to 3/8	Size 7/16 to 1/2	Size 5/8 to 1-1/4									
10	±1/16	±3/32	±3/16		--		--		--		--	
11					--		--		--		--	
12					--		--		--		--	
13					--		--		--		--	
14					--		--		--		--	
15					--		--		--		--	
16					--		--		--		--	
18					--		--		--		--	
20					--		--		--		--	
Nominal size					1/2		5/8		3/4		7/8	
(A) Threads per inch					13-UNC2A		11-UNC2A		10-UNC2A		9-UNC2A	
(B) Body diameter				Max	0.500		0.625		0.750		0.875	
				Min	.450		.566		.685		.803	
(C) Width across flats				Max	.750		.937		1.125		1.312	
				Min	.725		.906		1.088		1.269	
(D) Width across corners				Max	.866		1.083		1.299		1.516	
				Min	.826		1.033		1.240		1.447	
(E) Head height				Max	.323		0.403		0.483		0.563	
				Min	.302		.378		.455		.531	
(F) Radius				Max	.031		.062		.062		.062	
				Min	.009		.021		.021		.021	
(L) Length	Tolerance				MS part no	FIIN	MS part no	FIIN	MS part no	FIIN	MS part no	FIIN
	Size 1/4 to 3/8	Size 7/16 to 1/2	Size 5/8 to 1-1/4									
1/4	±1/32	±1/16	±1/8		---		---		---		---	
3/8					---		---		---		---	
1/2					100		---		---		---	
5/8					---		---		---		---	
3/4					101		135		161		195	
7/8					---		---		---		---	
1					102		136		162		196	
1-1/4					103		137		163		197	
1-1/2					104		138		164		198	
1-3/4					105		139		165		199	
2					106		140		166		200	
2-1/4					107		141		167		201	
2-1/2					108		142		168		202	
2-3/4					109		143		169		203	
3					110		144		170		204	
3-1/4					111		145		171		205	
3-1/2					112		146		172		206	

(R) Denotes changes

APPROVED 8 May 1957 REVISED (A) 19 August 1966 (R) 29 November 1989

PROCUREMENT SPECIFICATION (B) MIL-S-1222 SUPERSEDES:

INTERNATIONAL INTEREST

P. A. SH Other Cust

TITLE Bolts, Machine, Hexagon Head, Semi-Finished, Corrosion Resisting Steel UNC-2A, Nonmagnetic

MILITARY STANDARD

MS 16208(SH)

SHEET 3 OF 6

FED. SUP CLASS 5306

DD FORM 672-1 (LIMITED COORDINATION)

(Project 5306-N174)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:54
Check the source to verify that this is the current version before use.

This military standard is approved by the Naval Sea Systems Command, Department of the Navy, and shall be used by that activity. All other military activities are required to employ this standard where suitable.

Nominal size (Continued)				1/2		5/8		3/4		7/8	
(A) Threads per inch (Continued)				13-UNC2A		11-UNC2A		10-UNC2A		9-UNC2A	
(L) Length (Continued)	Tolerance			MS part no	FIIN	MS part no	FIIN	MS part no	FIIN	MS part no	FIIN
	Size 1/4 to 3/8	Size 7/16 to 1/2	Size 5/8 to 1-1/4								
3-3/4				113		147		173		207	
4				114		148		174		208	
4-1/4				115		149		175		209	
4-1/2				116		150		176		210	
4-3/4				117		151		177		211	
5				118		152		178		212	
5-1/2				119		153		179		213	
6				120		154		180		214	
6-1/2				121		155		181		215	
7				122		156		182		216	
7-1/2				123		157		183		217	
8				---		158		184		218	
9				125		---		185		219	
10				---		---		186		220	
11				---		---		187		---	
12	±1/16	±3/32	±3/16	128		---		188		---	
13				---		---		189		---	
14				---		---		190		---	
15				---		---		191		---	
16				---		---		192		---	
18				---		---		193		---	
20				---		---		194		---	

(B) Denotes changes

P.A. SH Other Cust

PROCUREMENT SPECIFICATION (B) MIL-S-1222

INTERNATIONAL INTEREST

SUPERSEDES:

TITLE Bolts, Machine, Hexagon Head, Semi-Finished, Corrosion Resisting Steel UNC-2A, Nonmagnetic

MILITARY STANDARD

MS 16208(SH)

SHEET 4 OF 6

FED. SUP CLASS 5306

APPROVED 8 May 1957 REVISED (A) 19 August 1966 (B) 29 November 1989

DD FORM 672-1 (LIMITED COMMERCIAL USE) (Project 5306-N174)

Source: https://assistdla.mil -- Downloaded: 2026-10-23T10:04Z
Check the source to verify that this is the current version before use.

This military standard is approved by the Naval Sea Systems Command, Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.

DD FORM 672-1 (LIMITED COORDINATION)

PROCUREMENT SPECIFICATION (B) MIL-S-1222

SUPERSEDES:

INTERNATIONAL INTEREST

P.A. SH Other Cost

TITLE Bolts, Machine, Hexagon Head, Semi-Finished, Corrosion Resisting Steel UNC-2A, Nonmagnetic

MILITARY STANDARD

MS 16208(SH)

SHEET 5 OF 6

(B) Denotes changes

Nominal size			1		1-1/8		1-1/4		1-3/8		1-1/2	
(A) Threads per inch			8-UNC2A		7-UNC2A		7-UNC2A		6-UNC2A		6-UNC2A	
(B) Body diameter	Max		1.000		1.125		1.125		1.375		1.500	
	Min		0.919		1.032		1.157		1.267		1.392	
(C) Width across flats	Max		1.500		1.687		1.875		2.062		2.250	
	Min		1.450		1.631		1.812		1.994		2.175	
(D) Width across corners	Max		1.732		1.949		2.165		2.382		2.598	
	Min		1.653		1.859		2.066		2.273		2.480	
(E) Head height	Max		0.6 7		0.718		0.813		0.878		0.974	
	Min		.591		.658		.749		.810		.902	
(F) Radius	Max		.093		.093		.093		.093		.093	
	Min		.062		.062		.062		.062		.062	
(L) Length	Tolerance		MS part no	FIIN	MS part no	FIIN	MS part no	FIIN	MS part no	FIIN	MS part no	FIIN
	Size 1/4 to 3/8	Size 7/16 to 1/2	Size 5/8 to 1-1/2									
1/4				---		---		---		---		
3/8				---		---		---		---		
1/2				---		---		---		---		
5/8				---		---		---		---		
3/4				---		---		---		---		
7/8				---		---		---		---		
1				226		256		281		---		
1-1/4				227		257		282		---		
1-1/2				228		258		283		---		
1-3/4				229		259		284		---		
2				230		260		285		---		
2-1/4				231		261		286		---		
2-1/2				232		262		287		---		
2-3/4	±1/32	±1/16	±1/8	233		263		288		---		
3				234		264		289		---		
3-1/4				235		265		290		---		
3-1/2				236		266		291		---		
3-3/4				237		267		292		---		
4				238		268		293		---		
4-1/4				239		269		294		---		
4-1/2				240		270		295		---		
4-3/4				241		271		296		---		
5				242		272		297		---		
5-1/2				243		273		298		---		
6				244		274		299		---		
6-1/2				245		---		---		---		
7				246		---		---		---		
7-1/2				247		---		---		---		
8				248		---		---		---		
9				249		---		---		---		
10				250		---		---		---		

FED. SUP CLASS 5306

APPROVED 8 May 1957 REVISED (A) 19 August 1966 (B) 29 November 1989

Downloaded from https://assist.dla.mil on 2026-10-23T13:50:42Z Project 5306-N174)
Check the source to verify that this is the current version before use.

This military standard is approved by the Naval Sea Systems Command, Department of the Navy, and shall be used by that activity. All other military activities are required to employ this standard where suitable.

Nominal size (Continued)				1		1-1/8		1-1/4		1-3/8		1-1/2	
(A) Threads per inch (Continued)				8-UNC2A		7-UNC2A		7-UNC2A		6-UNC2A		6-UNC2A	
(L) Length (Continued)	Tolerance			MS part no	FIIN	MS part no	FIIN	MS part no	FIIN	MS part no	FIIN	MS part no	FIIN
	Size 1/4 to 3/8	Size 7/16 to 1/2	Size 5/8 to 1-1/2										
11	±1/16	±3/32	±3/16	---		---		---		---		---	
12				---		---		---		---		---	
13				---		---		---		---		---	
14				---		---		---		---		---	
15				---		---		---		---		---	
16				---		---		---		---		---	
18				---		---		---		---		---	
20				---		---		---		---		---	

(B) Material: Austenitic corrosion resisting steel shall be in accordance with class 303, 303SE, 304, 305, 316, 321, 347, or 384 of ASTM F 593.
Magnetic permeability: Magnetic permeability shall be $m\mu$ = 2.0 maximum when measured with a permeability indicator in accordance with MIL-I-17214.
Protective coating: Passivate in accordance with QQ-P-35.
(B) Threads: Threads shall be UNC2A in accordance with FED-STD-H28.
Thread length: Minimum thread length shall be twice the nominal size (diameter) plus 1/4 inch for lengths to 6 inches inclusive and twice the moninal diameter plus 1/2 inch for lengths over 6 inches. Bolts too short for minimum thread length shall be threaded as close to the head as practicable.
Dimensions: All dimensions are in inches, unless otherwise specified.

NOTES:
1. In case of conflict with any document referenced herein, this standard shall govern.
2. Referenced documents shall be the issue in effect on date of invitation for bids.

(B) Denotes changes

PROCUREMENT SPECIFICATION (B) MIL-S-1222
INTERNATIONAL INTEREST
SUPERSEDES:
P.A. SH Other Cust
TITLE Bolts, Machine, Hexagon Head, Semi-Finished, Corrosion Resisting Steel UNC-2A, Nonmagnetic
MILITARY STANDARD
MS 16208(SH)
SHEET 6 OF 6
FED. SUP CLASS 5306
APPROVED 8 May 1957 REVISED (A) 19 August 1966 (B) 29 November 1989

DD FORM 672-1 (OVERPRINTED)

Source: https://assist.dla.mil - Downloaded: 2026-10-29T19:54Z
Check to verify that this is the current version before use. (Project 5306-N174)