INCH-POUND


MS21259F
22 FEBRUARY 1999
Superseding
MS21259E
15 August 1997

MILITARY SPECIFICATION SHEET


TERMINAL, WIRE ROPE, STUD

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.


The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-DTL-781.

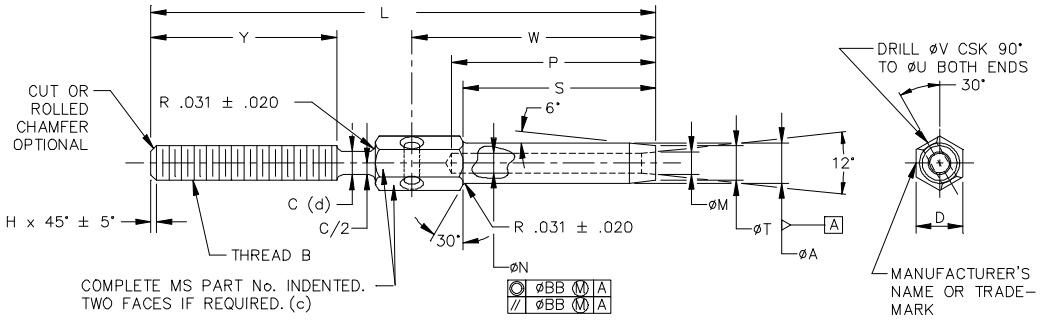

BEFORE SWAGING

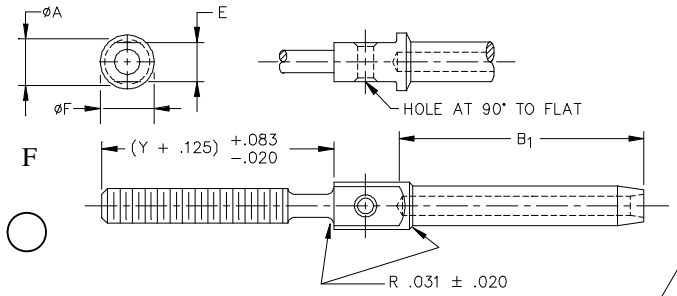

OPTIONAL DESIGN BEFORE SWAGING

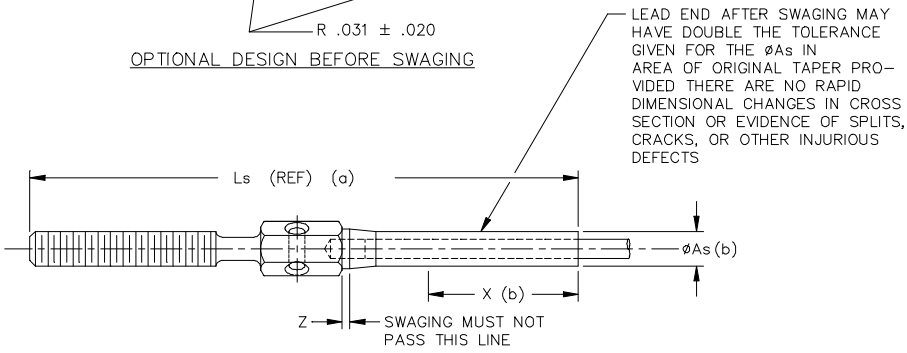

AFTER SWAGING

(a) Reference dimensions are for design purposes only and are not an inspection requirement.
(b) Swaged terminals shall conform to ∅As for length X.
(c) For terminal sizes –2 thru –5 use basic part number only, example: MS21259.
(d) Undercut (∅C) is optional for rolled threads only. The .031 ± .020 shall be required in any case.

(F) Denotes change(s)

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:29Z
Check the source to verify that this is the current version before use.

MS PART NUMBERS		NOM CABLE DIA. REF	MIN. BREAKING STRENGTH LB (a)	THREAD B UN-3A UNF-3A	ØA		ØAs		B_1 ± .063	ØC		D	E +.000 -.010
CORROSION RESISTANT STEEL RH THREAD	LH THREAD												
MS21259-2RH	MS21259-2LH	.062 (1/16)	480	.1380 (# 6)-40	.160		.138		1.042	.121	+.017 -.005	.188	.156
MS21259-3RH	MS21259-3LH	.093 (3/32)	920	.1900 (#10)-32	.218		.190		1.261	.169	+.021 -.005	.250	.187
MS21259-4RH	MS21259-4LH	.125 (1/8)	2000	.2500 (1/4)-28	.250		.219	+.000 -.005	1.511	.226	+.024 -.005	.313	.250
MS21259-5RH	MS21259-5LH	.156 (5/32)	2800		.297		.250		1.761				
MS21259-6RH	MS21259-6LH	.187 (3/16)	4200	.3125 (5/16)-24	.359		.313		2.011	.285	+.028 -.005	.375	.312
MS21259-7RH	MS21259-7LH	.218 (7/32)	5600	.3750 (3/8)-24	.427	+.000 -.005	.375	+.000 -.007	2.261	.347		.438	.375
MS21259-8RH	MS21259-8LH	.250 (1/4)	7000		.494		.438		2.511			.500	.438
MS21259-9RH	MS21259-9LH	.280 (9/32)	8000	.4375 (7/16)-20	.563		.500		2.761	.405		.625	.563
MS21259-10RH	MS21259-10LH	.312 (5/16)	9800	.5000 (1/2)-20	.635		.563	+.000 -.008	3.011	.467		.688	.625
MS21259-12RH	MS21259-12LH	.375 (3/8)	14400	.5625 (9/16)-18	.703		.625		3.511	.529		.750	.688
MS21259-14RH	MS21259-14LH	.437 (7/16)	17600	.6250 (5/8)-18	.781		.688		4.011	.592		.812	.750
MS21259-16RH	MS21259-16LH	.500 (1/2)	22800		.844		.750	+.000 -.009	4.698		+.033 -.005	.875	.812
MS21259-18RH	MS21259-18LH	.562 (9/16)	28500	.7500 (3/4)-16	.984		.875		5.011	.717		1.000	.875
MS21259-20RH	MS21259-20LH	.625 (5/8)	35000	.8750 (7/8)-14	1.109		1.000	+.000 -.010	5.511	.842		1.125	1.000
MS21259-24RH	MS21259-24LH	.750 (3/4)	49600	1.0000 (1)-12	1.359		1.250	+.000 -.012	6.511	.967		1.437	1.125
MS21259-28RH	MS21259-28LH	.875 (7/8)	66500	1.1250 (1 1/8)-12	1.593	+.000 -.010	1.437		7.166	1.092		1.625	1.437
MS21259-32RH	MS21259-32LH	1.000 (1)	85400	1.2500 (1 1/4)-12	1.812		1.625		8.229	1.217		1.875	1.625

(F) (F) (F)

DASH NUM (SIZE)	ØF	H		L +.016 -.000	Ls REF	ØM		ØN		P		S +.062 -.000	ØT		ØU REF	ØV ± .005	W ± .016	X MIN	Y +.083 -.020 (b)	Z MIN	ØBB
		MAX	MIN																		
-2	.188	.031		2.473	2.65	.090		.078		1.042		.969	.138				1.174	.70	1.045		
-3	.250			2.879	3.00	.119		.109		1.261		1.188	.190	+.000 -.005	.094	.063	1.411	.80	1.204		
-4	.313			3.333	3.59	.154		.141		1.511		1.438	.219				1.682	1.05	1.376		
-5	.313			3.627	3.97	.188		.172	+.005 -.000	1.761	+.031 -.000	1.688	.250				1.958	1.29	1.376		
-6	.375	.047	.015	4.002	4.17	.223	+.010 -.000	.203		2.011		1.938	.313				2.237	1.31	1.453		.008 (1/16 FIM)
-7	.438			4.516	4.81	.257		.234		2.261		2.188	.375	+.000 -.007			2.518	1.55	1.625		
-8	.500			4.937	5.24	.291		.265		2.511		2.438	.438		.125	.098	2.784	1.70	1.750		
-9	.625			5.391	5.75	.326		.297		2.761		2.688	.500				3.076	1.89	1.875		
-10	.688			5.844	6.27	.360		.328		3.011		2.938	.563	+.000 -.008			3.326	2.05	2.000	.03	
-12	.750	.063	.031	6.656	7.06	.430		.390	+.008 -.000	3.511		3.438	.625				3.828	3.12	2.250		
-14	.812			7.437	7.91	.514	+.012 -.000	.468		4.011	+.047 -.000	3.938	.688				4.375	3.57	2.500		.010 (.020 FIM)
-16	.875			8.187	8.75	.584		.531	+.009 -.000	4.698		4.625	.750	+.000 -.009			5.093	4.31			
-18	1.000			9.125	9.72	.653		.594		5.011		4.938	.875				5.468	4.51	3.000		
-20	1.125	.078	.046	10.375	11.06	.722		.656	+.010 -.000	5.511		5.438	1.000	+.000 -.010	.156	.125	6.093	5.04	3.500		.015 (.030 FIM)
-24	1.438			12.063	12.64	.860	+.015 -.000	.781	+.012 -.000	6.511	+.062 -.000	6.438	1.250	+.000 -.012			7.188	5.80	4.000		
-28	1.625	.094	.062	13.226	13.99	1.013		.921		7.166		7.094	1.437				7.846	6.31	4.500		.020 (.040 FIM)
-32	1.812			14.969	15.88	1.151		1.046		8.229		8.156	1.625				9.000	7.26	5.000		

(a) TO ACHIEVE THE MINIMUM BREAKING STRENGTH, FOR THE TERMINAL TEST ONLY, A GALVANIZED CARBON STEEL WIRE ROPE SHALL BE USED.

(F) (b) INCLUDES LAST FULL THREAD ENGAGEMENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:29Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (F)

1. Material: In accordance with MIL-DTL-781.

2. Finish: In accordance with MIL-DTL-781.

3. Threads: Shall be in accordance with FED-STD-H28/20.

4. Swage: Shall be in accordance with specification MIL-DTL-6117.

5. Tolerance: Unless otherwise specified, tolerances: decimals ± .010, angles ± 3°.

NOTES:

1. Dimensions in inches.

2. Remove burrs and sharp edges.

3. Interpret drawing in accordance with ASME Y14.5M.

4. These terminals are not to be used with turnbuckle barrels.

5. In the event of a conflict between the text of this document and the references cited herein the text of this document takes precedence..

6. Unless otherwise specified, issues of reference documents are those in effect at the timeof solicitation..

7. Interchangeability relationship: MS21259 parts can universally replace the canceled AN666 parts identified by the same dash number; but the canceled AN666 parts cannot replace the superseding MS21259 parts. MS21259 corrosion resistant steel parts can universally replace the canceled carbon and alloy steel parts identified by the same dash number.

(F) 8. Carbon and alloy steel parts are inactive for new design.

MILITARY INTEREST (F)

Custodians
Army - AR
Navy – AS
Air Force - 99

Preparing Activity:
DLA - GS

Review activities:
Navy – MC
Air Force – 82
DLA – IS

(PROJECT: 1560-0246)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:29Z
Check the source to verify that this is the current version before use.