INCH-POUND


MS21260H
15 August 1997
MS21260G
12 March 1979

MILITARY SPECIFICATION SHEET

TERMINAL, WIRE ROPE, STUD

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-DTL-781.

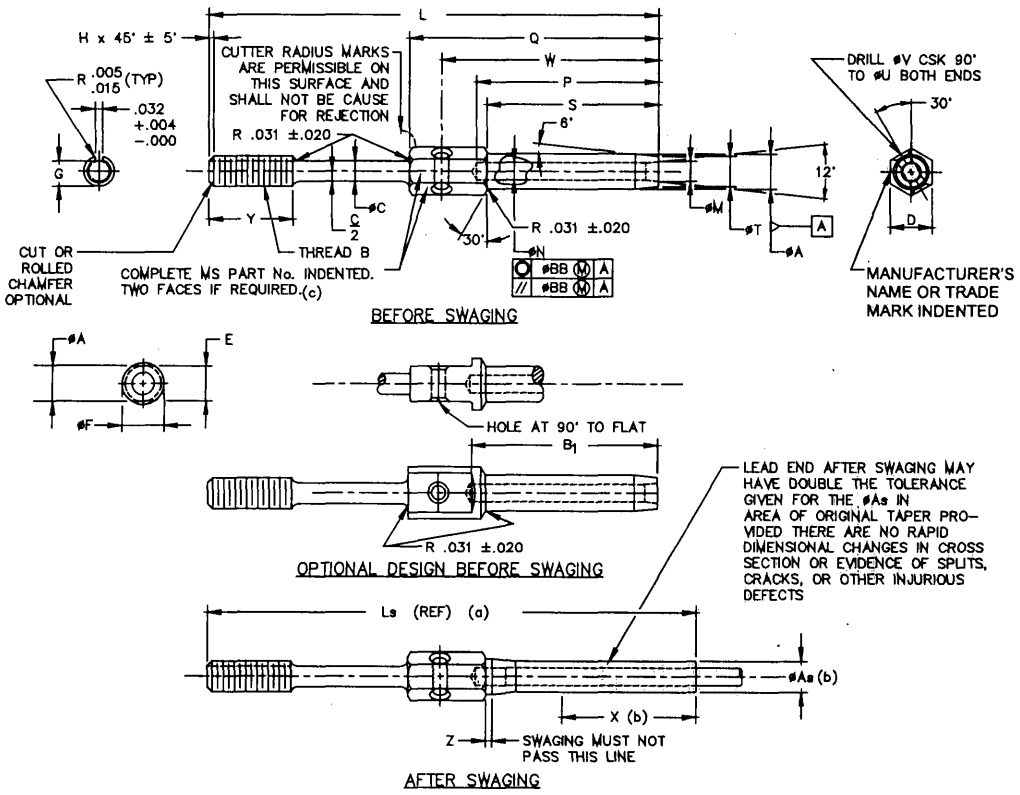

(a) Reference dimensions are for design purposes only and are not an inspection requirement.
(b) Swaged terminals shall conform to 'ØAs' for length 'X'.
(c) For terminal sizes -2 thru -5 use basic part number only, example: MS21260.

(H) Entire document revised

AMSC N/A FSC 4030

DISTRIBUTION STATEMENT A. Approved for public release; distribution is limited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:30Z
Check the source to verify that this is the current version before use.

MS PART NUMBER		NOM. CABLE	MIN. BREAKING	THREAD B UN-3A	ØA		ØAs		B_1		ØC +.006 -.000	D	E +.000 -.010	ØF +.010 -.005	G		H	
CORROSION RESISTANT STEEL RH THREAD	LH THREAD	DIA. REF	STRENGTH LB (a)	UNF-3A											MAX	MIN	MAX	MIN
MS21260L2RH	MS21260L2LH	.062	480	No. 6-40	.160		.138		1.042		.092	.188	.156	.188	.1139	.1094	.031	
MS21260S2RH	MS21260S2LH																	
MS21260L3RH	MS21260L3LH	.093	920	No. 10-32	.218		.190		1.261		.133	.250	.187	.250	.1638	.1568		
MS21260S3RH	MS21260S3LH																	
MS21260L4RH	MS21260L4LH	.125	2000	1/4-28	.250		.219	+.000 -.005	1.511		.195	.313	.250	.313	.2224	.2152	.047	.015
MS21260S4RH	MS21260S4LH																	
MS21260L5RH	MS21260L5LH	.156	2800		.297		.250		1.761									
MS21260S5RH	MS21260S5LH																	
MS21260L6RH	MS21260L6LH	.187	4200	5/16-24	.359	+.000 -.005	.313		2.011		.245	.375	.312	.375	.2830	.2754		
MS21260S6RH	MS21260S6LH																	
MS21260-7RH	MS21260-7LH	.218	5600	3/8-24	.427		.375	+.000	2.261	±.063	.306	.438	.375	.438	.3454	.3378		
MS21260-8RH	MS21260-8LH	.250	7000		.494		.438	-.007	2.511			.500	.438	.500				
MS21260-9RH	MS21260-9LH	.281	8000	7/16-20	.563		.500		2.761		.361	.625	.563	.625	.4052	.4072		
MS21260-10RH	MS21260-10LH	.312	9800	1/2-20	.635		.563	+.000	3.011		.406	.688	.625	.688	.4678	.4597		
MS21260-12RH	MS21260-12LH	.375	14400	9/16-18	.703		.625	-.008	3.511		.476	.750	.688	.750	.5285	.5201		
MS21260-14RH	MS21260-14LH	.437	17600	5/8-18	.781		.688		4.011		.538	.812	.750	.812	.5909	.5826	.063	.031
MS21260-16RH	MS21260-16LH	.500	22800	5/8-18	.844		.750	+.000	4.698			.875	.812	.875				
MS21260-18RH	MS21260-18LH	.562	28500	3/4-16	.984		.875	-.009	5.011		.654	1.000	.875	1.000	.7137	.7050		
MS21260-20RH	MS21260-20LH	.625	35000	7/8-14	1.109		1.000	+.000 -.010	5.511		.768	1.125	1.000	1.125	.8558	.8266	.078	.048
MS21260-24RH	MS21260-24LH	.750	49600	1-12	1.359		1.250	+.000	6.511		.893	1.438	1.125	1.438	.9608	.9516		
MS21260-28RH	MS21260-28LH	.875	66500	1 1/8-12	1.593	+.000	1.437	-.012	7.166		1.002	1.625	1.438	1.625	1.0819	1.0772	.094	.062
MS21260-32RH	MS21260-32LH	1.000	85400	1 1/4-12	1.812	-.010	1.625		8.229		1.128	1.875	1.625	1.812	1.2069	1.1972		

DASH NUMBER (SIZE)	L +/- .063	Ls REF	ØM		ØN		P		Q +.031 -.016	S +.062 -.000	ØT		ØU	Øv +.005 -.000	W +/- .016	X MIN	Y +/- .047	Z MIN	ØBB
L2	3.491	3.67	.090		.078		1.042		1.319	.969	.138		.094	.063	1.174	.70	.375		
S2	2.616	2.79																	
L3	3.738	3.86	.119		.109		1.261		1.581	1.188	.190				1.411	.80	.500		
S3	2.863	2.98										+.000							
L4	4.020	4.28	.154		.141		1.511		1.863	1.438	.219	-.005			1.682	1.05	.563		
S4	3.145	3.40		+.010		+.005		+.031											
L5	4.314	4.66	.188	-.000	.172	-.000	1.761	-.000	2.157	1.688	.250				1.958	1.29	.625		.008 (.016 FIM)
S5	3.439	3.78																	
L6	4.612	4.78	.223		.203		2.011		2.257	1.938	.313				2.237	1.31	.750	.03	
S6	3.737	3.90												.098					
-7	4.914	5.21	.257		.234		2.261		2.757	2.188	.375	+.000	.125		2.518	1.55	.875		
-8	5.218	5.52	.291		.265		2.511		3.061	2.438	.438	-.007			2.784	1.70			
-9	5.542	5.90	.326		.297		2.761		3.385	2.688	.500				3.076	1.89	1.000		
-10	5.875	6.30	.360		.328		3.011		3.718	2.938	.563	+.000			3.326	2.06			
-12	6.608	7.01	.430		.390	+.008	3.511		4.281	3.438	.625	-.008			3.828	3.12	1.125		
-14	7.468	7.94	.514		.468	-.000	4.011	+.047	4.812	3.938	.688				4.375	3.57	1.250		.010 (.020 FIM)
-16	8.718	9.28	.584	+.012	.531	+.009	4.698	-.000	5.562	4.625	.750	+.000			5.093	4.31			
-18	9.188	9.78	.653	-.000	.594	-.000	5.011		6.000	4.938	.875	-.009			5.468	4.51	1.500		
-20	10.469	11.16	.722		.656	+.010 -.000	5.511		6.750	5.438	1.000	+.000 -.010	.188	.125	6.093	5.04	1.750		.015 (.030 FIM)
-24	12.188	12.76	.860	+.015	.781	+.012	6.511	+.062	7.938	6.438	1.250	+.000			7.188	5.80	2.000		
-28	12.851	13.61	1.013	-.000	.921	-.000	7.166	-.000	8.601	7.094	1.437	-.012			7.846	6.31			.020 (.040 FIM)
-32	14.624	15.53	1.151		1.046		8.229		9.844	8.156	1.625				9.000	7.26	2.250		

(a) To achieve the minimum breaking strength, for the terminal test only, a galvanized carbon steel wire rope shall be used.

Source: https://assist.dla.mil -- Downloaded: 2026-02-23T14:30Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: Steel, corrosion resistant, steel 303Se (UNS S30323 or S30300) or 304 (UNS S30400).

2. Finish: Finish in accordance with MIL-DTL-781.

3. Threads: Threads in accordance with FED-STD-H28/20.

4. Swage in accordance with specification MIL-DTL-6117

5. Tolerance: Unless otherwise specified, tolerances: decimals ± .010, angles ± 3°.

NOTES:

1. Dimension in inches.

2. Remove all burrs and sharp edges

3. Interpret drawing in accordance with ASME Y14.5M.

4. In the event of a conflict between the text of this document and the references cited herein the text of this document takes precedence.

5. Unless otherwise specified, issues of referenced documents are those in effect at the time of solicitation.

6. Interchangeability relationship: MS21260 parts can universally replace the canceled AN669 and NAS650 parts identified by the same dash number; but the canceled AN669 and NAS650 parts cannot replace the superseding MS21260 parts. MS21260 corrosion resistant steel parts can universally replace the canceled carbon and alloy steel parts identified by the same dash number.

MILITARY INTEREST

Custodians:
Army - AR
Navy - AS
Air Force - 99

Review activities:
Army - ME
Navy - MC

Preparing Activity:
DLA-IS

(Project 4030-0278)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:30Z
Check the source to verify that this is the current version before use.