This military standard is approved for use by Engineering and Technical Support Division, AFLC/LOIE, Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.


Reviewer activities: AF - 11, 17, 99
DLA - ES

DD FORM 1426 672 (LIMITED COORDINATION)

Procurement Specification	MIL-C-26500
P.A.	AIR FORCE-85
Other Cust	
International Interest	
Superseded	
TITLE	CONNECTORS, PLUG, ELECTRICAL STRAIGHT, MINIATURE
	MILITARY STANDARD
	MS24266(USAF)
	PAGE 1 OF 7

5935-A063-8

Ⓚ DENOTES CHANGE

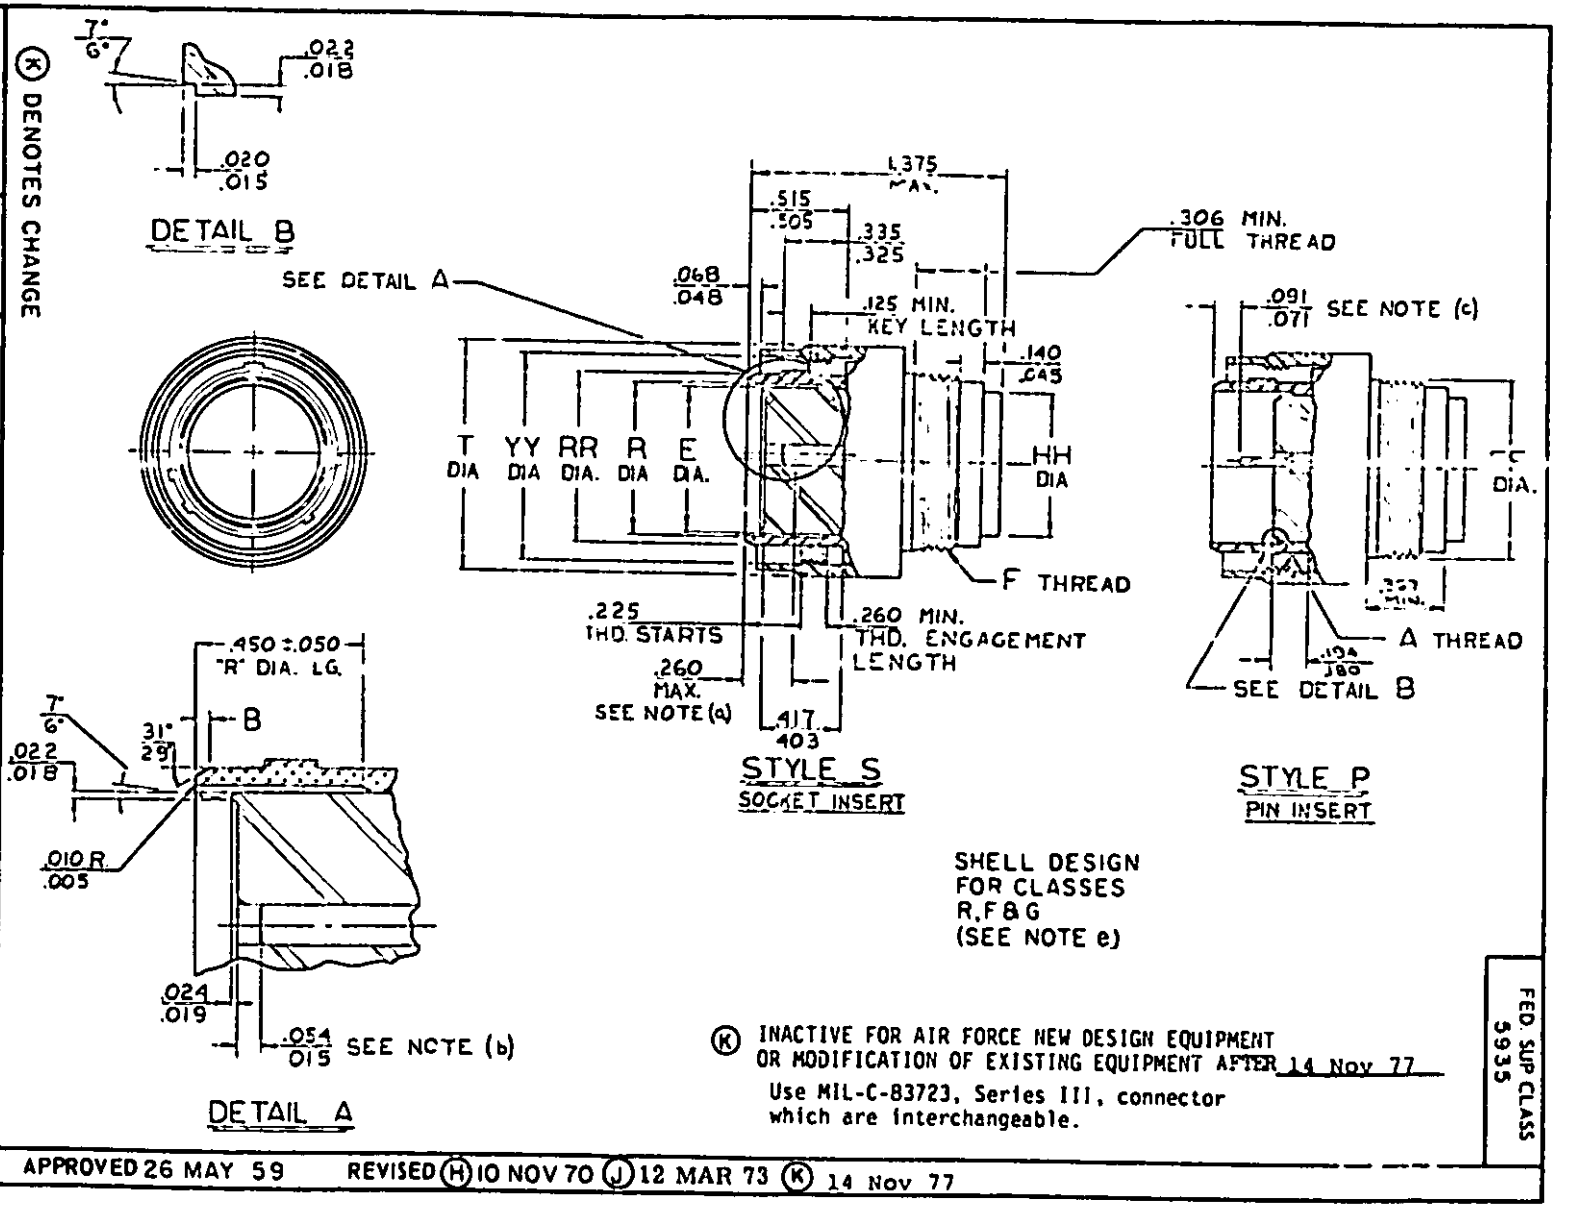

Ⓚ INACTIVE FOR AIR FORCE NEW DESIGN EQUIPMENT OR MODIFICATION OF EXISTING EQUIPMENT AFTER 14 Nov 77

Use MIL-C-83723, Series III, connector which are interchangeable.

FED. SUP CLASS 5935

APPROVED 26 MAY 59 REVISED Ⓗ 10 NOV 70 Ⓙ 12 MAR 73 Ⓚ 14 Nov 77


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by Engineering and Technical Support Division, AFLC/LOIE, Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

Reviewer activities: AF - 11, 17, 99
OLA - ES

DD FORM 1 SEP 63 672 (LIMITED COORDINATION)

Procurement Specification MIL-C-26500	International Interest	P.A. AIR FORCE-85 Other Cust
SUPERSEDES:	TITLE CONNECTORS, PLUG, ELECTRICAL STRAIGHT; MINIATURE	MILITARY STANDARD MS24266(USAF)
PAGE 2 OF 7		FED. SUP CLASS 5935

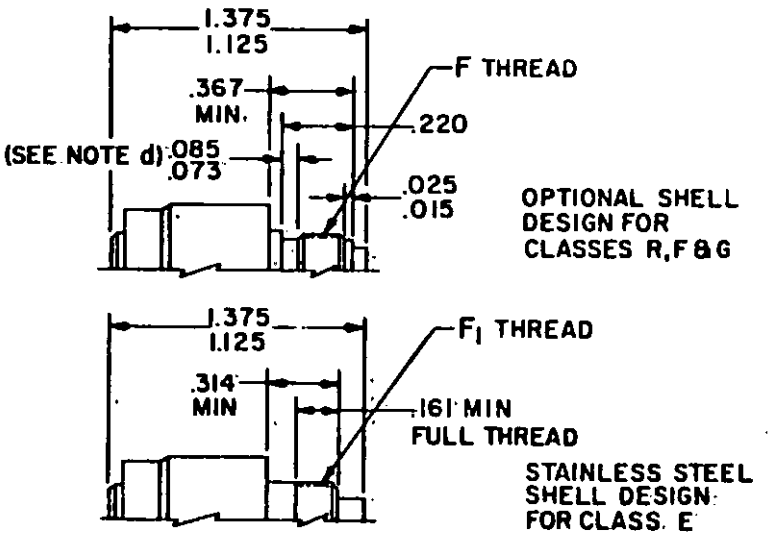

(SEE NOTE e)

APPROVED 26 MAY 1959 REVISED (K) FOR CHANGES SEE PAGE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by Engineering and Technical Support Division, AFLC/LOIE, Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

Reviewer activities: AF - 11, 17, 99
DLA - ES

DD FORM 1 SEP 83 672 (LIMITED COORDINATION)

P.A. AIR FORCE-85 Other Cust

Procurement Specification MIL-C-26500


International Interest:

SUPERSEDES:

TITLE CONNECTORS, PLUG, ELECTRICAL STRAIGHT, MINIATURE

MILITARY STANDARD MS24266(USAF)

PAGE 3 OF 7

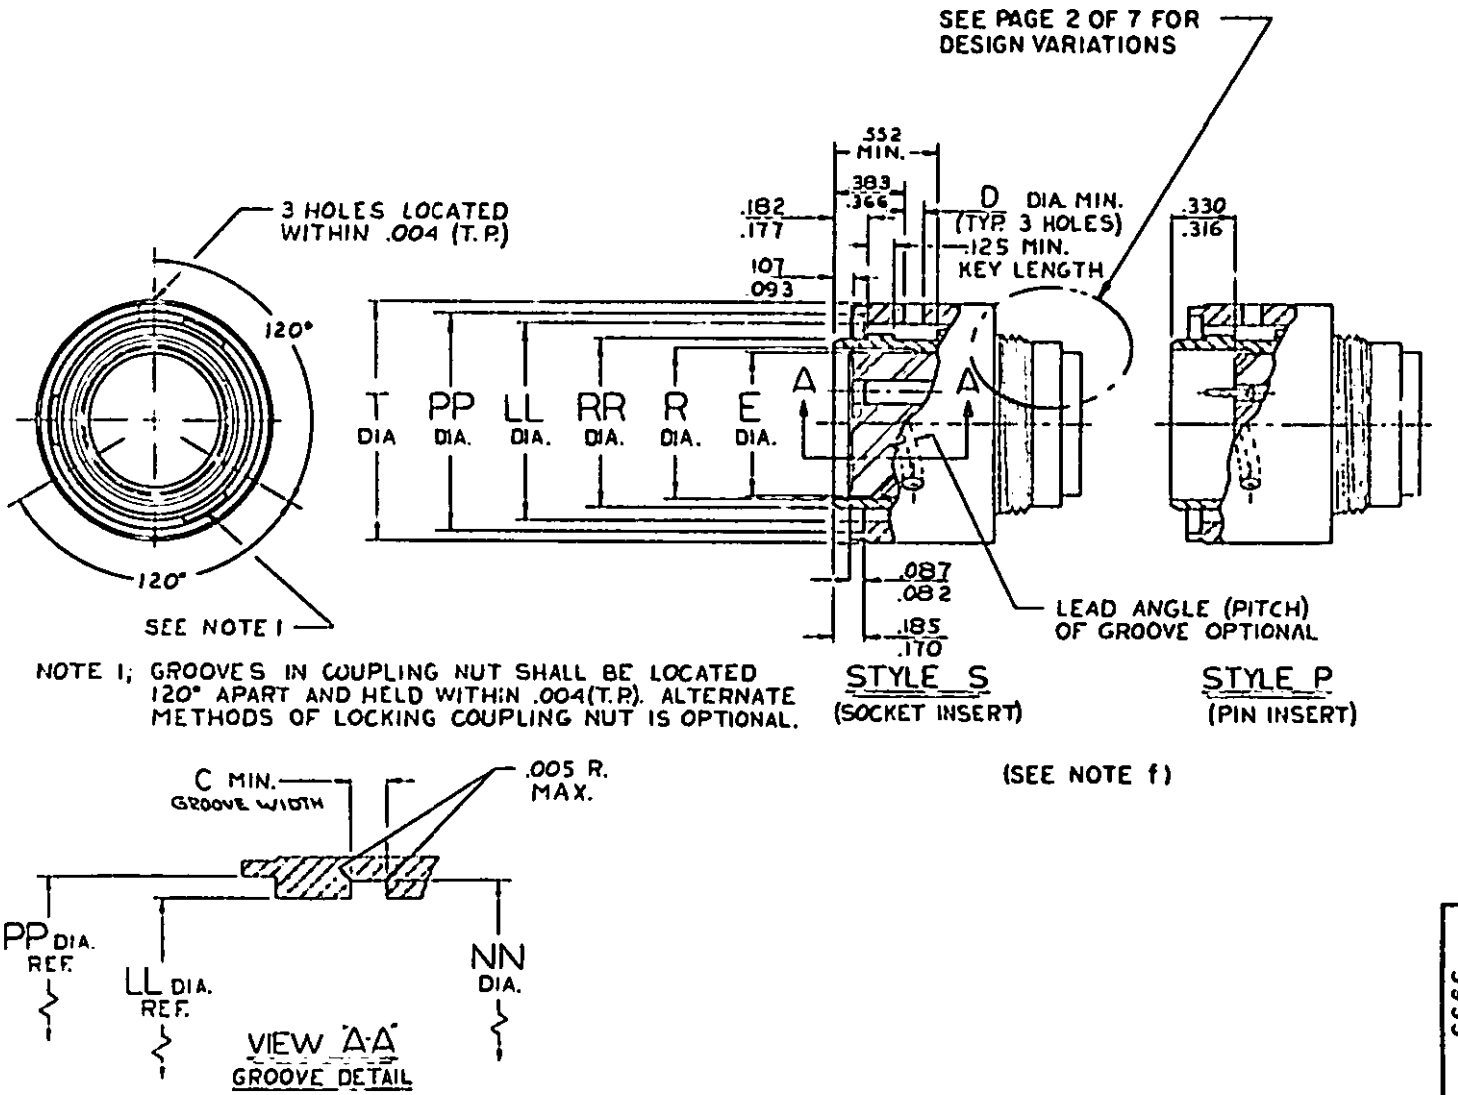

NOTE 1; GROOVES IN COUPLING NUT SHALL BE LOCATED 120° APART AND HELD WITHIN .004(T.P). ALTERNATE METHODS OF LOCKING COUPLING NUT IS OPTIONAL.

FED. SUP CLASS 5935

APPROVED 26 MAY 1959 REVISED (K) FOR CHANGES SEE PAGE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by Engineering and Technical Support Division, AFLC/LOIE, Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

Reviewer activities: AF - 11, 17, 99
DLA - ES

DD FORM 1 SEP 63 672 (LIMITED COORDINATION)

P.A.: AIR FORCE-85 Other Cust

Procurement Specification: MIL-C-26500

International Interest:


SUPERSEDES:

TITLE: CONNECTORS, PLUG, ELECTRICAL STRAIGHT, MINIATURE

MILITARY STANDARD

MS24266(USAF)

PAGE 4 OF 7

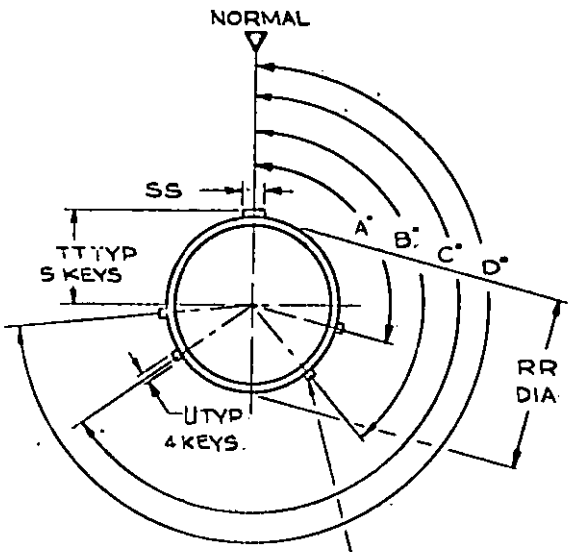

4 KEYS (MMC) LOCATED WITHIN .004 EITHER SIDE OF (TP) RELATIVE TO NORMAL KEY (MMC) AND RR DIA

FACE OF PLUG SHELL

SHELL SIZE	TT +.000 -.003	RR +.000 -.005	SS ±.003 KEY WIDTH	U ±.003 KEY WIDTH
8	.234	.424	.084	.042
10	.285	.526	.084	.052
12	.370	.696	.084	.052
14	.405	.765	.084	.052
16	.468	.892	.115	.052
18	.521	.998	.115	.052
20	.583	1.123	.115	.052
22	.646	1.248	.115	.052
24	.708	1.373	.115	.052

ALTERNATE SHELL KEY POSITIONS FOR PLUG CONNECTORS.

POSITION	SIZE 8				SIZE 10				SIZES 12,14,16,18,20,22 & 24			
	A°	B°	C°	D°	A°	B°	C°	D°	A°	B°	C°	D°
NORMAL	105	140	215	265	105	140	215	265	105	140	215	265
6	102	132	248	320	102	132	248	320	18	149	192	259
7	80	118	230	312	80	118	230	312	92	152	222	342
8	35	140	205	275	35	140	203	275	84	152	204	334
9	64	155	234	304	64	155	234	304	24	135	199	240
10					25	115	220	270	98	152	268	338

APPROVED 26 MAY 1959 REVISED (K) FOR CHANGES SEE PAGE 1

FED. SUP CLASS 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by Engineering and Technical Support Division, AFLC/LOIE, Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

Reviewer activities: AF - 11, 17, 99
DLA - ES

DD FORM 1426 672 (LIMITED COORDINATION)

P.A. AIR FORCE-85 Other Cust

Procurement Specification MIL-C-26500

International Interest

SUPERSEDES:

TITLE CONNECTORS, PLUG, ELECTRICAL STRAIGHT, MINIATURE

MILITARY STANDARD MS24266(USAF)

PAGE 5 OF 7

SHELL SIZE	A UNEF-2B COUPLING THREAD	E MAX. INSERT DIA.	F UNEF-2A ACCESS. THREAD	FF MAX. DIA.	HH MAX. GROMMET DIA.	LL DIA +.005 -.000	NN MIN. DIA.	PP MIN. DIA.	R MIN. DIA	T MAX.O.D. COUPLING NUT	YY MIN. DIA.	FOR INSERT ARRANGEMENT SEE DWG.
8	9/16-24	.312	7/16-28	.437	.328	.539	.632	.632	.352	.776	.583	MS27561
10	11/16-24	.388	9/16-24	.562	.420	.662	.760	.760	.428	.906	.707	MS24230
12	7/8-20	.558	3/4-20	.750	.580	.832	.930	.930	.598	1.078	.895	MS24260
14	15/16-20	.627	13/16-20	.812	.664	.901	.999	.999	.667	1.141	.957	MS24260
16	1 1/16-18	.754	15/16-20	.938	.769	1.028	1.126	1.126	.794	1.266	1.084	MS24261
18	1 3/16-18	.860	1 1/16-18	1.062	.902	1.134	1.232	1.232	.900	1.375	1.209	MS24262
20	1 5/16-18	.985	1 3/16-18	1.182	1.033	1.261	1.357	1.357	1.025	1.510	1.334	MS27561
22	1 7/16-18	1.110	1 5/16-18	1.312	1.152	1.384	1.482	1.482	1.150	1.625	1.459	MS24263
24	1 9/16-18	1.235	1 7/16-18	1.432	1.282	1.511	1.607	1.607	1.275	1.760	1.584	MS27561

SHELL SIZE	B	C MIN.	D MIN. DIA.
8	.025	.079	079
10	.031	.094	094
12	.031	.094	.094
14	.031	.094	.094
16	.031	.094	.094
18	.031	.094	.094
20	.031	.094	.094
22	.031	.094	.094
24	.031	.094	.094

SHELL SIZE	F_1 Thread -36NS-2A	F_1 Pitch Diameter
8	.4340	.4151/ .4114
10	.5634	.5454/ .5415
12	.7334	.7154/ .7115
14	.8032	.7841/ .7806
16	.9302	.9110/ .9074
18	1.0362	1.0171/1.0134
20	1.1611	1.1431/1.1385
22	1.2862	1.2670/1.2633
24	1.4111	1.3931/1.3885

FED. SUP CLASS 5935

APPROVED 26 MAY 1959 REVISED (K) FOR CHANGES SEE PAGE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.

WEIGHT CHART

MAXIMUM CONNECTOR WEIGHT IN LBS.

PIN INSERT			SOCKET INSERT		
MS PART NUMBER	LESS CONTACTS	WITH CONTACTS	MS PART NUMBER	LESS CONTACTS	WITH CONTACTS
M524266R 8T2PN	.028	.030	M524266R 8T2SN	.028	.031
10T2PN	.040	.042	10T2SN	.041	.043
10T5PN	.039	.043	10T5SN	.040	.044
10T20PN	.040	.044	10T20SN	.041	.045
12T3PN	.055	.060	12T3SN	.057	.062
12T12PN	.053	.063	12T12SN	.054	.064
14T3PN	.059	.063	14T3SN	.061	.070
14T4PN	.059	.074	14T4SN	.061	.076
14T7PN	.059	.072	14T7SN	.061	.072
14T12PN	.059	.072	14T12SN	.061	.074
14T15PN	.059	.073	14T15SN	.061	.074
16T10PN	.072	.090	16T10SN	.071	.089
16T24PN	.071	.091	16T24SN	.074	.094
18T8PN	.081	.110	18T8SN	.084	.112
18T11PN	.078	.102	18T11SN	.082	.105
18T14PN	.078	.103	18T14SN	.082	.107
18T21PN	.078	.104	18T21SN	.082	.107
20T16PN	.038	.126	20T16SN	.101	.129
20T25PN	.095	.133	20T25SN	.099	.136
20T28PN	.097	.132	20T26SN	.099	.133
20T39PN	.097	.132	20T39SN	.099	.133
20T41PN	.097	.131	20T41SN	.099	.133
22T12PN	.110	.153	22T12SN	.117	.156
22T19PN	.110	.154	22T19SN	.117	.150
22T32PN	.110	.153	22T32SN	.117	.160
22T55PN	.106	.153	22T55SN	.112	.157
24T23PN	.129	.184	24T23SN	.134	.188
24T57PN	.128	.181	24T57SN	.133	.185
M524266R 24T61PN	.125	.176	M524266R 24T61SN	.131	.181

THREADED CONNECTORS CLASSES F G & R

APPROVED 26 MAY 1959 REVISED (K) FOR CHANGES SEE PAGE 1

This military standard is approved for use by Engineering and Technical Support Division, AFLC/LOIE, Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

Reviewer activities: AF - 11, 17, 99
DLA - ES

P.A.	International Interest	TITLE	MILITARY STANDARD
AIR FORCE-85 Other Cust		CONNECTORS, PLUG, ELECTRICAL STRAIGHT, MINIATURE	MS24266(USAF)
Procurement Specification MIL-C-26500		SUPERSEDES:	PAGE 6 OF 7

DD FORM 1 SEP 63 672 (LIMITED COORDINATION)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.

ALL DIAMETERS TO BE CONCENTRIC WITH EACH OTHER WITHIN .015 T.I.R.
ALL DIAMETERS IN THE SAME PLANE TO BE CONCENTRIC WITH EACH OTHER WITHIN .004 T.I.R.
CONTACTS TO BE IN ACCORDANCE WITH SPEC. MIL-C-26636.
TRUE POSITION (T.P.) TOLERANCE SPECIFIED ARE FOR MAXIMUM MATERIAL CONDITIONS (M.M.C.)

(a.) DISTANCE BETWEEN END OF SHELL AND THE POINT AT WHICH A GAGE PIN, HAVING THE SAME BASIC DIAMETER AS THE MATING CONTACT AND A SQUARE FACE, ENGAGES SOCKET CONTACT SPRING.

(b.) DIMENSIONS ON PIN AND SOCKET CONTACT LOCATIONS AND INSERT FACES APPLY WHEN CONTACTS ARE PLACED IN INSERTS FOR INSPECTION OR APPLICATION.


(C) .071 MAY REDUCE TO .056 MIN. UNDER PRESSURES CAUSED BY MOLDED CABLE ASSEMBLIES OR SHARP CABLE BENDS.

FOR ACCESSORIES USED WITH THIS CONNECTOR SEE PARAGRAPH 3.4.7 OF PROCUREMENT SPECIFICATION.
DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED TOLERANCES - DECIMALS - ±.005
REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
USE TOOL MS24256A TO ASSEMBLE CONTACTS INTO THIS CONNECTOR
USE TOOL MS24256R TO REMOVE CONTACTS FROM THIS CONNECTOR

(d) THREAD RELIEF GROOVE IS OPTIONAL ON SHELL. WHEN GROOVE IS OMITTED, THE LENGTH OF FULL THREAD FROM REAR OF SHELL WILL BE .221 MINIMUM

(e) ENVIRONMENT RESISTANT (CLASS F & R) PLUGS, TYPE "T"-ALUMINUM SHELL MATERIAL. GROUNDING ENVIRONMENT RESISTANT (CLASS G) PLUGS, TYPE "T"-ALUMINUM SHELL MATERIAL. GROUNDING ENVIRONMENT RESISTANT (CLASS G & E) PLUGS, TYPE "T"-STAINLESS STEEL MAT'L

(f) ENVIRONMENT RESISTANT (CLASS F & R) PLUGS. TYPE "B"-ALUMINUM SHELL MATERIAL. GROUNDING ENVIRONMENT RESISTANT (CLASS G) PLUGS, TYPE "B"-ALUMINUM SHELL MAT'L. GROUNDING ENVIRONMENT RESISTANT (CLASS G & E) PLUGS, TYPE "B"-STAINLESS STEEL SHELL MAT'L.

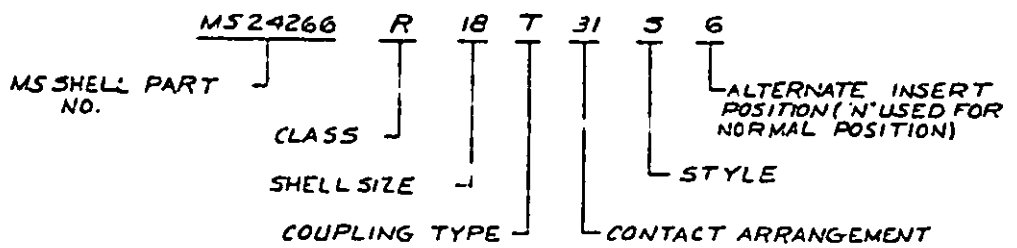

PART NUMBER EXAMPLE

APPROVED 26 MAY 1959 REVISED (X) FOR CHANGES SEE PAGE 1

Reviewer activities: AF - 11, 17, 99
DLA - ES

This military standard is approved for use by Engineering and Technical Support Division, AFLC/LOIE, Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

P.A. AIR FORCE - 85 Other Cust	International Interest	TITLE CONNECTORS, PLUG, ELECTRICAL STRAIGHT, MINIATURE	MILITARY STANDARD MS24266(USAF)
Procurement Specification MIL-C-26500		SUPERSEDES:	PAGE 7 OF 7

DD FORM 1 SEP 83 672 (LIMITED COORDINATION)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.