FED. SUP CLASS
5925

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications for repetitive use shall be made from this document when applicable.

Review activities: Army - Navy - Air Force - 99

User activities: Army - Navy - Air Force -

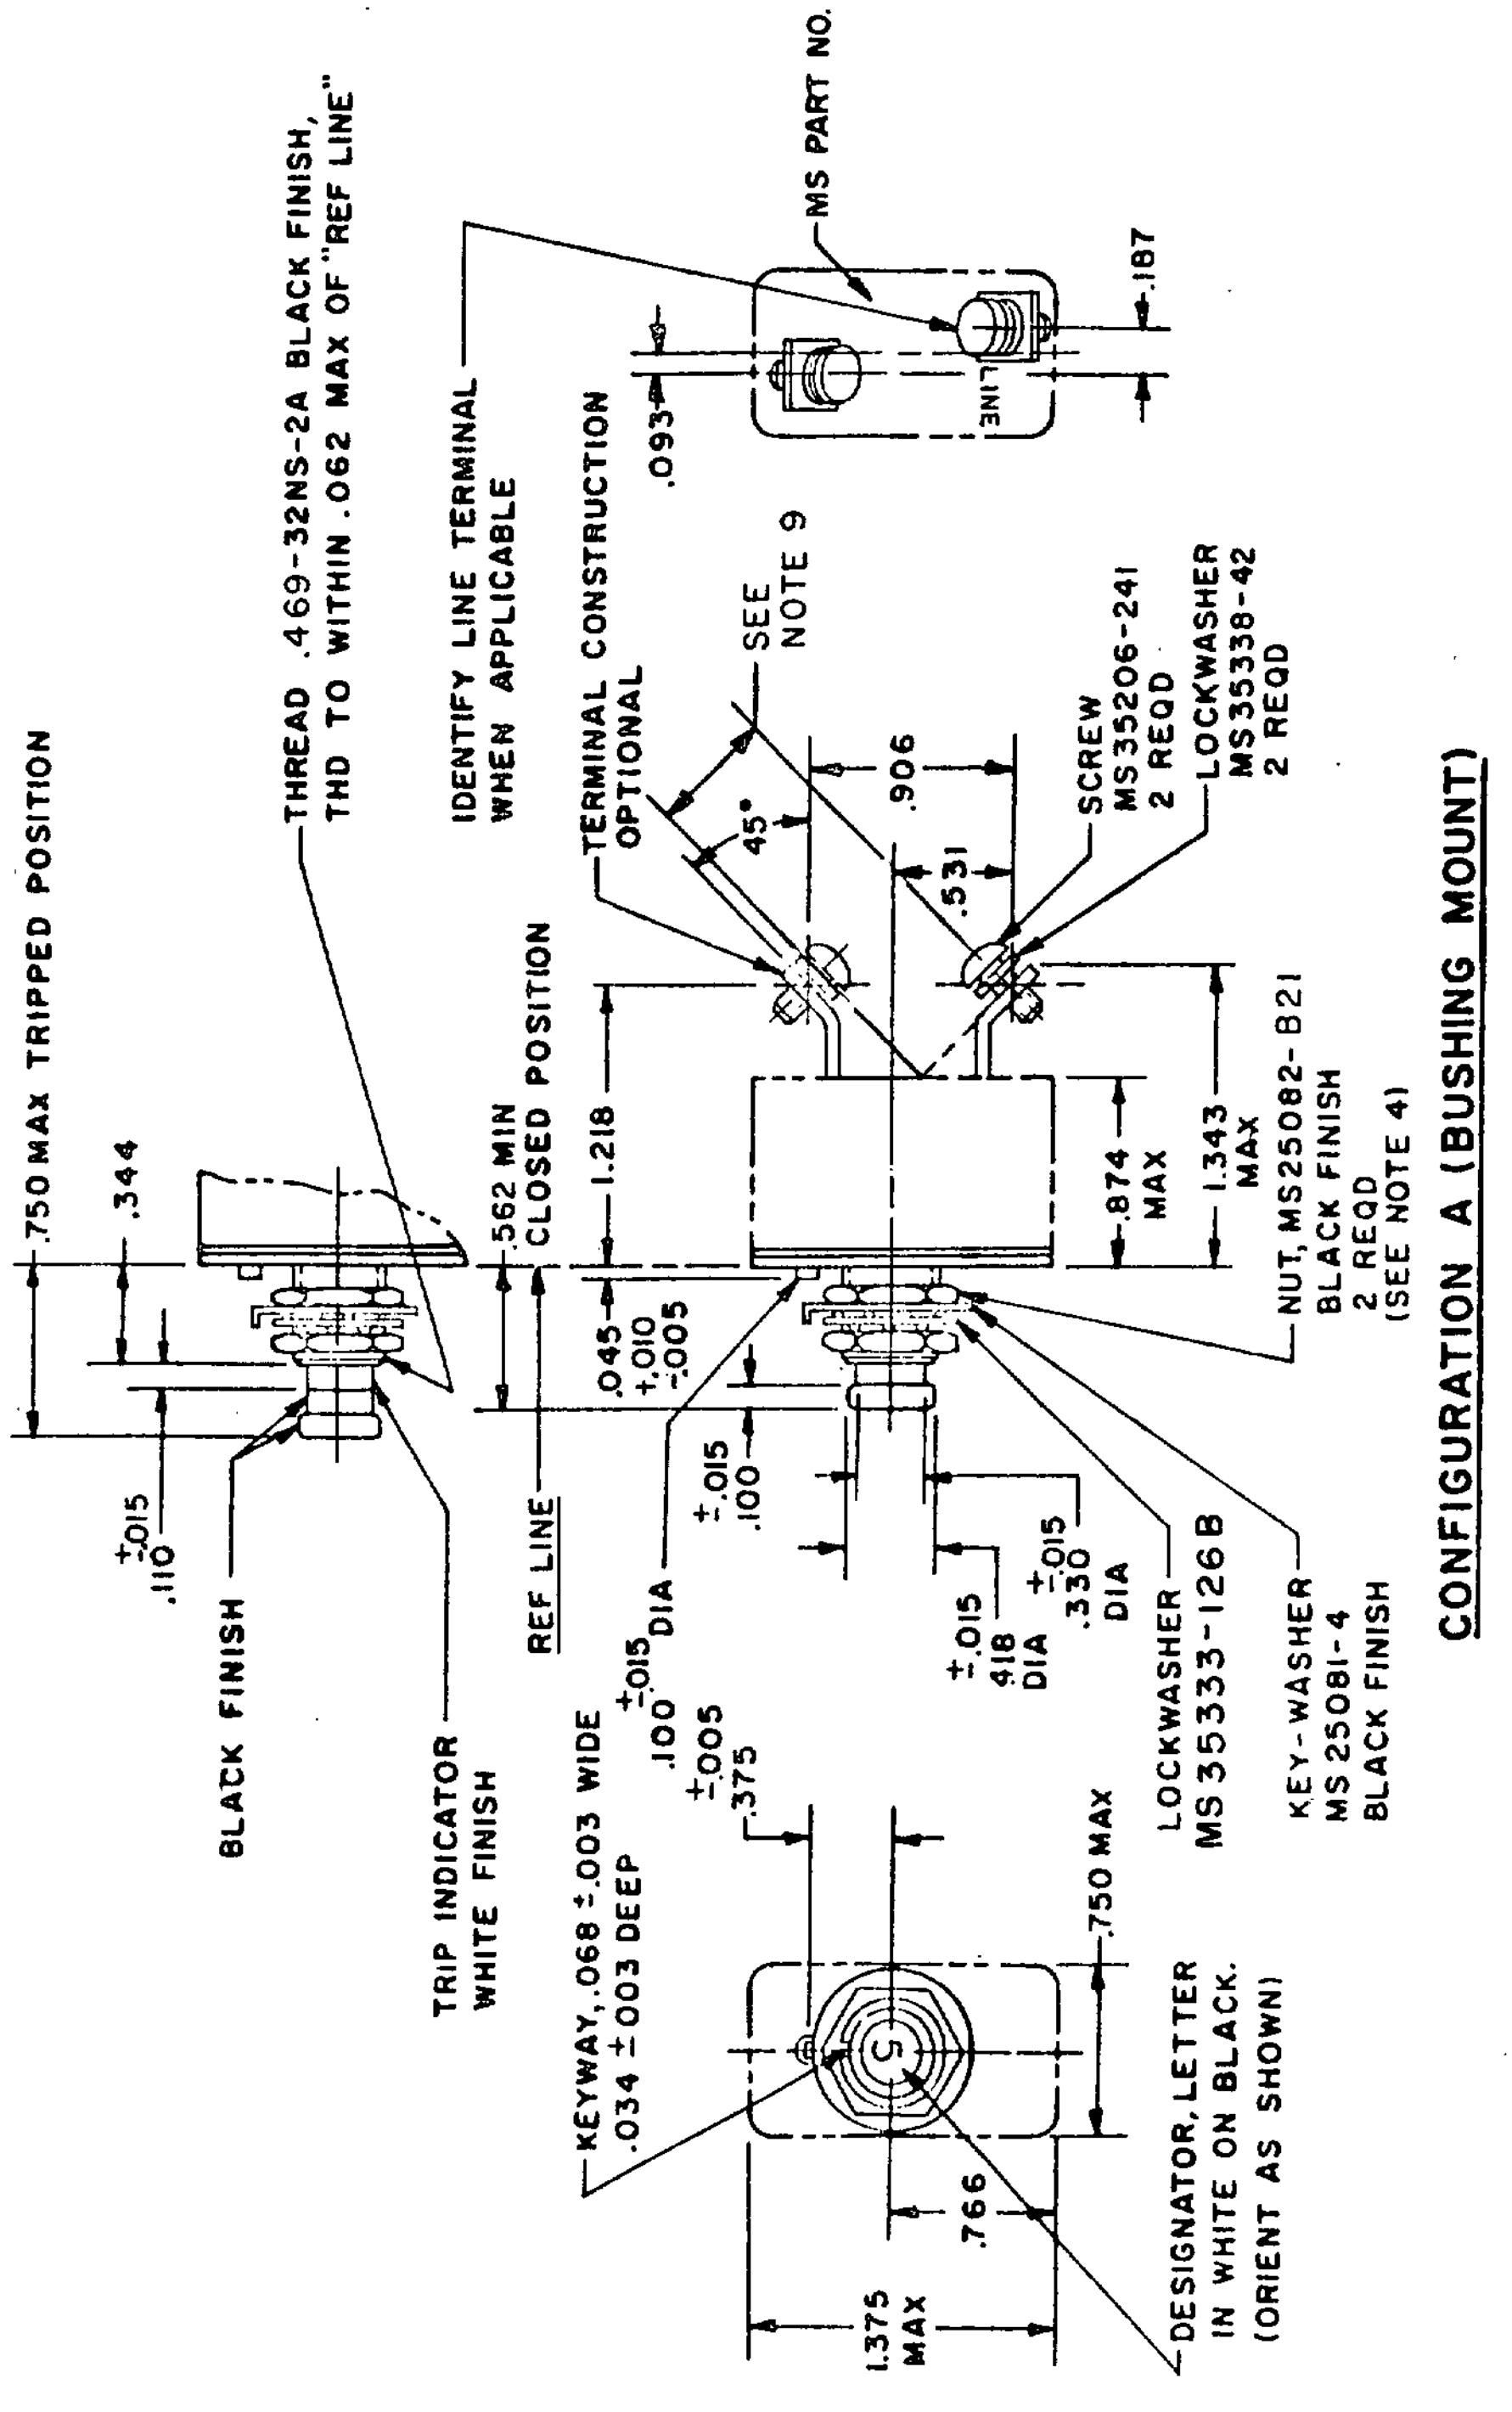

.750 MAX TRIPPED POSITION
.344
+.015
.110
-
BLACK FINISH
THREAD .469-32NS-2A BLACK FINISH, THD TO WITHIN .062 MAX OF "REF LINE"
TRIP INDICATOR WHITE FINISH
IDENTIFY LINE TERMINAL WHEN APPLICABLE
.562 MIN CLOSED POSITION
REF LINE
1.218
.045 +.010 -.005
+.015 -.100
TERMINAL CONSTRUCTION OPTIONAL
SEE NOTE 9
45°
.906
.531
MS PART NO.
.093
.187
LINE
SCREW MS35206-241 2 REQD
LOCKWASHER MS35338-42 2 REQD
.874 MAX
1.343 MAX
NUT, MS25082-B21 BLACK FINISH 2 REQD (SEE NOTE 4)
+.015 -.330 DIA
+.015 -.418 DIA
.100 +.015 - DIA
.375 +.005 -
LOCKWASHER MS35333-126B
KEY-WASHER MS25081-4 BLACK FINISH
KEYWAY, .068 ±.003 WIDE .034 ±.003 DEEP
.750 MAX
.766
1.375 MAX
DESIGNATOR, LETTER IN WHITE ON BLACK. (ORIENT AS SHOWN)
C
CONFIGURATION A (BUSHING MOUNT)

Ⓙ DENOTES CHANGES

APPROVED 22 APR 1959 REVISED Ⓕ 17 AUG 1975 Ⓖ 29 NOV 1976 Ⓗ 2 May 1978 Ⓘ 12 APR 84 Ⓙ 12 JUN 86

P.A AF - 85 Other Cust NAVY - AS ARMY - ER	International interest SEE NOTE 6	TITLE Ⓙ CIRCUIT BREAKER, TRIP-FREE, RECYCLING, PUSH-PULL, 3 THROUGH 35 AMPERES, TYPE I	MILITARY STANDARD MS24510
Procurement Specification MIL-C-5809		SUPERSEDES:	PAGE 1 OF 5

AMSC N/A

5925-0168

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications for repetitive use shall be made from this document when applicable.

Review activities: Army -
Navy -
Air Force - 99

User activities: Army -
Navy -
Air Force -

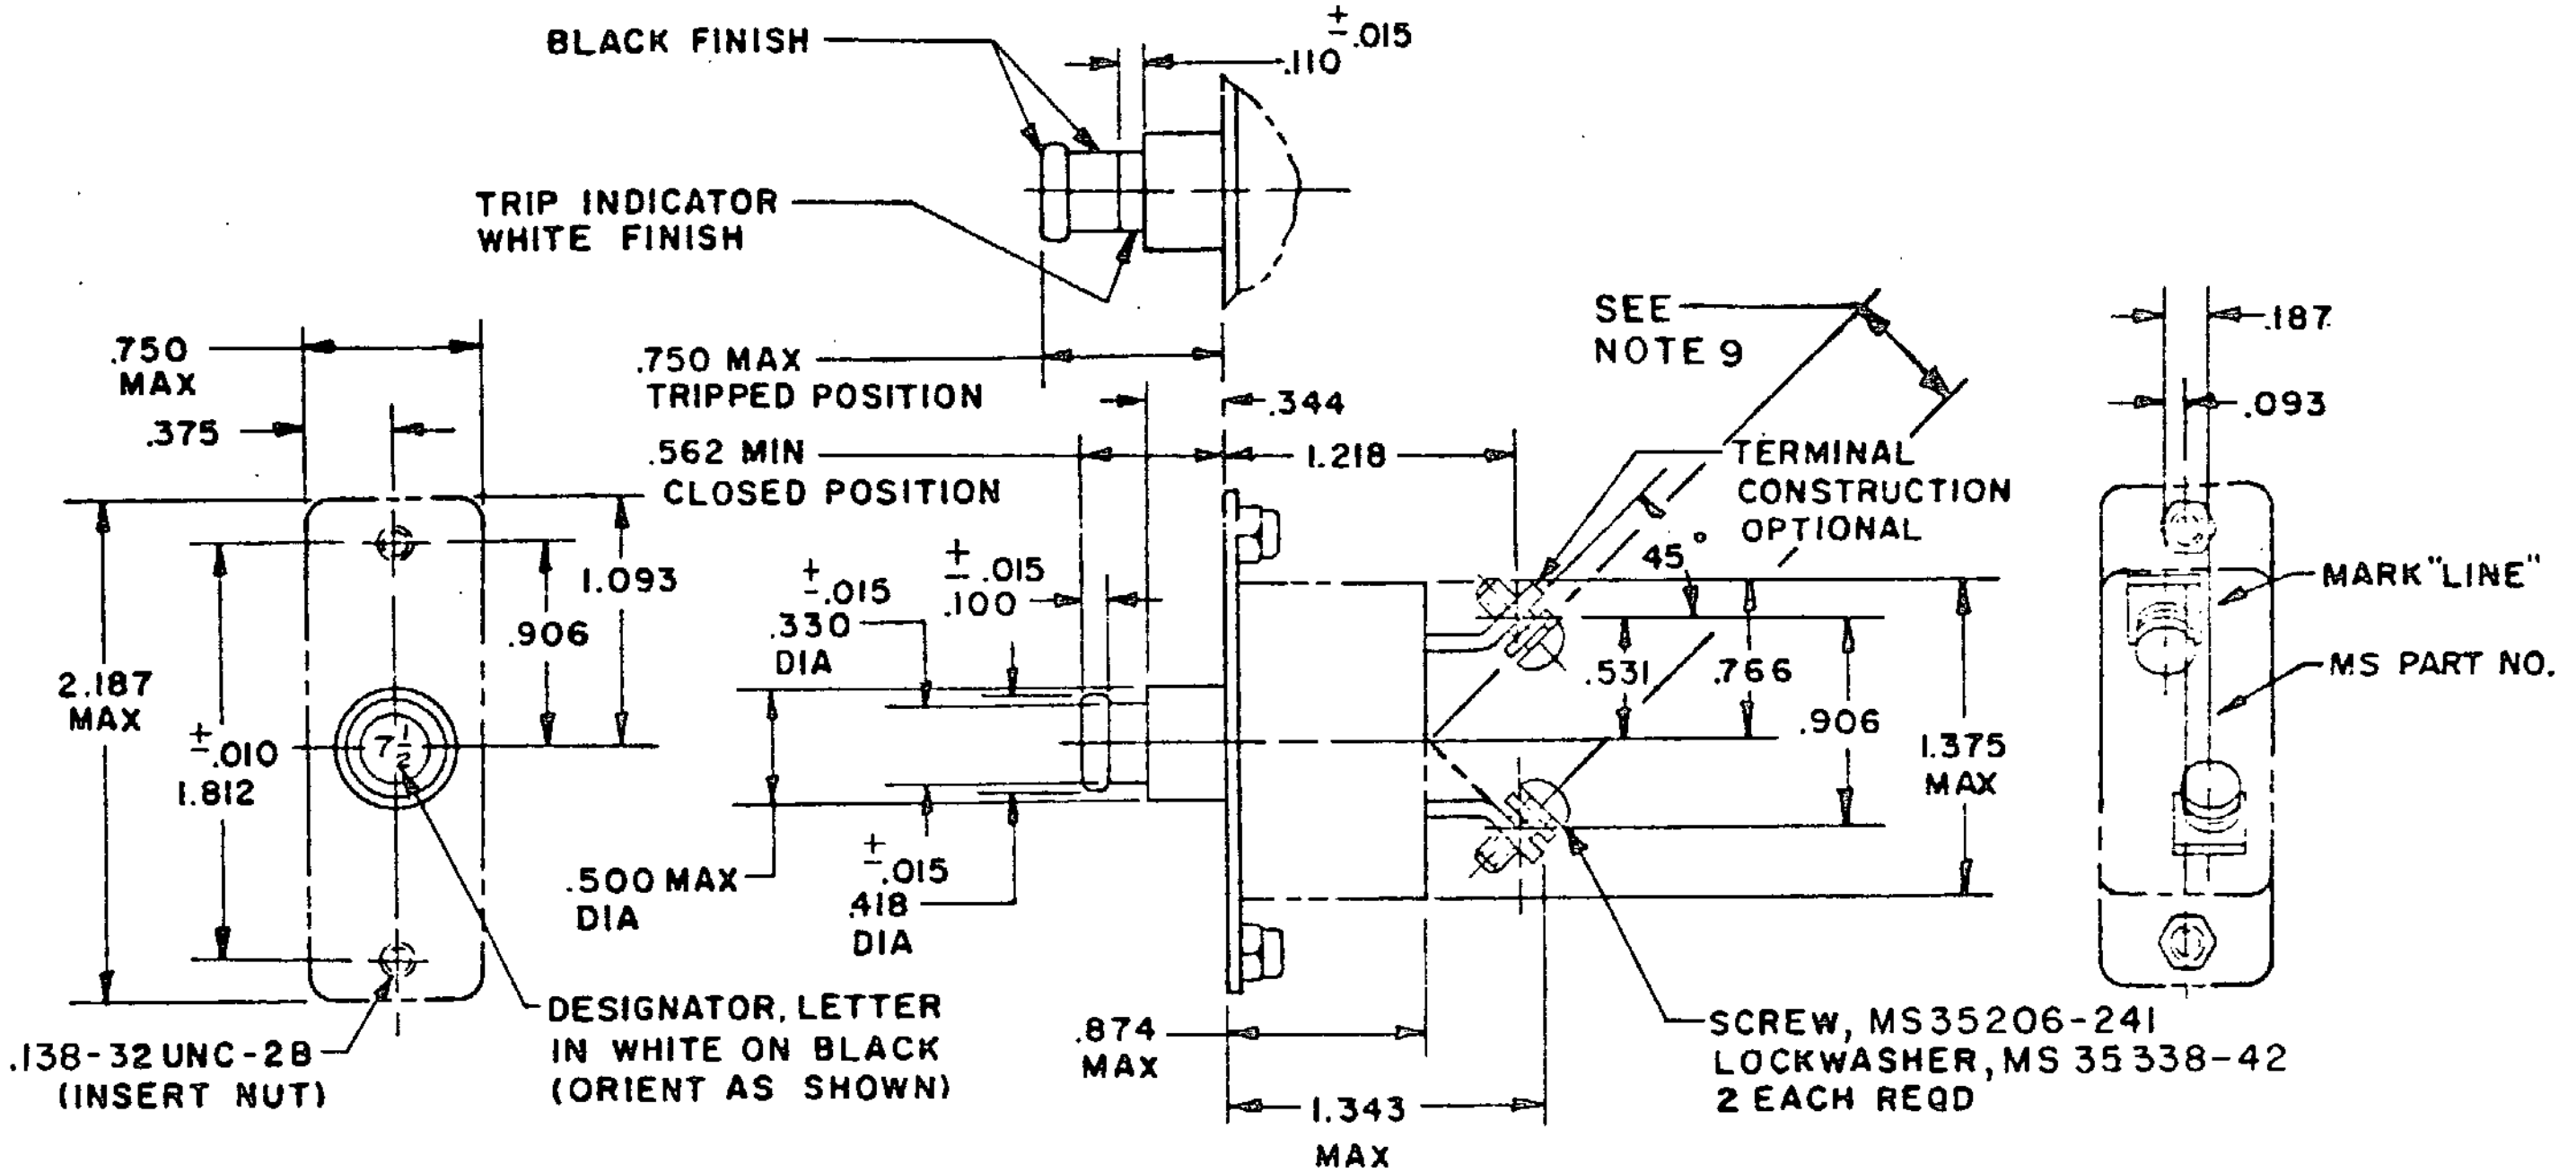
BLACK FINISH
+.015 -.110
TRIP INDICATOR WHITE FINISH
.750 MAX
.375
.750 MAX TRIPPED POSITION
.562 MIN CLOSED POSITION
.344
1.218
SEE NOTE 9
TERMINAL CONSTRUCTION OPTIONAL
45°
.187
.093
MARK "LINE"
MS PART NO.
1.093
.906
2.187 MAX
±.010 1.812
7½
±.015 .330 DIA
±.015 .100
.531
.766
.906
1.375 MAX
.500 MAX DIA
±.015 .418 DIA
.138-32 UNC-2B (INSERT NUT)
DESIGNATOR, LETTER IN WHITE ON BLACK (ORIENT AS SHOWN)
.874 MAX
1.343 MAX
SCREW, MS35206-241
LOCKWASHER, MS 35338-42
2 EACH REQD

CONFIGURATION B (COVER PLATE MOUNT)

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.031 (.79 mm) for decimals and ±2° for angles.
3. Phantom lines indicate that contour is optional provided maximum dimensions are not exceeded.
4. Trip-free requirements per 6.4.6.1 of MIL-C-5809.
5. Mounting nut torque: 65 pound-inches maximum.
6. Certain provisions of this standard are subject of international agreement ASCC 12/3. When revision or cancellation of this standard is proposed, the departmental custodians will inform their respective departmental standardization office so that appropriate action may be taken respecting the international agreement concerned.
7. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
8. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of thi standard to the extent specified herein.
9. .425 minimum typical clearance from center line of screw to case.

FED. SUP CLASS
5925

APPROVED 22 APR 1959 REVISED Ⓙ For changes see pages 1,2,3,4 & 5

P.A AF - 85

Other Cust
NAVY - AS
ARMY - ER

International interest
SEE NOTE 6

TITLE
Ⓙ CIRCUIT BREAKER, TRIP-FREE, RECYCLING, PUSH-PULL, 3 THROUGH 35 AMPERES, TYPE I

MILITARY STANDARD
MS24510

Procurement Specification
MIL-C-5809

SUPERSEDES:

PAGE 2 OF 5

DD FORM 1 MAY 73 672 (Coordinated ...

FED. SUP CLASS
5925

TABLE I

ELECTRICAL AND MECHANICAL CHARACTERISTICS											
DASH NUMBER	CAPACITY AMPERES	VOLTAGE DROP MAX	WEIGHT MAX LBS	OPERATING FORCE MAX LBS		ENDURANCE CYCLES					
						RESISTIVE		INDUCTIVE		MECH NO LOAD
				PULLOUT	RESET	AC	DC	AC	DC	
-3	3	.75	.078	8	12	(a) 5,000	(b) 5,000	(a) 5,000 .6 TO .7 LAG P.F.	(b) 1,000	10,000
-5	5	.65								
-7 1/2	7.5	.50								
-10	10									
-15	15									
-20	20									
-25	25									
-30	30									
-35	35.									

(a) 400 CYCLE 115/200 VOLT SYSTEM, TESTED AT 120 ±5 VOLTS 380-420 HZ.
(b) 28 VOLT DC SYSTEM, TESTED AT 30 ±2 VOLTS.

TABLE II

DETAIL CALIBRATION REQUIREMENTS-TRIP TIME IN SECONDS															
DASH NUMBER	+25° C					-40° C					+71° C				
	PERCENT RATED CURRENT					PERCENT RATED CURRENT					PERCENT RATED CURRENT				
	115	145	200	400	600	138	175	200	400	600	80	125	200	400	600
-3	NO TRIP 1 HOUR MAX	TRIP WITHIN 1 HOUR	40-100	3-22	1-10	NO TRIP 1 HOUR MAX	TRIP WITHIN 1 HOUR	(*)	(*)	(*)	NO TRIP 1 HOUR MAX	TRIP WITHIN 1 HOUR	(*)	(*)	(*)
-5															
-7 1/2			10 to 70	0.75 to 7.0	0.25 to 2.5										
-10															
-15			"	"	"										
-20			"	"	"										
-25			"	"	"										
-30			"	"	"										
-35			"	"	"										

AMBIENT TEMPERATURE TOLERANCE ±2°C

(*) Not applicable

APPROVED 22 APR 1959 REVISED Ⓙ For changes see pages 1,2,3,4 & 5

P.A AF - 85 Other Cust NAVY - AS ARMY - ER	International interest SEE NOTE 6	TITLE Ⓙ CIRCUIT BREAKER, TRIP-FREE, RECYCLING, PUSH-PULL, 3 THROUGH 35 AMPERES, TYPE I	MILITARY STANDARD MS24510
Procurement Specification MIL-C-5809		SUPERSEDES:	PAGE 3 OF 5

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

FED. SUP CLASS
5925

TABLE III

DASH NUMBER	RUPTURE CURRENT (AMPERES) REQUIREMENTS									
	TEST DESIGNATION PER MIL-C-5809									
	A	B	C	D	E	F	G		H	
							1 Ø	3 Ø	1 Ø	3 Ø
-~~3~~	3,500	3,500	6,000	6,000	1,000	1,500	(✳)	(✳)	(✳)	(✳)
-5										
-7 1/2										
-10										
-15										
-20										
-2~~5~~										
-3~~0~~										
-3~~5~~										

(✳)NOT APPLICABLE

TABLE IV

ENVIRONMENTAL PERFORMANCE	
MAX OPERATING ALTITUDE-FT	70,000
OPERATING AMBIENT TEMP RANGE	-40°C TO +71°C
VIBRATION	MIL-STD-202, METHOD 204, CONDITION A
SHOCK	30 G, MIL-STD-202, METHOD 213A, TEST J
ACCELERATION	10 G

MILITARY PART NUMBER. THE MILITARY PART NUMBER SHALL CONSIST OF THE MILITARY STANDARD NUMBER, THE CONFIGURATION LETTER AND THE DASH NUMBER

EXAMPLE: MS 24510-B-7 1/2

MILITARY STD

CONFIGURATION "B"
(COVER PLATE MOUNT)

7.5 AMPERE
CURRENT RATING

-~~30~~ INACTIVE FOR NEW DESIGN AFTER 1 AUG 1975

NOMINAL VOLTAGE RATING
28 V dc OR 115 V 400Hz

APPROVED 22 APR 1959

REVISED Ⓙ For changes see pages 1,2,3,4&5

User activities: Army -
Navy -
Air Force -

Review activities: Army -
Navy -
Air Force - 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications for repetitive use shall be made from this document when applicable.

P.A AF - 85 Other Cust NAVY - AS ARMY - E R	International interest SEE NOTE 6	TITLE Ⓙ CIRCUIT BREAKER, TRIP-FREE, RECYCLING, PUSH-PULL, 3 THROUGH 35 AMPERES, TYPE I	MILITARY STANDARD MS24510
Procurement Specification MIL-C-5809		SUPERSEDES:	PAGE 4 OF 5

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications for repetitive use shall be made from this document when applicable.

Review activities: Army -
Navy -
Air Force - 99

User activities: Army -
Navy -
Air Force -

FED. SUP CLASS
5925

CROSS REFERENCE. FOR APPLICABLE CROSS REFERENCE SEE TABLE V. THE EXISTING STOCKS OF SUPERSEDED ITEMS MAY BE USED. WHEN EXHAUSTED, THE SUPERSEDING PARTS SHALL BE USED.

CROSS REFERENCE

TABLE V

SUPERSEDING NUMBER	SUPERSEDED NUMBERS					
	FSCM 96906	FSCM 82647	FSCM 82647	FSCM 82647	FSCM 82647	FSCM 98749
MS24510-A-3	MS24510-3	D7271-8-3	D7271-1-3	7271-1-3	7271-8-3	
A-5	5	8-5	1-5	1-5	8-5	
A-7 1/2	7 1/2	8-7	1-7	1-7	8-7	
A-10	10	8-10	1-10	1-10	8-10	
A-15	15	8-15	1-15	1-15	8-15	
A-20	20	8-20	1-20	1-20	8-20	
A-25	25	8-25	1-25	1-25	8-25	
A-30	30	8-30	1-30	1-30	8-30	
A-35	MS24510-35	-8-35	D7271-1-35	1-35	7271-8-35	
B-3		3-3		3-3		7136028-3
B-5		3-5		3-5		5
B-7 1/2		3-7		3-7		7
B-10		3-10		3-10		10
B-15		3-15		3-15		15
B-20		3-20		3-20		20
B-25		3-25		3-25		25
B-30		3-30		3-30		30
MS24510-B-35		D7271-3-35		7271-3-35		7136028-35

APPROVED 22 APR 1959 REVISED (H) For changes see page 3 (J) FOR CHANGES SEE PAGES 1, 2, 3, 4 & 5

P.A AF - 85 Other Cust NAVY - AS ARMY - ER	International interest SEE NOTE 6	TITLE (J) CIRCUIT BREAKER, TRIP-FREE, RECYCLING, PUSH-PULL, 3 THROUGH 35 AMPERES, TYPE I	MILITARY STANDARD MS24510
Procurement Specification MIL-C-5809		SUPERSEDES:	PAGE 5 OF 5