
FED. SUP CLASS
6685

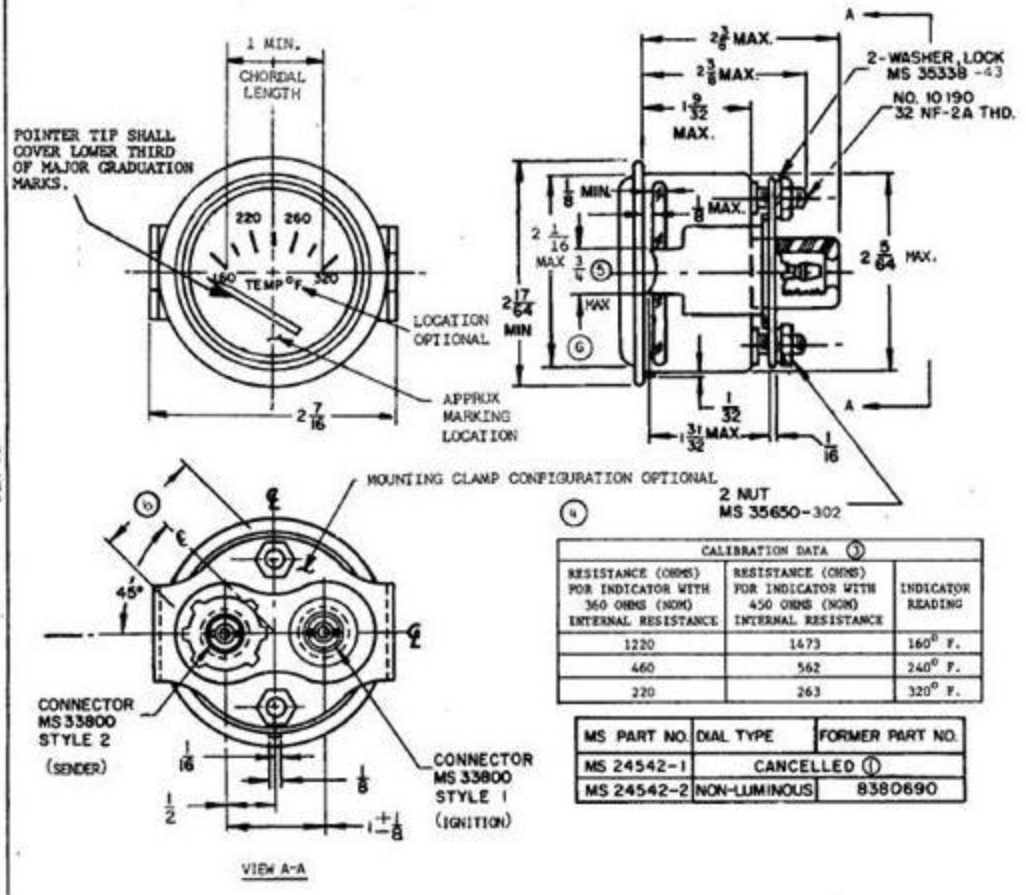

CALIBRATION DATA ③		
RESISTANCE (OHMS) FOR INDICATOR WITH 360 OHMS (NOM) INTERNAL RESISTANCE	RESISTANCE (OHMS) FOR INDICATOR WITH 450 OHMS (NOM) INTERNAL RESISTANCE	INDICATOR READING
1220	1473	160° F.
460	562	240° F.
220	263	320° F.

MS PART NO.	DIAL TYPE	FORMER PART NO.
MS 24542-1	CANCELLED ①	
MS 24542-2	NON-LUMINOUS	8380690

REVIEWER ACTIVITIES:
ARMY-ER
AF-82
NAVY-MC
DLA-GS

USER ACTIVITIES:
ARMY-ME
NAVY-YD

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 27 OCTOBER 1956 REVISED ⑤ 11 SEPTEMBER 1978 ⑥ 25 SEP 1980 (H) 16 MAR 87

(H) DENOTES CHANGES

P.A. ARMY-AI Other Cust AF-99	TITLE INDICATOR, TEMPERATURE, ELECTRICAL RESISTANCE: 24 VOLT DC, RANGE 160°-320°F	MILITARY STANDARD MS24542
PROCUREMENT SPECIFICATION MIL-I-10986	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Continued) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 6685-0630

☆U.S. GOVERNMENT PRINTING OFFICE: 1980—703-023/4368

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:56Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. REPLACEMENT DATA: MS24542-2 IS THE REPLACEMENT FOR MS 24542-1.
2. TYPE II (TEMPERATURE) UNIT I (INDICATOR), OF PROCUREMENT SPECIFICATION
3. MUST OPERATE LINEARLY AND ACCURATELY WHEN PROPERLY CONNECTED IN A CIRCUIT WITH ASSOCIATED TRANSMITTER, MS24537
4. RELATIVE LOCATION AND CONFIGURATION OF CONNECTORS AND CLAMPS OPTIONAL, PROVIDED THAT DIAL ILLUMINATION IS NOT ADVERSELY AFFECTED
5. MOUNTING CLAMPS SHALL BE SHARP TO ASSURE GROUNDING
6. FOUR (4) ILLUMINATING WINDOWS, 1-5/32 MINIMUM CHORDAL LENGTH, EQUALLY SPACED 45° OFF HORIZONTAL CENTERLINE (360° ILLUMINATING WINDOW OPTIONAL)
7. (H) UNLESS OTHERWISE SPECIFIED, STEEL PARTS SHALL BE ZINC PLATED, TYPE II, SERVICE CONDITION OF ASTM B633.
8. CENTERLINE OF DIAL FACE SHALL BE WITHIN ± 2° OF INDICATOR VERTICAL AXIS. VERTEX OF ANGULAR DIMENSIONS IS LOCATED AT POINTER PIVOT
9. THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/2.
10. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES, TOLERANCES ARE ± 1/64 ON FRACTIONS, ± 1° ON ANGULAR DIMENSIONS.
11. MARKING SHALL CONSIST OF THE MS PART UMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

NOTES:

1. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREIN BY DIMENSIONS, NOTATIONS, OR REFERENCED DOCUMENTS.
2. (H) REFERENCED GOVERNMENT DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
3. (H) IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
4. (H) THE USE OF RECYCLED MATERIALS WHICH MEET THE REQUIREMENTS OF THE APPLICABLE MATERIAL SPECIFICATIONS WITHOUT JEOPARDIZING THE INTENDED USE OF THE ITEM SHALL BE ENCOURAGED.

APPROVED 27 OCTOBER 1958 REVISED (H) FOR CHANGES SEE SHEETS 1 & 2

P.A. Other Cust	TITLE INDICATOR, TEMPERATURE, ELECTRICAL RESISTANCE: 24 VOLT DC, RANGE 160°-320°F	MILITARY STANDARD MS24542
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:56Z
Check the source to verify that this is the current version before use.