This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Reviewer: Navy - AS

User: Army - AV

DD FORM 1426 672-1 (Coordinated)

PROCUREMENT SPECIFICATION MIL-S-8932

P.A. Navy - AS
Other Cent
Army - AV

SUPERSEDES

TITLE

SWITCHES, PRESSURE, BULKHEAD MOUNTED (TYPE II)


MILITARY STANDARD


MS25276


SHEET 1 OF 4

(A) DENOTES CHANGES

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

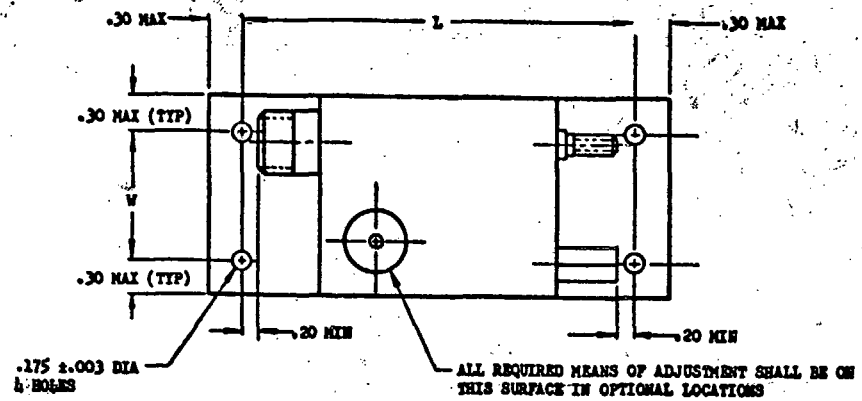

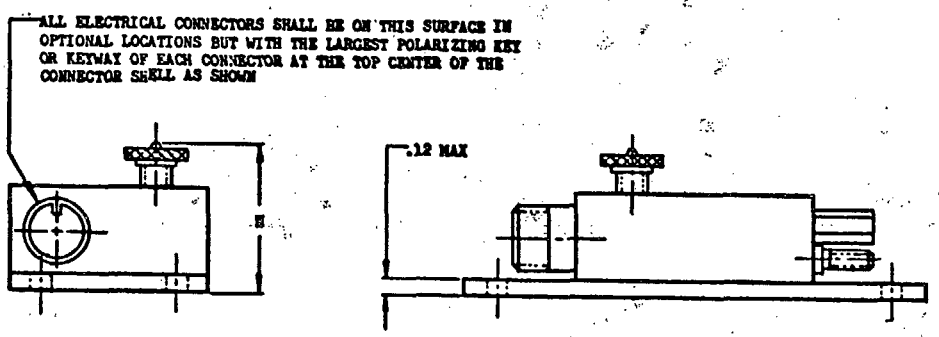

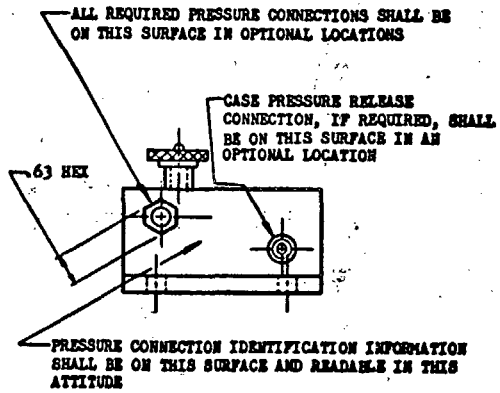

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: TWO PLACE DECIMALS ±.02, THREE PLACE DECIMALS ±.010.

THE INSTRUMENT NEED NOT HAVE THE SHAPE SHOWN, BUT THE INSTRUMENT, INCLUDING ALL MEANS OF ADJUSTMENT WITH ALL COVERS INSTALLED THEREON, MUST BE CONTAINED WITHIN THE OUTLINE SHOWN.

EXAMPLE OF PART NUMBERS:

MS25275 - 2A = CLASS 1; ABSOLUTE PRESSURE SWITCH DESIGN.
MS25275 - 4D = CLASS 2; DIFFERENTIAL PRESSURE SWITCH DESIGN.
MS25275 - 33G = CLASS 3; GAGE PRESSURE SWITCH DESIGN.
MS25275 - 33H = CLASS 4; APPROXIMATE GAGE PRESSURE SWITCH DESIGN.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 28 JAN 1965 REVISED (A) 15 AUGUST 80

FED. SUP CLASS 1650

PROJECT NO. 1650-0354

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:07Z
Check the source to verify that this is the current version before use.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Reviewer: Navy - AS

User: Army - AY

(A)

DASH NO. CLASS 1	CLASS 2	CLASS 3	CLASS 4	POTENTIAL OPERATING RANGE (INCHES MERCURY ABSOLUTE)	NORMAL SYSTEM PRESSURE (INCHES MERCURY ABSOLUTE)	TOLERANCE ± (INCHES MERCURY ABSOLUTE)	MAX AC CURRENT AMPERES	MAX DC CURRENT AMPERES	MAX WEIGHT LBS	SCHEMATIC FIGURE	APPLICABLE SPECIFICATIONS CLASS 1	CLASS 2	CLASS 3	CLASS 4	DIM H MAX INCHES	DIM L INCHES	DIM W INCHES
-1A				.10-1.00	30	.06	5.0	3.0	1.75	1	MIL-S-8932/1				2.312	4.400	2.300
-2A									2.00	2							
	-3D						3.0	1.0	1.75	1		MIL-S-8932/2					
	-4D								2.00	2							
	-5D			.30-5.00		.30			1.75	1							
	-6D								2.00	2							
-7A				1.00-10.00		.60	5.0	3.0	1.75	1	MIL-S-8932/1						
-8A									2.00	2							
-9A				2.00-15.00		.75			1.75	1							
-10A									2.00	2							
	-11D						3.0	1.0	1.75	1		MIL-S-8932/2					
	-12D								2.00	2							
	-13D			2.00-20.00		1.00			1.75	1							
	-14D								2.00	2							
-15A				3.00-27.00	40	1.40	5.0	3.00	1.75	1	MIL-S-8932/1				1.344	3.700	1.200
-16A									2.00	2					2.312	4.400	2.300
	-17D						3.0	1.00	1.75	1		MIL-S-8932/2					
	-18D								2.00	2							
-19A				4.00-36.00		1.90	8.0	4.0	1.50	1	MIL-S-8932/1				1.344	3.700	1.200
-20A									1.75	2					2.312	4.400	2.300
	-21D						5.0	3.0	1.50	1		MIL-S-8932/2					
	-22D								2.00	2							
-23A				5.00-50.00	55	3.00	8.0	4.0	1.50	1	MIL-S-8932/1				1.344	3.700	1.200
-24A									1.75	2					2.312	4.400	2.300
-25A				6.00-63.00	70	3.10	10.0	5.0	1.25	1					1.344	3.700	1.200
-26A									1.50	2					2.312	4.400	2.300
-27A				8.00-72.00	80	3.40			1.25	1					1.344	3.700	1.200
-28A									1.50	2					2.312	4.400	2.300
-29A				9.00-90.00	100	4.10	12.0	7.0	1.25	1					1.344	3.700	1.200
-30A									1.50	2					2.312	4.400	2.300
-31A				10.00-135.00	150	6.0			1.25	1					1.344	3.700	1.200
-32A									1.50	2					2.312	4.400	2.300

P.A. Navy - AS
Other Cust Army - AY

PROCUREMENT SPECIFICATION MIL-S-8932

SUPERSEDES:

TITLE SWITCHES, PRESSURE, BULKHEAD MOUNTED, (TYPE II)

MILITARY STANDARD

MS25276

SHEET 2 OF 4

FED. SUP CLASS 1650

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

APPROVED 28 JAN 1965 REVISED (A) FOR CHANGES SEE SHEETS 1 THRU 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:07Z
Check the source to verify that this is the current version before use.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Reviewer: Navy - AS

User: Army - AV

P.A. Navy - AS
Other Coat
Army - AV

PROCUREMENT SPECIFICATION MIL-S-8932

SUPERSEDES

TITLE

SWITCHES, PRESSURE, BULKHEAD MOUNTED, (TYPE II)

MILITARY STANDARD

MS25276

SHEET 3 OF 4

FED. SUP CLASS 1650

DASH NO. CLASS 1	CLASS 2	CLASS 3	CLASS 4	POTENTIAL OPERATING RANGE PSI	NORMAL SYSTEM PRESSURE	TOLERANCE ±	MAX AC CURRENT AMPERES	MAX DC CURRENT AMPERES	MAX WEIGHT LBS	APPLICABLE SPECIFICATIONS SCHEMATIC FIGURE	CLASS 1	CLASS 2	CLASS 3	CLASS 4	DIM H MAX INCHES	DIM L INCHES	DIM W INCHES
		-33D	-33H	.50-4.50	5	.25	5.0	3.0	1.25	1			MIL-S-8932/3	MIL-S-8932/4	2.312	4.400	2.300
		-34D	-34H						1.50	2							
	-35D								1.50	1		MIL-S-8932/2			1.344	3.700	1.200
	-36D									2							
	-37D			3.00-9.00	10	.50				1			- -	- -			
	-38D									2							
		-39D	-39H			.49			1.25	1			MIL-S-8932/3	MIL-S-8932/4	2.312	4.400	2.300
		-40D	-40H						1.50	2					1.344	3.700	1.200
	-41D			2.00-10.00	20	1.00	8.0	4.0		1		MIL-S-8932/2					
	-42D									2							
		-43D	-43H			.98	5.0	3.0	1.25	1			MIL-S-8932/3	MIL-S-8932/4	2.312	4.400	2.300
		-44D	-44H						1.50	2					1.344	3.700	1.200
	-45D			4.00-16.00	40	1.70	8.0	4.0		1		MIL-S-8932/2					
	-46D									2							
		-47D	-47H						1.25	1			MIL-S-8932/3	MIL-S-8932/4	2.312	4.400	2.300
		-48D	-48H						1.50	2					1.344	3.700	1.200
	-49D			6.00-54.00	60	2.30	10.0	5.0	1.50	1			MIL-S-8932/3		1.344	3.700	1.200
	-50D									2					2.312	4.400	2.300
		-51D	-51H			2.69	8.0	4.0	1.25	1			MIL-S-8932/3	MIL-S-8932/4	1.344	3.700	1.200
		-52D	-52H						1.50	2					2.312	4.400	2.300
		-53D	-53H	8.00-72.00	80	2.60			1.00	1					1.344	3.700	1.200
		-54D	-54H						1.25	2					2.312	4.400	2.300
		-55D	-55H	10.00-90.00	100	3.10			1.00	1					1.531	5.300	1.000
		-56D	-56H						1.25	2					1.344	3.700	1.200
	-57D			15.00-135.00	150	4.10	10.0	5.0	1.50	1							
	-58D									2		MIL-S-8932/2			1.531	5.300	1.000
		-59D	-59H	20.00-180.00	200	4.20			1.00	1							
		-60D	-60H						1.25	2			MIL-S-8932/3	MIL-S-8932/4	1.344	3.700	1.200
	-61D			20.00-225.00	250	4.40	12.0	7.0	1.50	1							
	-62D									2		MIL-S-8932/2			1.531	5.300	1.000

APPROVED 28 JAN 1965 REVISED (A) FORCCHANGES SEE SHEETS 1 THRU 4

DD FORM 672-1 (Obsolete)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:07Z
Source to verify that this is the current version before use.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Reviewer: Navy - AS

User: Army - AV

DD FORM 672-1 (Coordinator)

PROCUREMENT SPECIFICATION: MIL-S-8932

P.A. Navy - AS
Other Cont Army - AV

SUPERSEDES:

TITLE: SWITCHES, PRESSURE, BULKHEAD MOUNTED, (TYPE II)

MILITARY STANDARD

MS25276

SHEET 4 OF 4

(A)

DASH NO. CLASS 1	DASH NO. CLASS 2	DASH NO. CLASS 3	DASH NO. CLASS 4	POTENTIAL OPERATING RANGE PSI	NORMAL SYSTEM PRESSURE PSI	TOLERANCE ± PSI	MAX AC CURRENT AMPERES	MAX DC CURRENT AMPERES	MAX WEIGHT LBS	APPLICABLE SPECIFICATIONS SCHEMATIC FIGURE	CLASS 1	CLASS 2	CLASS 3	CLASS 4	DIM H MAX INCHES	DIM L INCHES	DIM W INCHES
		-63G	-63H	20.00-225.00	250	4.50	10.0	5.0	1.00	1			MIL-S-8932/3	MIL-S-8932/4	1.531	5.300	1.000
		-64G	-64H						1.25	2					1.344	3.700	1.200
		-65G	-65H	25.00-450.00	500	8.0			1.00	1					1.531	5.300	1.000
		-66G	-66H						1.25	2					1.344	3.700	1.200
	-67D			50.00-450.00		5.0	12.0	7.0	1.50	1		MIL-S-8932/2			1.531	5.300	1.000
	-68D									2							
	-69D			100.00-900.00	1000	10.0	15.0	10.0		1							
	-70D									2							
	-71D			200.00-1350.00	1500	15.0				1							
	-72D									2							
		-73G	-73H	300.00-675.00	750	10.0	10.0	5.0	1.00	1			MIL-S-8932/3	MIL-S-8932/4	1.531	5.300	1.000
		-74G	-74H						1.25	2					1.344	3.700	1.200
		-75G	-75H	500.00-900.00	1000	15.0			1.00	1					1.531	5.300	1.000
		-76G	-76H						1.25	2					1.344	3.700	1.200
		-77G	-77H	500.00-1350.00	1500	18.0	12.0	7.0	1.00	1					1.531	5.300	1.000
		-78G	-78H						1.25	2					1.344	3.700	1.200
		-79G	-79H	750.00-1800.00	2000	20.0			1.00	1					1.531	5.300	1.000
		-80G	-80H						1.25	2					1.344	3.700	1.200
		-81G	-81H	1000.00-2250.00	2500	23.00	15.0	10.0	1.00	1					1.531	5.300	1.000
		-82G	-82H						1.25	2					1.344	3.700	1.200
		-83G	-83H	1800.00-2700.00	3000	25.00			1.00	1					1.531	5.300	1.000
		-84G	-84H						1.25	2					1.344	3.700	1.200
		-85G	-85H	1000.00-2700.00		30.00			1.00	1					1.531	5.300	1.000
		-86G	-86H						1.25	2					1.344	3.700	1.200
		-87G	-87H	2000.00-4050.00	4500	50.00			1.00	1					1.531	5.300	1.000
		-88G	-88H						1.25	2					1.344	3.700	1.200

FED. SUP CLASS 1650

APPROVED 28 JAN 1965 REVISED (A) FOR CHANGES SEE SHEETS 1 THRU 4

Source: https://assistdocs.com - Downloaded: 2020-10-23T15:07Z
Check the source to verify that this is the most current version before use.