


FED SUP CLASS
5130

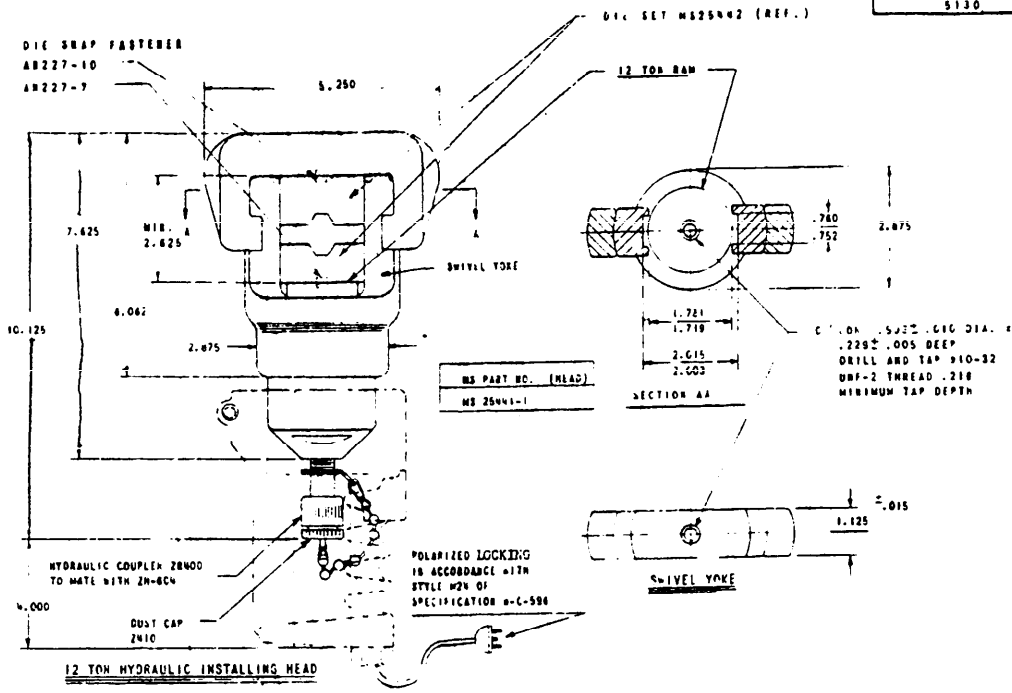

THE 12 TON HYDRAULIC INSTALLING HEAD CONSISTS OF:
A. SWIVEL YOKE
B. 12 TON HYDRAULIC RAM
C. HYDRAULIC COUPLER, ZR-400 BLACKHAWK MFG. CO. (OR EQUIVALENT)
D. DUST CAP Z-H10 BLACKHAWK MFG. CO. (OR EQUIVALENT)
MAXIMUM WEIGHT OF HEAD WITH HANDLE (LESS DIES) 9 LBS.
WORKING PRESSURE, 9,700± 200 PSI.
FINISH, BLACK OXIDE.
CONTROL HANDLE SWITCHES SHALL OPERATE ON 12 VOLTS, 60 CYCLES, SINGLE PHASE.
ALL DIMENSIONS IN INCHES (MAXIMUM) UNLESS OTHERWISE SPECIFIED.
HYDRAULIC INSTALLING HEAD & CONTROL HANDLE DESIGN IS OPTIONAL -
DIMENSIONS SHOWN NOT TO BE EXCEEDED.
USE ONLY MIL-H-5606 HYDRAULIC AIRCRAFT PETROLEUM BASE OIL.

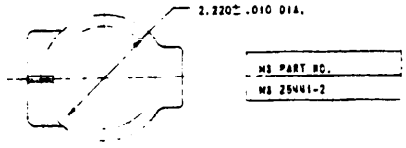


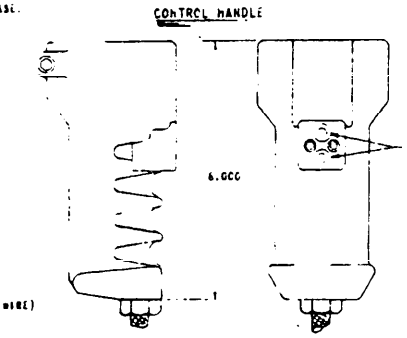

MS25441 SUPERSEDES MS25441(WEP) AS A FULLY COORDINATED DOCUMENT

SHEET 4 ADDED.

POLARIZED FEMALE PLUG IN ACCORDANCE WITH STYLE M 42 OF SPECIFICATION W-C-596

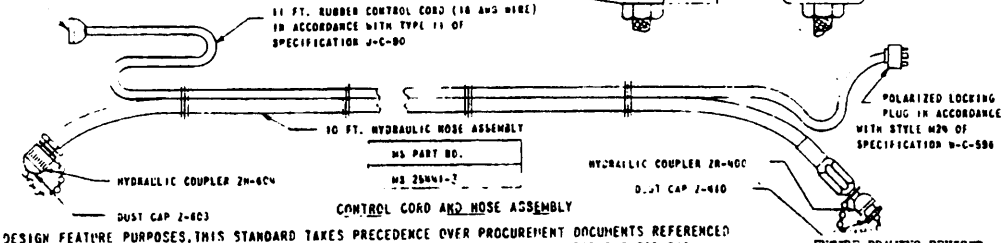

CONTROL CORD AND HOSE ASSEMBLY

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

ENTIRE DRAWING REVISED

APPROVED 25 JAN. 60 REVISED (D) 8/15/63 (C) 15 April 64

Reviewers and Users: Army - EL, Navy - Weps, USAF - 11

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.


P.A. Navy - Weps Other Cust Army - EL USAF - 11 (C)	TITLE CRIMPING TOOL, TERMINAL, HYDRAULIC OPERATED, WIRE SIZE 8 THRU 4/0 (C)	MILITARY STANDARD MS25441
PROCUREMENT SPECIFICATION MIL-I-22909	SUPERSEDES: MS25441 IN PART	SHEET 1 OF 4

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:09Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5130

MS PART NO.
MS-25441-2

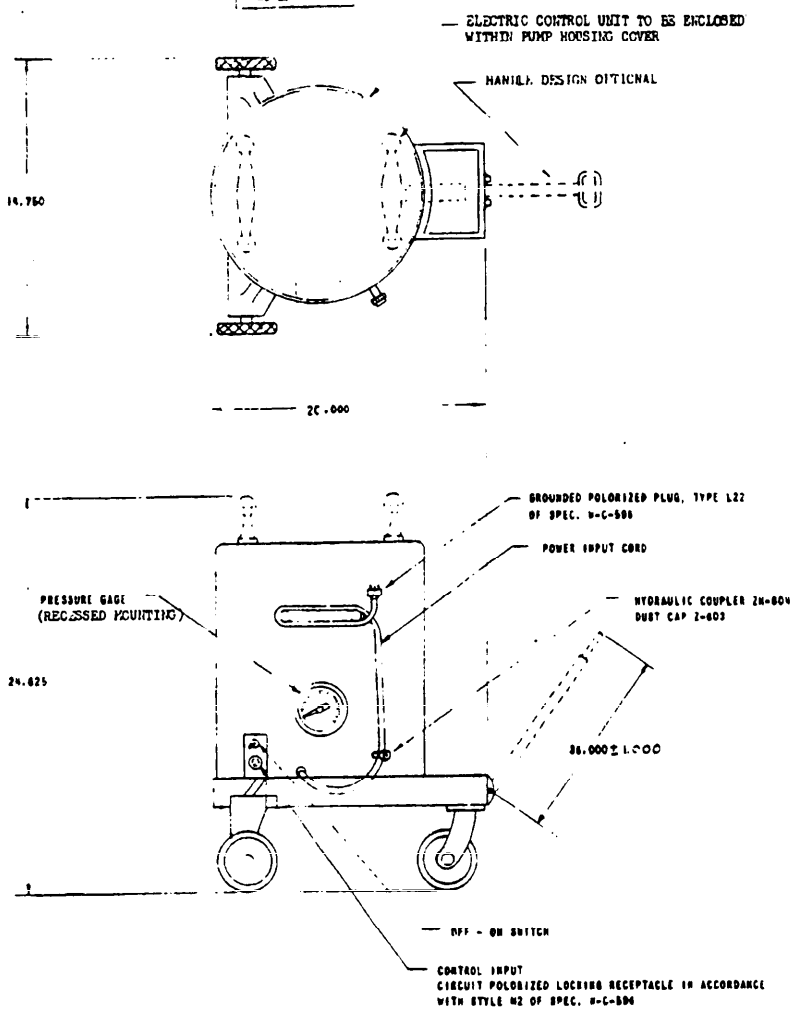

ELECTRIC HYDRAULIC PUMP CONFIGURATION IS OPTIONAL. DIMENSIONS SHOWN SHALL NOT BE EXCEEDED.
~~working pressure 07000 200 PSI.~~
USE ONLY MIL-H-5606 HYDRAULIC AIRCRAFT PETROLEUM BASE OIL.
HYDRAULIC GAGE COMMERCIAL, SAFETY TYPE, 4.500 MINIMUM FACE DIAMETER, SHALL HAVE A FULL SCALE READING OF ZERO TO 20,000 PSI.
THE WORKING PRESSURE AREA OF 9000 TO 9800 PSI ON THE GAGE SCALE SHALL BE GREEN
POWER INPUT CORD SHALL BE 25 FEET MINIMUM LENGTH, RESISTANT TO MIL-H-5606 FLUID AND BE THE 3 WIRE GROUNDED TYPE.
POWER INPUT SHALL BE 110 VOLTS, 60 CYCLE, SINGLE PHASE.
INCORPORATE AN AUTOMATIC PRESSURE SAFETY RELEASE VALVE CALIBRATED TO RELEASE AT 9800 PSI.
A. AUTOMATIC CONTROL TO AUTOMATICALLY RELEASE PRESSURE AND RETRACT DIES WHEN DIES ARE IN FULLY CLOSED POSITION.
B. AUTOMATIC CONTROL CIRCUIT SHALL HAVE PROVISION FOR RESETTING BY OPERATOR.
C. PUMP SWITCH SHALL OPERATE MAGNETIC RELAY INCORPORATED IN AUTOMATIC CONTROL HOUSING.
PROVIDE MASTER CONTROL SWITCH TO AFFORD COMPLETE POWER REMOVAL WHEN TOOL IS NOT IN USE. (POSITION OPTIONAL)
USE HYDRAULIC COUPLER ZN-804 TO ATTACH HOSE TO PUMP. BLACKHAWK MANUFACTURING CO. (OR EQUIVALENT)
DIMENSIONS IN INCHES AND ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.

APPROVED 25 JAN 60 REVISED (C) FOR CHANGES SEE SHEETS 1, 2, 3 AND 4.

Reviewers and Users:
Army - EL
Navy - Wepr
USAF - 11

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.


P.A. Navy - Wepr Other Cust Army - EL USAF - 11 (2)	TITLE CRIMPING TOOL, TERMINAL, HYDRAULIC OPERATED, WIRE SIZE 8 THRU 4/0 (3)	MILITARY STANDARD MS25441
PROCUREMENT SPECIFICATION AAA-I-22909	SUPERSEDES: MS25494 IN PART	SHEET 2 OF

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-23T15:09Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5130

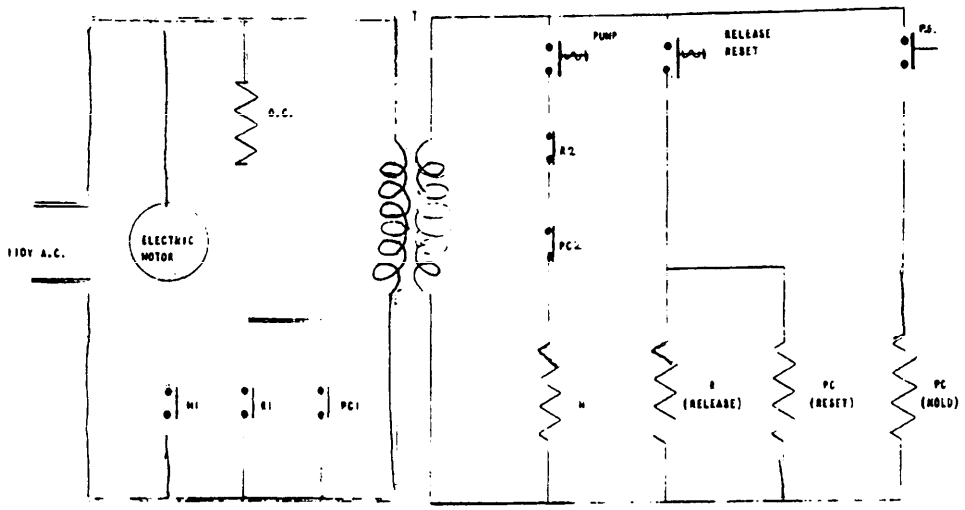


AUTOMATIC PRESSURE RELEASE
CONTROL CIRCUIT

AUTOMATIC PRESSURE RELEASE CONTROL CIRCUIT DESIGN IS OPTIONAL - OPERATION MUST BE AS OUTLINED ON SHEET 2.

LEGEND:

O.C. - OIL FLOW CONTROL VALVE
R. - OIL CONTROL RELAY, 12V, 60~
M. - MOTOR CONTROL RELAY, 12V, 60~
P.C. - MAGNETIC RELAY - WITH HOLD COIL AND RELEASE COIL, 12V, 60~
P.S. - PRESSURE SWITCH
T. - STEP-DOWN TRANSFORMER (110/12) 50 WATTS

SYMBOL:



Reviewers and Users:
Army - EL
Navy - Wcps
USAF - 11

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 21 Jan 60 REVISED (See) FOR CHANGES SEE SHEETS 1, 2, 3 AND 4


P.A. Navy - Wcps Other Cust Army - EL USAF - 11 C	TITLE CRIMPING TOOL, TERMINAL, HYDRAULIC OPERATED, WIRE SIZE 8 THRU 4/0 C	MILITARY STANDARD MS25441
PROCUREMENT SPECIFICATION MIL-I-22909	SUPERSEDES: MS25494 IN PART	SHEET 3 OF

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:09Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5130

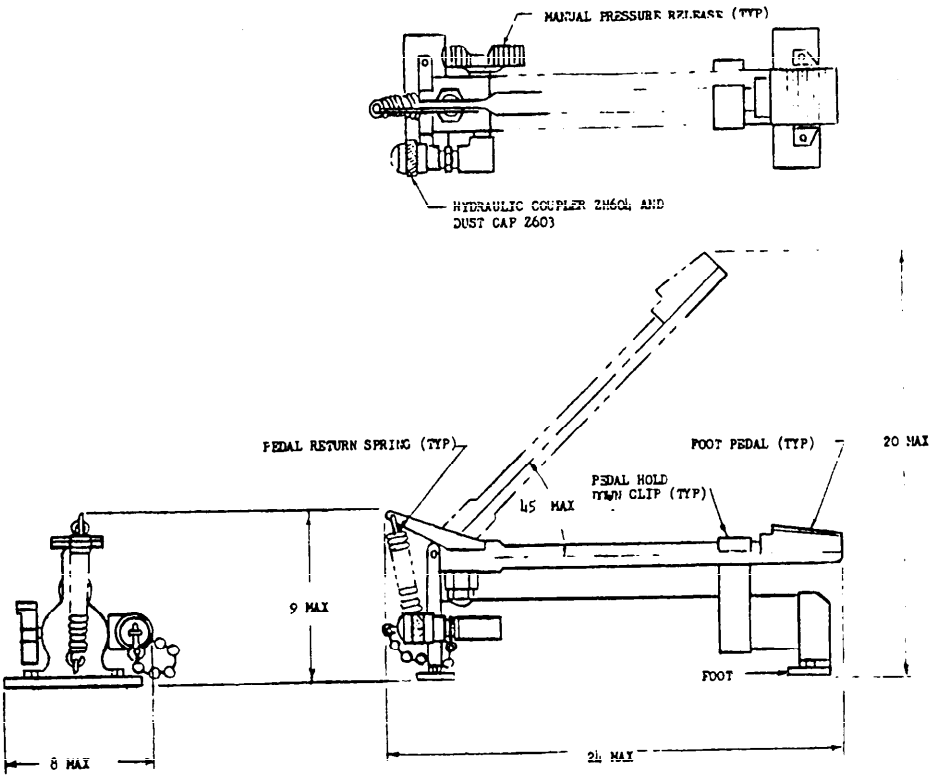

MANUALLY OPERATED HYDRAULIC CRIMPING TOOL

MS PART NO.
MS 25441-5

USE HYDRAULIC COUPLER ZH604 TO ATTACH HOSE TO PUMP, BLACKHAWK MANUFACTURING COMPANY (OR EQUIVALENT).

USE ONLY MIL-H-5606 HYDRAULIC AIRCRAFT PETROLEUM BASE OIL.

SAFETY BY-PASS RELEASE PRESSURE 9700± 200 PSI.

CONFIGURATION OF PUMP MAY VARY TO THAT SHOWN TO SUIT THE INDIVIDUAL MANUFACTURER'S DESIGN.

THE PUMP SHALL BE A TWO SPEED PUMP.

THE FOOT PEDAL MAY BE OF ONE OR TWO LEVERS.

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED.

APPROVED 25 Jan 60 REVISED (C) FOR CHANGES SEE SHEETS 1, 2, 3 AND 4.

Reviewers and Users: Army - EL, Navy - Wcps, USAF - 11

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. Navy - Wcps Other Cust Army - EL USAF - 11	TITLE CRIMPING TOOL, TERMINAL HYDRAULIC OPERATED, WIRE SIZE 8 THRU 4/0 (C)	MILITARY STANDARD MS25441
PROCUREMENT SPECIFICATION MIL-I-22909	SUPERSEDES: MS25494 IN PART	SHEET 4 OF

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-23T15:09Z
Check the source to verify that this is the current version before use.