



INACTIVE FOR NEW DESIGN AFTER 30 SEPT 1987
NO SUPERSEDING STANDARD

FED. SUP CLASS
5945

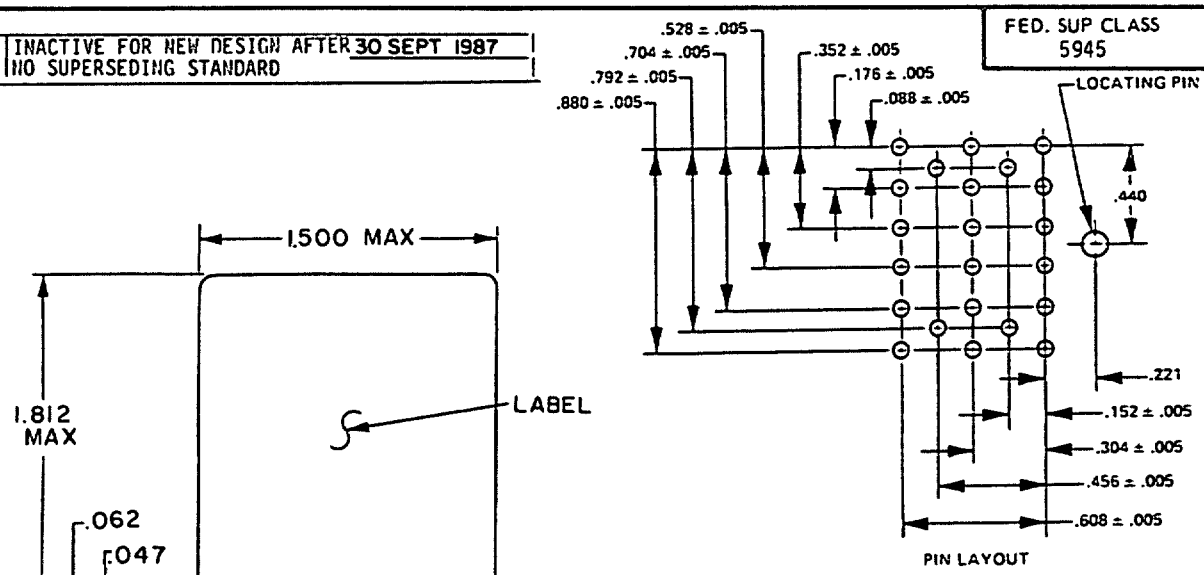


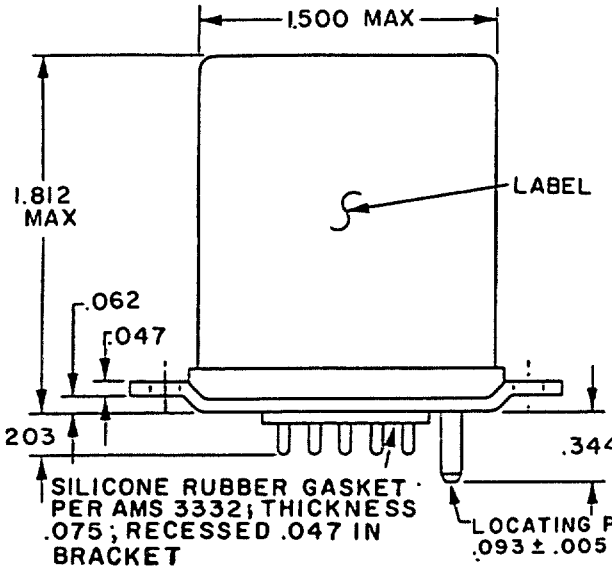

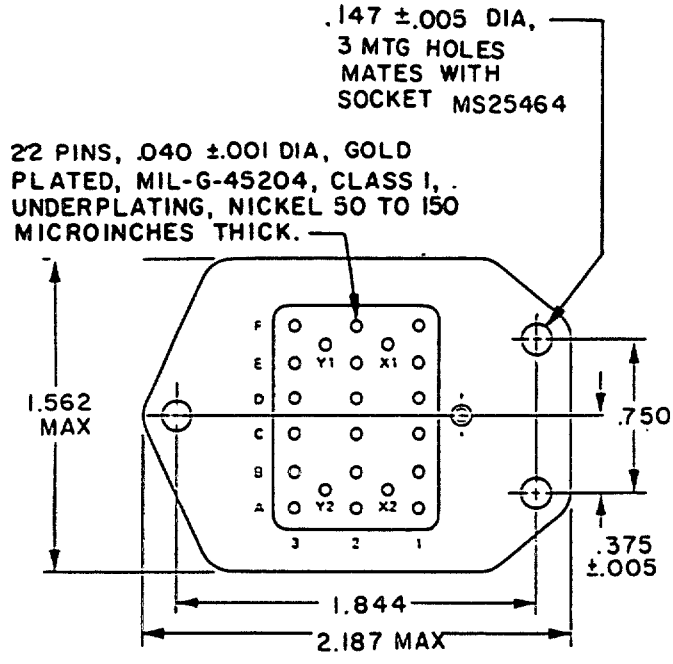

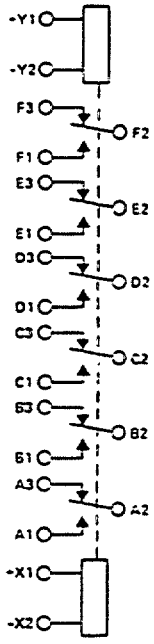

CIRCUIT DI
(SEE NOTES 7 AND 9)

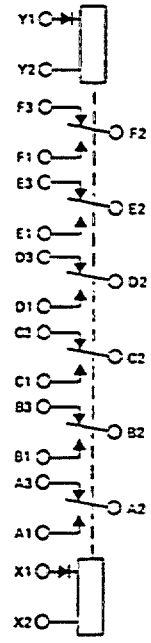

CIRCUIT AI
(SEE NOTES 4, 7, AND 9)

APPROVED 1 Nov 1960 REVISED Ⓖ 30 SEPT 1987

Ⓖ ENTIRE STANDARD REVISED

P.A	International Interest	TITLE	MILITARY STANDARD
AF - 85 Other Cust Navy - AS		RELAYS, ELECTROMAGNETIC, 6PDT, 5 AMPERES, TYPE I, MAGNETIC LATCH, SOCKET MOUNTED, HERMETICALLY SEALED	MS25463
Procurement Specification MIL-R-6106		SUPERSEDES:	PAGE 1 OF 5

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5945-0767-03

AMSC N/A

DISTRIBUTION STATEMENT A. - Approved for public release; distribution is unlimite

User activities: Army - Navy - Air Force -

Review activities: Army - EC Navy - Air Force - 11, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:10Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.001	0.03	.152	3.86	.608	15.44
.005	0.13	.176	4.47	.704	17.88
.040	1.02	.203	5.16	.750	19.05
.047	1.19	.221	5.61	.792	20.12
.062	1.57	.304	7.72	.880	22.35
.075	1.91	.352	8.94	1.500	38.10
.088	2.24	.375	9.53	1.562	39.67
.093	2.36	.456	11.58	1.812	46.02
.147	3.73	.528	13.41	1.844	46.84
				2.187	55.55

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm).
4. The use of diodes on ac relays is optional. Actual application must be shown on label.
5. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
6. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein.
7. Terminal numbers need not appear on relay header. There shall be affixed to the relay a suitable legible circuit diagram that identifies each terminal location.
8. Pins to be perpendicular to header surface within one degree.
9. Relay is magnetically latched in both positions. Caution note to observe polarity must appear on relays with dc coils.
10. Shock, vibration, and acceleration requirement applicable with coils de-energized.

Table I. Dash numbers and characteristics. 1/

Dash number MS25463-	Type	Coil	Terminal type	Mounting	Max weight in pounds
D1	I	dc	Plug-in	bracket	0.40
A1	I	ac	Plug-in	bracket	0.42

1/ MS25463-AD1 canceled without replacement.

APPROVED 1 Nov 1960 REVISED Ⓖ ENTIRE STANDARD REVISED

User activities: Army - Navy - Air Force -
Review activities: Army - EC Navy - Air Force - 11, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A	International interest	TITLE	MILITARY STANDARD
AF - 85 Other Cust Navy - AS		RELAYS, ELECTROMAGNETIC, 6PDT, 5 AMPERES, TYPE I, MAGNETIC LATCH, SOCKET MOUNTED, HERMETICALLY SEALED	MS25463
Procurement Specification MIL-R-6106		SUPERSEDES:	PAGE 2 OF 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:10Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army -
Navy - EC
Air Force - 11

User activities: Army -
Navy -
Air Force -

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Procurement Specification: MIL-R-6106

P.A: AF - 85
Other Cust: Navy - AS

International Interest:

SUPERSEDES:

TITLE: RELAYS, ELECTROMAGNETIC, 6PDT, 5 AMPERES, TYPE 1, MAGNETIC LATCH, SOCKET MOUNTED, HERMETICALLY SEALED

MILITARY STANDARD

MS25463

FED. SUP CLASS 5945

TABLE II. Operating characteristics.

MS part no. MS25463-	Coil data									Time - (milliseconds maximum)				
	Coil	Nominal			Max		Max pick-up voltage			Operate 3/	Release 4/	Contact bounce		
												Main		Aux
		Volts 1/	Freq. Hz	Res Ω	Volts	Amperes	Normal 2/	High temp test	Cont current test			NO	NC	NO NC
D1	X1, X2 Y1, Y2	28	dc		29	0.17	18	18	19.8	25	N/A	2	2	
A1	X1, X2 Y1, Y2	115	400 5/		122	0.07	90	90	95	25	N/A	2	2	

1/ CAUTION: Use of any coil voltage less than nominal coil voltage will compromise the operation of the relay.
2/ Over the temperature range.
3/ With nominal coil voltage.
4/ From nominal coil voltage.
5/ MS25463-A1 may be used on 60 Hz if maximum ambient temperature is limited to +85°C, maximum current coil will be 0.077 ampere.

APPROVED 1 Nov 1960 REVISED (G) ENTIRE STANDARD REVISED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:10Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army -
Navy - EC
Air Force - 11, 99

User activities: Army -
Navy -
Air Force -

TABLE III. Rated contact load (amperes per pole) (case grounded).

Type of load	Life operating cycles X 10^3	28 V dc				115 V ac, 1 phase				115/200 V ac, 3 phase 1/				See appropriate notes
		Main		Aux		Main		Aux		Main		Aux		
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz	
Resistive	100	5	5			5	4							
Inductive	100													
Inductive	20	3	3			3	2							
Motor	100	1.5	1.5			1.5	1							
Lamp	100	0.8	0.8			0.8	0.6							
Transfer load														2/
Mechanical life reduced current	400	1.25	1.25			1.25	1							
Intmd current		Applicable per specification												

1/ Absence of value indicates relay is not rated for 3 phase applications.
2/ Transfer load indicates relay suitable for transfer between unsynchronized ac power supplies at rating indicated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:10Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - Navy - EC Air Force - 11

User activities: Army - Navy - Air Force -

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. ☆U.S. GOVERNMENT PRINTING OFFICE: 1987 - 505-033-75924

P.A AF - 85 Other Cust Navy - AS

Procurement Specification MIL-R-6106

International interest

SUPERSEDES:

TITLE RELAYS, ELECTROMAGNETIC, 6PDT, 5 AMPERES, TYPE I, MAGNETIC LATCH, SOCKET MOUNTED, HERMETICALLY SEALED

MILITARY STANDARD

MS25463

PAGE 5 OF 5

FED. SUP CLASS 5945

Environmental characteristics

Temperature range	-70°C to +125°C
Max altitude rating	80,000 ft
Shock G-level	50 g's
Duration	11 ms
Max duration contact opening	10 µs
Vibration - Sinusoidal	
G-level	10 g's
Frequency range	5 - 1,500 Hz
Acceleration	15 g's

Quality conformance inspection

Performance of groups B and C tests are not applicable.

Electrical characteristics

Insulation resistance, initial	100 megohms
After life or environmental tests	50 megohms

Dielectric strength (sea level)

	Initial	After life tests
Coil to case	1,000 V rms	1,000 V rms
Aux contacts		
All other points	1,000 V rms	1,000 V rms

Dielectric strength (altitude) 1/

	80,000 ft
Coil to case	500 V rms
Aux contacts	
All other points	500 V rms

Max contact drop initial	0.150 volt
After life test	0.175 volt
Overload current	20 amperes
Rupture current	25 amperes
Duty rating	Continuous
RFI specification	MIL-STD-461

(Applicable to coil circuits of ac operated relays)

1/ When mounted in mating socket

APPROVED 1 Nov 1960 REVISED (G) ENTIRE STANDARD REVISED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:10Z
Check the source to verify that this is the current version before use.