


FED. SUP CLASS 5305

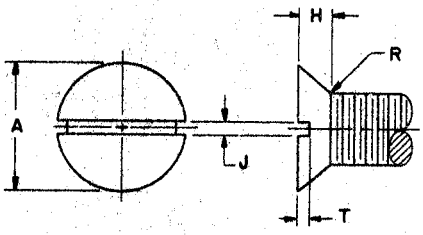

FULL HEAD





UNDERCUT HEAD

NOMINAL SIZE D			#0 (.0600)	#1 (.0730)	#2 (.0860)	#4 (.1120)	#6 (.1380)	#8 (.1640)	#10 (.1900)	1/4 (.2500)
THREADS PER INCH			80NF	72NF	64NF	48NF	40NF	36NF	32NF	28UNF
BODY DIAMETER D_E		MAX	.0600	.0730	.0860	.1120	.1380	.1640	.1900	.2500
		MIN	.0496	.0615	.0733	.0954	.1184	.1424	.1658	.2225
HEAD DIAMETER A		MAX SHARP	.119	.146	.172	.225	.279	.332	.385	.507
		MIN SHARP	.105	.130	.156	.207	.257	.308	.359	.477
		ABS MIN	.101	.126	.150	.200	.249	.300	.348	.462
SLOT WIDTH J		MAX	.023	.026	.031	.039	.048	.054	.060	.075
		MIN	.016	.019	.023	.031	.039	.045	.050	.064
FLAT	S	MAX	.002	.003	.003	.004	.005	.006	.007	.009
RADIUS	R	MAX	.025	.027	.031	.041	.050	.055	.062	.071
FULL HEAD — HEAD HEIGHT	H	MAX	.035	.043	.051	.067	.083	.100	.116	.153
		MIN	.026	.033	.040	.055	.069	.084	.098	.131
FULL HEAD — SLOT DEPTH	T	MAX	.015	.019	.023	.030	.038	.045	.053	.070
		MIN	.010	.012	.015	.020	.024	.029	.034	.046
UNDERCUT HEAD — HEAD HEIGHT	H_1	MAX	.026	.032	.037	.048	.060	.071	.083	.108
		MIN	.017	.022	.026	.036	.046	.055	.065	.086
UNDERCUT HEAD — SLOT DEPTH	T_1	MAX	.012	.016	.019	.025	.032	.037	.044	.058
		MIN	.010	.012	.015	.020	.024	.029	.034	.046

LENGTH L	TOLERANCE	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
THREADS SHALL EXTEND TO WITHIN 2 THREADS OF THE BEARING SURFACE OF THE HEAD, OR CLOSER IF PRACTICABLE.									
1/8	+0 -1/32	1	6	13	22	33	48		
3/16		2	7	14	23	34	49	67	
1/4		3	8	15	24	35	50	68	85
5/16		4	9	16	25	36	51	69	86
3/8		5	10	17	26	37	52	70	87
7/16			11	18	27	38	53	71	88
1/2			12	19	28	39	54	72	89
5/8				20	29	40	55	73	90
3/4				21	30	41	56	74	91
7/8					31	42	57	75	92
1					32	43	58	76	93
1-1/4	+0 -1/16					44	59	77	94
1-1/2						45	60	78	95
1-3/4						46	61	79	96
2						47	62	80	97
MINIMUM COMPLETE THREAD LENGTH OF 1-3/4.							63	81	98
2-1/4	+0 -3/32								
2-1/2							64	82	99
2-3/4							65	83	100
3							66	84	101

Ⓐ CANCELLED SEE SHEET 2

MATERIAL: CARBON STEEL, SPECIFICATION QQ-W-409 OR QQ-S-633, EXCEPT BESSEMER COMPOSITIONS; 55,000 PSI MINIMUM ULTIMATE TENSILE STRENGTH.

FINISH: CADMIUM OR ZINC PLATED, SPECIFICATION QQ-P-416, TYPE II, CLASS C OR SPECIFICATION QQ-Z-325, TYPE II, CLASS 3.

THREADS: THE THREADS SHALL BE IN ACCORDANCE WITH SCREW-THREAD STANDARDS FOR FEDERAL SERVICES HANDBOOK H-28.

NOTES:
(1) REFERENCED DOCUMENTS OF ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS SHALL APPLY.
(2) IN CASE OF CONFLICT WITH ANY REFERENCED DOCUMENT, THIS STANDARD WILL GOVERN.
(3) THE MS PART NUMBER CONSISTS OF THE MS SHEET NUMBER, PLUS THE DASH NUMBER. EXAMPLE: MS 35242-1.
(4) SIZES ABOVE DOTTED LINE HAVE UNDERCUT HEAD.
(5) ALL DIMENSIONS IN INCHES.

Ⓐ FOR CHANGES SEE SHEETS 1 AND 2.

APPROVED FEB 9, 1954 REVISED Ⓐ 5 APRIL 1962

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.	ORD
Other Cust	SHIPS

TITLE: SCREW, MACHINE, FLAT COUNTERSUNK HEAD, SLOTTED, CARBON STEEL, CADMIUM OR ZINC PLATED, NF-2A & UNF-2A

MILITARY STANDARD

MS 35242

PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET	OF
FF-S-92		1	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:12Z
Check the source to verify that this is the current version before use.

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

FED. SUP CLASS
5305

NOMINAL SIZE D			5/16 (.3125)	3/8 (.3750)	7/16 (.4375)	1/2 (.5000)	9/16 (.5625)	5/8 (.6250)	3/4 (.7500)
THREADS PER INCH			24UNF	24UNF	20UNF	20UNF	18UNF	18UNF	16UNF
BODY DIAMETER D_E		MAX	.3125	.3750	.4375	.5000	.5625	.6250	.7500
		MIN	.2806	.3430	.3995	.4619	.5205	.5828	.7029
HEAD DIAMETER A		MAX SHARP	.635	.762	.812	.875	1.000	1.125	1.375
		MIN SHARP	.600	.722	.771	.831	.950	1.069	1.306
		ABS MIN	.581	.700	.743	.802	.919	1.035	1.267
SLOT WIDTH J		MAX	.084	.094	.094	.106	.118	.133	.149
		MIN	.072	.081	.081	.091	.102	.116	.131
FLAT S		MAX	.011	.013	.016	.018	.020	.023	.027
RADIUS R		MAX	.083	.083	.100	.100	.110	.110	.125
FULL HEAD	HEAD HEIGHT H	MAX	.191	.230	.223	.223	.260	.298	.372
		MIN	.165	.200	.190	.186	.220	.253	.319
	SLOT DEPTH T	MAX	.088	.106	.103	.103	.120	.137	.171
		MIN	.058	.070	.066	.065	.077	.088	.111
UNDERCUT HEAD	HEAD HEIGHT H_1	MAX	.135	.162	.156	.160	.185	.212	.264
		MIN	.109	.132	.126	.123	.145	.167	.211
	SLOT DEPTH T_1	MAX	.073	.088	.085	.085	.100	.114	.142
		MIN	.058	.070	.066	.065	.077	.088	.111

THREADS SHALL EXTEND TO WITHIN 2 THREADS OF THE BEARING SURFACE OF THE HEAD, OR CLOSER IF PRACTICABLE.

MINIMUM COMPLETE THREAD LENGTH OF 1-3/4.

LENGTH L	TOLERANCE	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
1/8, 3/16, 1/4, 5/16, 3/8, 7/16, 1/2, 5/8, 3/4, 7/8, 1	+0 -1/32	102, 103, 104, 105, 106, 107, 108, 109	117, 118, 119, 120, 121, 122	130, 131, 132, 133, 134	142, 143, 144, 145	Ⓐ CANCELLED SEE NOTE		
1-1/4, 1-1/2, 1-3/4, 2	+0 -1/16	110, 111, 112, 113	123, 124, 125, 126	135, 136, 137, 138	146, 147, 148, 149	156, 157, 158, 159	166, 167, 168, 169	175, 176, 177, 178
2-1/4, 2-1/2, 2-3/4, 3	+0 -3/32	114, 115, 116	127, 128, 129	139, 140, 141	150, 151, 152	160, 161, 162	170, 171, 172	179, 180, 181

NOTE: FOR ILLUSTRATION, MATERIAL, FINISH, AND OTHER PERTINENT DATA SEE SHEET 1.

Ⓐ CANCELLED AFTER 7 May 1962 USE MS 35191. INTERCHANGEABILITY RELATIONSHIP-MS 35191 CAN REPLACE THE CANCELLED SCREWS OF THE SAME SIZE. THE CANCELLED MS 35242 CANNOT ALWAYS REPLACE MS 35191 AND SHOULD BE USED UNTIL EXISTING STOCK IS DEPLETED. THEN USE ONLY THE SUPERSEDING MS SCREWS OF THE SAME SIZE FOR DESIGN AND REPLACEMENT.

APPROVED FEB 9, 1954 REVISED Ⓐ FOR CHANGES SEE SHEETS 1 AND 2

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ORD
Other Cust SHIPS

TITLE
SCREW, MACHINE, FLAT COUNTERSUNK HEAD, SLOTTED, CARBON STEEL, CADMIUM OR ZINC PLATED, NF-2A & UNF-2A

MILITARY STANDARD
MS 35242

PROCUREMENT SPECIFICATION
FF-S-92

SUPERSEDES:

SHEET 2 OF

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T17:12Z
Check the source to verify that this is the current version before use.