
FED. SUP CLASS
2930

CHOKE-TYPE THERMOSTATS

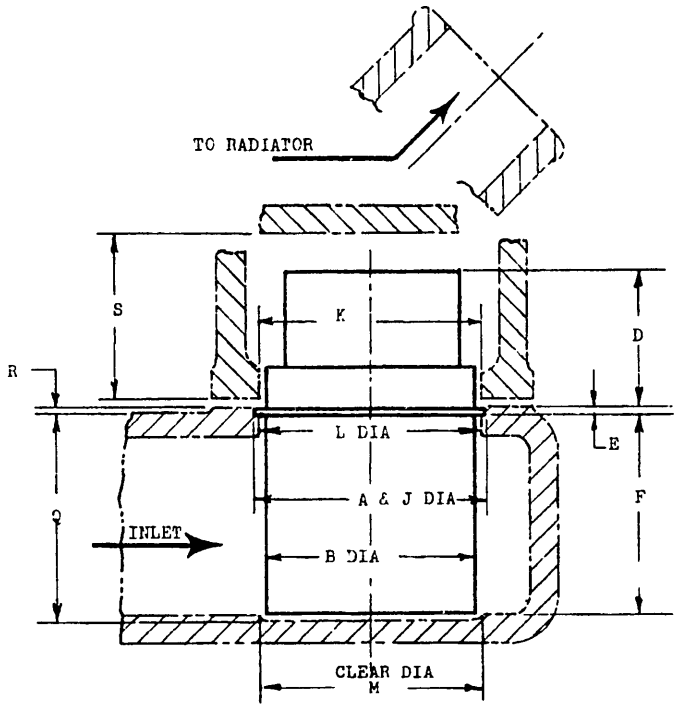

MS PART NO.	THERMOSTAT DIMENSIONS (INCHES)					FLOW RATE (GPM)[1]	
	A	B	D	E	F	OPEN	LEAK
MS 35770 - 1	2.130 2.115	1.900 MAX	1.250 MAX	*.050 .040	1.815 MAX	30-40	.30 MAX
MS 35770 - 2	2.510 2.480	2.100 MAX	1.750 MAX	*.050 .040	1.565 MAX	30-40	.30 MAX
MS 35770 - 3	2.880 2.870	2.630 MAX	1.750 MAX	.218 .213	2.940 MAX	75-100	.75 MAX

[1] IN STRAIGHT PIPE HAVING NO RESTRICTIONS AROUND THERMOSTAT ORIFICES. AT 4 PSI PRESSURE DIFFERENTIAL.

FOR MS PART NO.	POCKET DIMENSIONS (INCHES)						
	J	K	L	M	Q	R	S
MS 35770 - 1	2.150 2.140	1.970 1.950	1.969 1.906	1.938	1.875 MIN	.050 .040	1.500 MIN
MS 35770 - 2	2.540 2.520	2.130 2.110	2.188 2.125	2.156	1.625 MIN	.050 .040	2.000 MIN
MS 35770 - 3	2.900 2.890	2.660 2.640	2.719 2.656	-----	3.000 MIN	.213 .208	2.000 MIN

* .067 MAX IF ROLLED RIM IS USED.

'A'. FOR CHANGE SEE SHEET 3

APPROVED 30 DEC. 1957 REVISED (A) 4 OCTOBER 1961 (B) 27 APRIL 1987

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited. This military standard is approved for use by all Department and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.


P.A. ME Other Cust	TITLE THERMOSTATS, FLOW CONTROL, FOR 10 TO 500 H.P., LIQUID-COOLED INTERNAL COMBUSTION ENGINES	MILITARY STANDARD MS 35770
PROCUREMENT SPECIFICATION (B)	SUPERSEDES	SHEET 1 OF 4

DD FORM 1 SEP 87 672-1 (Coordinated)
PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
AMSC N/A
PROJECT 2930-A001

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
2930

BOTTOM BYPASS-TYPE THERMOSTATS

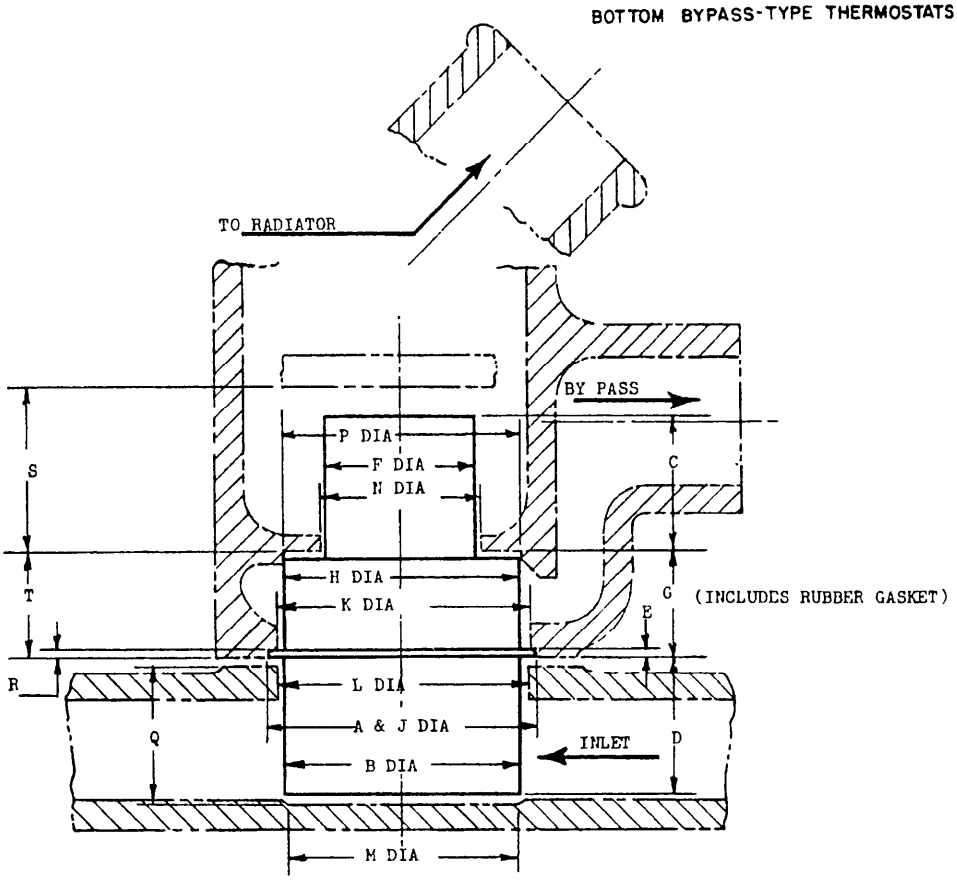

MS PART NO.	THERMOSTAT DIMENSIONS (INCHES)								FLOW RATE (GPM)[1]	
	A	B	C	D	E	F	G	H	OPEN	LEAK
MS 35770 - 6	2.565 2.520	2.250 MAX	1.000 MAX	1.130 MAX	.050 .025	1.820 MAX	*	2.348 MAX	30-40	.30 MAX
MS 35770 - 7	3.010 2.985	2.700 MAX	1.500 MAX	1.815 MAX	.130 .045	2.005 MAX	*	2.883 MAX	65-85	.65 MAX
MS 35770 - 8	3.550 3.520	3.300 MAX	1.500 MAX	1.830 MAX	.060 .045	2.245 MAX	*	3.368 MAX	70-90	.70 MAX

* MUST PROVIDE NOT LESS THAN 0.007 IN. COMPRESSION WHEN INSTALLED IN POCKET.

1 IN STRAIGHT PIPE HAVING NO RESTRICTIONS AROUND THERMOSTAT ORIFICES. AT 4 PSI PRESSURE DIFFERENTIAL.

FOR MS PART NO.	POCKET DIMENSIONS (INCHES)									
	J	K	L	M	N	P	Q	R	S	T
MS 35770 - 6	2.595 2.575	2.360 2.350	2.313 2.250	2.250	1.845 1.835	2.360 2.350	1.313 MIN	.050 .040	1.500 MIN	1.005 .995
MS 35770 - 7	3.040 3.020	2.905 2.885	2.781 2.720	2.750	2.035 2.015	2.905 2.885	1.875 MIN	.130 .110	1.750 MIN	1.610 1.605
MS 35770 - 8	3.560 3.580	3.390 3.370	3.406 3.344	3.375	2.270 2.250	3.390 3.370	1.860 MIN	.060 .050	1.750 MIN	1.130 1.120

APPROVED 30 DEC. 1957 REVISED (A) FOR CHANGE SEE SHEET 3 (B) FOR CHANGE SEE SHEET 4


This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ME Other Cust	TITLE THERMOSTATS, FLOW CONTROL, FOR 10 TO 500 H.P., LIQUID-COOLED INTERNAL COMBUSTION ENGINES	MILITARY STANDARD MS 35770
PROCUREMENT SPECIFICATION (B)	SUPERSEDES	SHEET 2

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

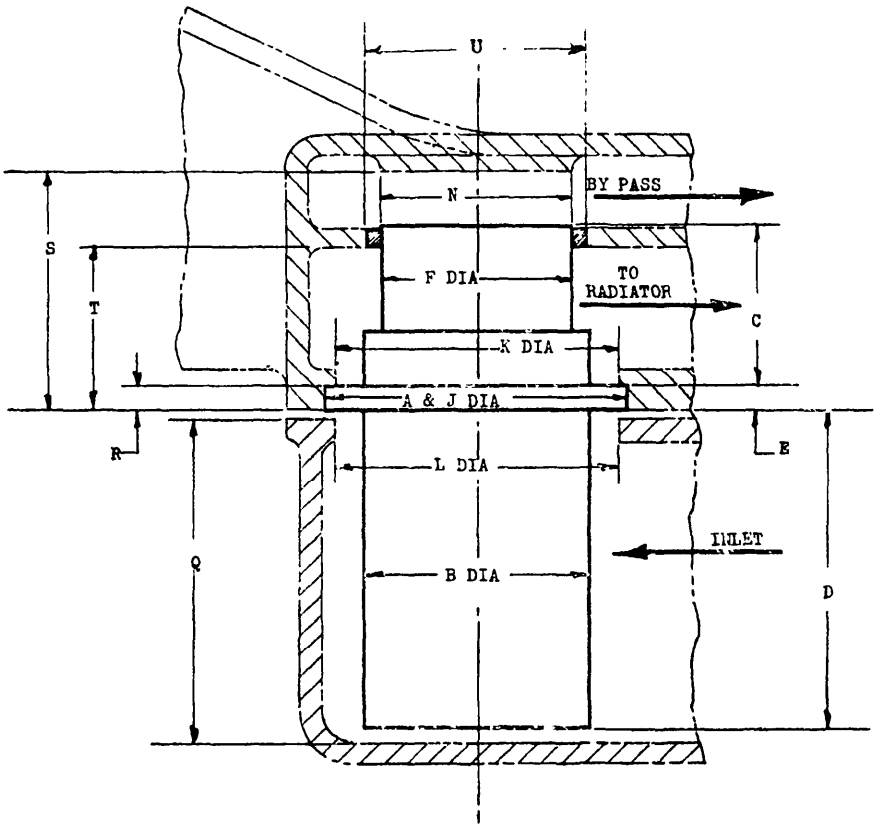

TOP BYPASS-TYPE THERMOSTATS

MS PART NO.	THERMOSTAT DIMENSIONS (INCHES)						FLOW RATE(GPM)[1]	
	A	B	C	D	E	F	OPEN	LEAK
MS 35770 - 9	2.467 2.457	1.945 Max	1.400 Min	1.813 Max	.129 .124	1.616 1.606	55-80	.55 Max
MS 35770 - 10	2.880 2.870	2.630 Max	1.500 Min	3.190 Max	.218 .213	2.270 2.280	85-110	.85 Max

1 IN STRAIGHT PIPE HAVING NO RESTRICTIONS AROUND THERMOSTAT ORIFICES. AT 4 PSI PRESSURE DIFFERENTIAL.

* RADIATOR PASSAGE

FOR MS PART NO.	POCKET DIMENSIONS (INCHES)							
	J	K	L	N	Q	R	S	T
MS 35770 - 9	2.487 2.477	2.060 2.030	2.306 2.244	1.623 1.620	1.873 Min	.124 .119	1.973 1.963	1.225 1.205
MS 35770 - 10	2.900 2.890	2.645 2.635	2.719 2.656	2.287 2.284	3.250 Min	.213 .208	2.205 2.195	1.410 1.390

NOTE: DIAMETERS U, J AND K TO BE CONCENTRIC WITHIN .005 TIR

APPROVED 30 DEC. 1957 REVISED (A) FOR CHANGE SEE SHEET 3 (B) FOR CHANGE SEE SHEET 4

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ME Other Cust	TITLE THERMOSTATS, FLOW CONTROL, FOR 10 TO 500 H.P., LIQUID-COOLED INTERNAL COMBUSTION ENGINES	MILITARY STANDARD MS 35770
PROCUREMENT SPECIFICATION (B)	SUPERSEDES	SHEET 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2930

NOTES:

1. MATERIAL:

(B) WITHSTAND CONTINUOUS IMMERSION IN WATER AND ANTI-FREEZE COMPOUNDS (MIL-A-11755) WITHOUT CHANGE TO FUNCTIONAL CHARACTERISTICS.

2. FUNCTIONAL CHARACTERISTICS:

A.	NOMINAL RATING	180° F
B.	START TO OPEN	177° - 182° F
C.	FULL OPEN	205° F AND ATMOSPHERIC PRESSURE (0 PSIG)
		226° F AND 7 PSIG

D. WITHSTAND ANY COMBINATION OF FOLLOWING WITHOUT CHANGE TO FUNCTIONAL CHARACTERISTICS.

TEMPERATURE	-80° F to + 230° F
PRESSURE	2.5 PSIA to 15 PSIG

3. VENT HOLE: 0.050 - 0.060 INCH DIAMETER, NO CHECK DEVICE.

4. MARKING: MIL-STD-130; "180°" AND MS NO. STAMPED ON UNIT.

5. HOUSING GASKET 1/32 MIN (NOT TO BE FURNISHED WITH THERMOSTAT).

6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.

7. THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

APPROVED 30 DEC. 1957 REVISED (A) FOR CHANGE SEE SHEET 3 (B) FOR CHANGE SEE SHEET 4

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P.A. ME Other Cust	TITLE THERMOSTATS, FLOW CONTROL, FOR 10 TO 500 H.P., LIQUID-COOLED INTERNAL COMBUSTION ENGINES	MILITARY STANDARD MS35770
PROCUREMENT SPECIFICATION (B)	SUPERSEDES	SHEET 4

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.