
FED. SUP CLASS
5310

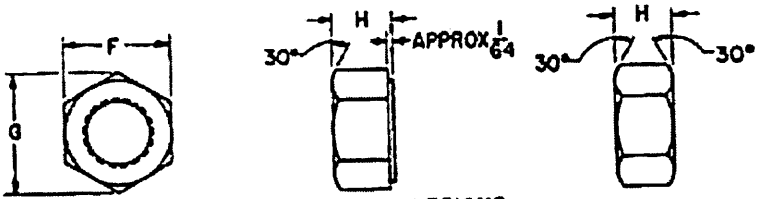

ACCEPTABLE DESIGNS

TABLE I

NOMINAL SIZE OR BASIC MAJOR DIAMETER OF THREAD		1/4 .2500	5/16 .3125	3/8 .3750	7/16 .4375	1/2 .5000	9/16 .5625	5/8 .6250
THREADS PER INCH		28	24	24	20	20	18	18
F WIDTH ACROSS FLATS	NOM.	7/16	1/2	9/16	11/16	3/4	7/8	15/16
	MAX.	.4375	.5000	.5625	.6875	.7500	.8750	.9375
	MIN.	.4280	.4890	.5510	.6750	.7360	.8610	.9220
G WIDTH ACROSS CORNERS	MAX.	.505	.577	.650	.794	.866	1.010	1.083
	MIN.	.488	.557	.628	.768	.840	.982	1.051
H THICKNESS	NOM.	7/32	17/64	21/64	3/8	7/16	31/64	35/64
	MAX.	.226	.273	.337	.385	.448	.496	.559
	MIN.	.212	.259	.320	.365	.427	.473	.535
MATERIAL		DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
STEEL, CARBON GRADE * A		~~1~~	~~4~~	~~7~~	~~10~~	~~13~~	~~16~~	~~19~~
B		2	5	8	11	14	17	20
C		3	6	9	12	15	18	21

NOMINAL SIZE OR BASIC MAJOR DIAMETER OF THREAD		3/4 .7500	7/8 .8750	1 1.0000	1-1/8 1.1250	1-1/4 1.2500	1-3/8 1.3750	1-1/2 1.5000
THREADS PER INCH		16	14	12	12	12	12	12
F WIDTH ACROSS FLATS	NOM.	1-1/8	1-5/16	1-1/2	1-11/16	1-7/8	2-1/16	2-1/4
	MAX.	1.1250	1.3125	1.5000	1.6875	1.8750	2.0625	2.2500
	MIN.	1.0890	1.2690	1.4500	1.6320	1.8120	1.9940	2.1750
G WIDTH ACROSS CORNERS	MAX.	1.299	1.516	1.732	1.949	2.165	2.382	2.598
	MIN.	1.240	1.447	1.653	1.859	2.066	2.273	2.480
H THICKNESS	NOM.	41/64	3/4	55/64	31/32	1-1/16	1-11/64	1-9/32
	MAX.	.665	.776	.887	.999	1.094	1.206	1.317
	MIN.	.617	.724	.831	.939	1.030	1.138	1.245
MATERIAL		DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
STEEL, CARBON GRADE * A		~~22~~	~~25~~	~~28~~	~~31~~	~~34~~	~~37~~	~~40~~
B		23	26	29	32	35	38	41
C		24	27	30	33	36	39	42

NOTE: For material, protective coating, and other pertinent data, see sheet 2.

* CANCELLED, See Table II.

Ⓒ For changes see sheet 3

REVIEWER: AT, AV, CL, IS, MD, MC, NSA
USER: EL, MC, ME, YD, OS, SH

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 20 JAN 1964 REVISED (A) 10 APR 64 (B) 8 SEPT 1966 (C) 30 MAR 1970

P.A. WC
Other Cust
S2

TITLE
NUT, PLAIN, HEXAGON - CARBON STEEL, CADMIUM PLATED, UNF-2B (IN./MM)

MILITARY STANDARD
MS51968

PROCUREMENT SPECIFICATION
FF-N-836

SUPERSEDES:
MS35690 in part

SHEET 1 OF 3

DD FORM 672-1 (Commercial)

Source: https://assist.dla.mil -- Downloaded: 202640-23T18:15Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5310

MATERIAL: Steel, Carbon, Grades A, B or C, in accordance with procurement specification. Finished nuts shall meet the required proof loads as specified in the procurement specification.

PROTECTIVE COATING: Cadmium plate in accordance with procurement specification.

THREADS: Threads shall be in accordance with Screw-Thread Standards for Federal Services, Handbook H-28.

DIMENSIONS: All dimensions are in inches unless otherwise specified.

PART NUMBER: The MS part number consists of the MS number, plus dash number. Example: MS51968-2.

NOTES: (1) Reference documents shall be of the issue in effect on date of invitations for bid.

(2) For design feature purposes, this standard takes precedence over procurement documents referenced herein.

REVIEWER: AT, AV, GL, IS, MU, NU, NSA
USER: EL, MC ME, YD, OS, SH

INTERCHANGEABILITY TABLE

The nuts covered by the following dash numbers given in MS35690 are cancelled after 30 September 1965, as given on that document. The nuts covered by the following cancelled dash numbers given in MS51968 are cancelled after 8 SEP 1966. The cancelled nuts cannot always replace the new nuts and should be used until existing stocks are depleted. Use only the new nuts for design and replacement. Replacement shall be in accordance with Table II.

TABLE II

PART NUMBER			PART NUMBER			PART NUMBER		
CANCELLED MS35690	CANCELLED MS51968	NEW MS51968	CANCELLED MS35690	CANCELLED MS51968	NEW MS51968	CANCELLED MS35690	CANCELLED MS51968	NEW MS51968
DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
	1	2		16	17		31	32
422		2	922		17	1922		32
423		2	923		17	1923		32
425		2	925		17	1925		32
426		2	926		17	1926		32
428		3	928		18	1928		33
429		3	929		18	1929		33
	4	5		19	20		34	35
522		5	1022		20	2022		35
523		5	1023		20	2023		35
525		5	1025		20	2025		35
526		5	1026		20	2026		35
528		6	1028		21	2028		36
529		6	1029		21	2029		36
	7	8		22	23		37	38
622		8	1222		23	2222		38
623		8	1223		23	2223		38
625		8	1225		23	2225		38
626		8	1226		23	2226		38
628		9	1228		24	2228		39
629		9	1229		24	2229		39
	10	11		25	26		40	41
722		11	1422		26	2422		41
723		11	1423		26	2423		41
725		11	1425		26	2425		41
726		11	1426		26	2426		41
728		12	1428		27	2428		42
729		12	1429		27	2429		42
	13	14		28	29			
822		14	1622		29			
823		14	1623		29			
825		14	1625		29			
826		14	1626		29			
828		15	1628		30			
829		15	1629		30			


APPROVED 20 JAN 1964 REVISED (A) 10 APR 1964 (B) 8 SEP 1966 (C) FOR CHANGES SEE SHEET 3

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC Other Cust 82	TITLE NUT, PLAIN, HEXAGON - CARBON STEEL, CADMIUM PLATED, UNF-2B (IN./MM)	MILITARY STANDARD MS 51968
PROCUREMENT SPECIFICATION FF-N-836	SUPERSEDES: MS35690 in part	SHEET 2 OF

DD FORM 672-1 (Continued)

Source: https://assist.dla.mil -- Downloaded: 202640-23T18:15Z
Check the source to verify that this is the current version before use.

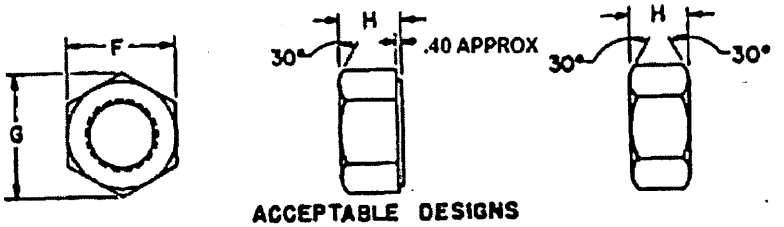

ACCEPTABLE DESIGNS

TABLE III
METRIC TRANSLATION OF TABLE I

	NOMINAL SIZE	INCH	1/4	5/16	3/8	7/16	1/2	9/16	5/8
		MM	6.350	7.938	9.525	11.112	12.700	14.288	15.875
	THREADS PER 25.4 MM		28	24	24	20	20	18	18
F	WIDTH ACROSS FLATS	NOM	11.112	12.700	14.288	17.462	19.050	22.225	23.812
		MAX	11.112	12.700	14.288	17.462	19.050	22.225	23.812
		MIN	10.871	12.421	13.995	17.145	18.694	21.869	23.419
G	WIDTH CORNERS	MAX	12.827	14.656	16.510	20.168	21.996	25.654	27.508
		MIN	12.395	14.148	15.951	19.507	21.336	25.943	26.695
H	THICKNESS	NOM	5.556	6.747	8.334	9.525	11.112	12.303	13.891
		MAX	5.740	6.934	8.560	9.779	11.379	12.598	14.199
		MIN	5.385	6.553	8.128	9.271	10.846	12.014	13.589
	MATERIAL		DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
	GRADE B		2	5	8	11	14	17	20
	GRADE C		3	6	9	12	15	18	21

	NOMINAL SIZE	INCH	3/4	7/8	1	1-1/8	1-1/4	1-3/8	1-1/2
		MM	19.050	22.225	25.400	28.575	31.750	34.925	38.100
	THREADS PER 25.4 MM		16	14	12	12	12	12	12
F	WIDTH ACROSS FLATS	NOM	28.575	33.338	38.100	42.862	47.625	52.388	57.150
		MAX	28.575	33.338	38.100	42.862	47.625	52.388	57.150
		MIN	27.635	32.233	36.830	41.427	46.025	50.648	55.245
G	WIDTH CORNERS	MAX	32.995	38.506	43.993	49.505	54.991	60.503	65.989
		MIN	31.496	36.754	41.986	47.219	52.476	57.734	62.992
H	THICKNESS	NOM	16.272	19.050	21.828	24.606	26.988	29.767	32.538
		MAX	16.891	19.710	22.530	25.375	27.788	30.632	33.452
		MIN	15.672	18.390	21.107	23.851	26.162	28.905	31.623
	MATERIAL		DASH NO.	DASH NO	DASH NO	DASH NO	DASH NO	DASH NO	DASH NO
	GRADE B		21	26	29	32	35	38	41
	GRADE C		24	27	30	33	36	39	42

NOTE:

All dimensions are in millimeters, unless otherwise specified.

(C) SHEET 3 ADDED

APPROVED 20 JAN 1964 REVISED (C) FOR CHANGES SEE SHEET 3

REVIEWER: AT, AV, CL, IS, MI, ME, NSA
USER: EL, MC ME, YD, OS, SH

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC Other Cust 82	TITLE NUT, PLAIN, HEXAGON - CARBON STEEL, CADMIUM PLATED, UNF-2B (IN./MM)	MILITARY STANDARD MS51968	
PROCUREMENT SPECIFICATION FF-N-836	SUPERSEDES: MS35690 in part	SHEET 3 OF	

DD FORM 672-1 (Continued)

Source: https://assist.dla.mil -- Downloaded: 202610-23T18:15Z
Check the source to verify that this is the current version before use.