INCH-POUND

MIL-DTL-83502/5D
w/AMENDMENT 1
10 January 2014
SUPERSEDING
MIL-DTL-83502/5D
10 February 2004

DETAIL SPECIFICATION SHEET

SOCKETS PLUG-IN ELECTRONIC COMPONENTS, ROUND STYLE
(R052)

This specification is approved for use by all
Departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the MIL-DTL-83502.


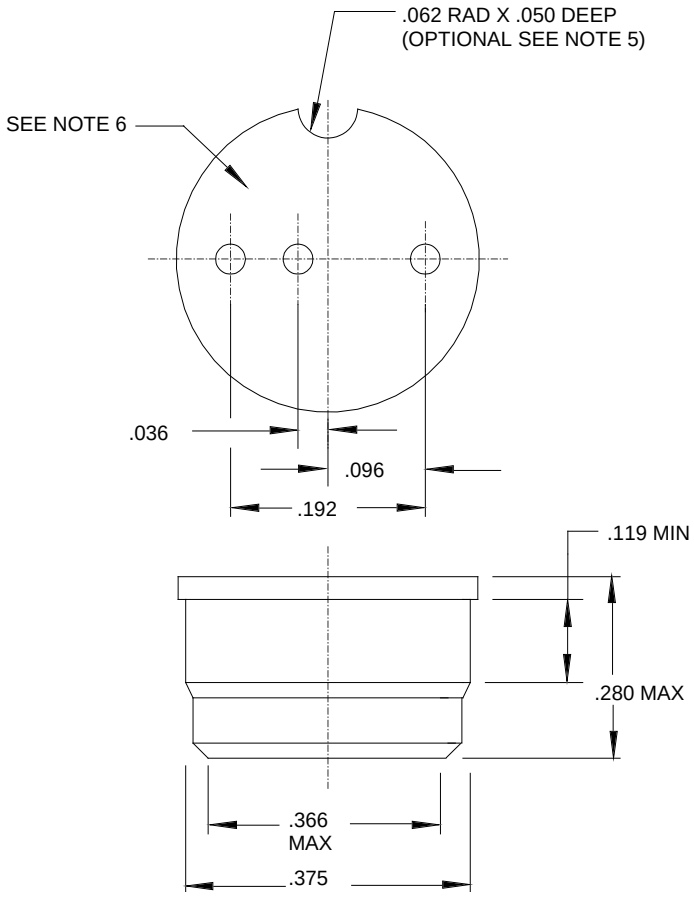


FIGURE 1. Dimensions and configurations.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:19Z
Check the source to verify that this is the current version before use.

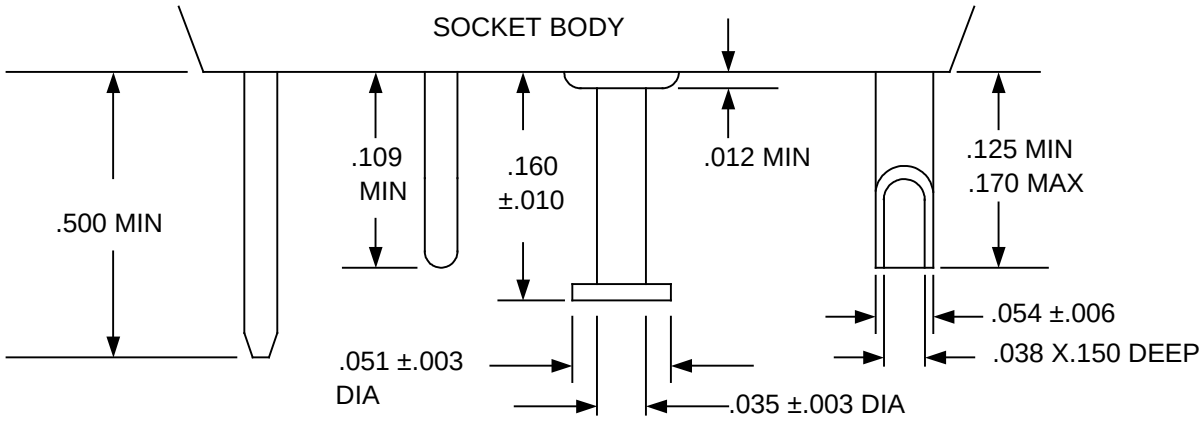

TERMINATION STYLES, TYPE I, TYPE II, TYPE III, TYPE IV.

TERMINAL DIMENSION

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.036	0.91	.096	2.44	.192	4.88
.006	0.15	.038	0.97	.109	2.77	.200	5.08
.010	0.25	.050	1.27	.119	3.02	.280	7.11
.012	0.30	.051	1.30	.125	3.18	.366	9.30
.015	0.38	.054	1.37	.140	3.56	.370	9.40
.017	0.43	.057	1.45	.150	3.81	.375	9.52
.025	0.64	.06	1.5	.160	4.06	.406	10.31
.035	0.89	.062	1.57	.170	4.32	.500	12.70

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. Device to accept leads: .016 to .020 inch (0.41 to 0.51 mm) diameter x .190 ±.030 inch (4.83 ±0.76 mm). Contact shall be made at or before reaching a depth of .100 inch (2.54 mm).
5. A visual polarization index to be provided.
6. All other marking shall be on the package.
7. Recommended mounting hole .366/.369 inch (9.30/9.37 mm).

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:19Z
Check the source to verify that this is the current version before use.

TABLE I. Termination style.

Dash number	Termination style
-003	Wire wrapping post, type I
-011	Printed circuit, type II
-013	Turrent, type III
-015	Solder pocket, type IV

REQUIREMENTS:

Dimensions and configurations: See figure 1 and table I

Termination styles: Type I, type II, type III, and type IV (see table I).

Mounting: See figure 1.

Temperature rating: +125°C.

Reference material: See MIL-DTL-83502.

Body: Shall be TFE-fluorocarbon rod in accordance with ASTM D1710.

Contact: Beryllium copper in accordance with ASTM B139/B139M, ASTM B194, ASTM B103/B103M, or UNS C729000 spinodal alloy in accordance with ASTM B740.

Contact and sleeve finish: Gold over nickel in accordance with MIL-DTL-83502.

Terminal: Brass in accordance with ASTM B16/B16M.


Mating force: 4.0 pounds (1.81 kg) maximum.

Retention force: 3.0 pounds (1.36 kg) minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:19Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN): The PIN shall consist of the M prefix letter, basic specification number, number of this specification sheet, and the dash number from table I.

Example:

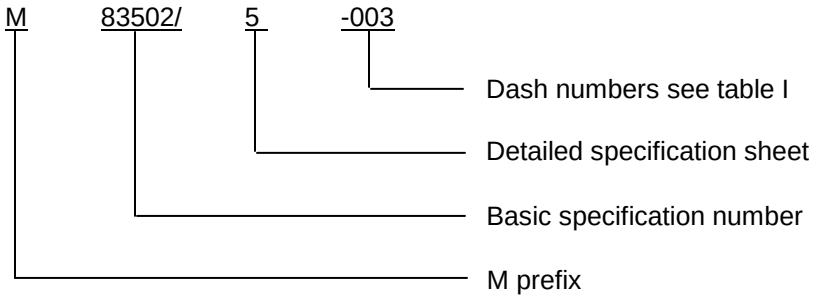

Supersession data: See table II.TABLE II. Supersession data.

Old part number M83502	Superseded by M83502
/5-011 /5-013 /5-015	/2-010 /2-011 /2-012

The Government PIN, specified in table III, supersedes the following commercial PIN.

TABLE III. Supersession and cross reference data.

Active Government PIN	CAGE 91506	CAGE 00779
M83502/5-003 M83502/5-011 M83502/5-013 M83502/5-015	8058-43G1 8058-1G33 --- 8058-1G18	--- 7-1437508-6 --- ---

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:19Z
Check the source to verify that this is the current version before use.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-83502, this document references the following:

ASTM B16/B16M
ASTM B103/B103M
ASTM B139/B139M
ASTM B194
ASTM B740
ASTM D1710
UNS C729000

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2013-182)

Review activities:
Army - AR, AT, AV, CR4, MI
Navy - AS, MC, SH
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online data at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:19Z
Check the source to verify that this is the current version before use.