
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, FLAT CABLE, NONENVIRONMENTAL, SOCKET INSULATION DISPLACEMENT

This specification sheet is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the socket connectors described herein shall consist of this specification sheet and the latest issue of MIL-C-83503(USAF).

THESE CONNECTORS ARE NOT INTENDED FOR AIRBORNE APPLICATIONS

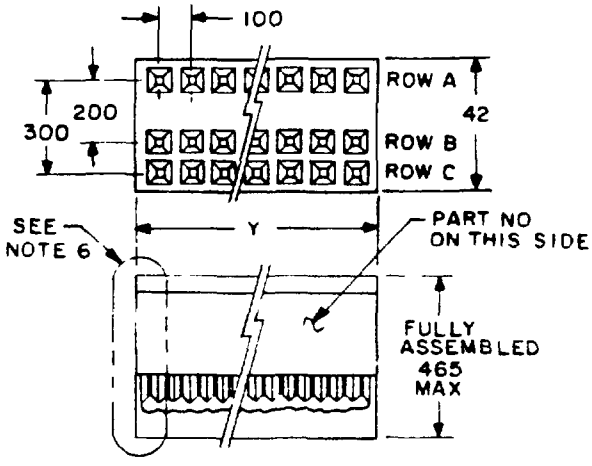

INCHES	MM
.020	0.51
.050	1.27
.100	2.54
.200	5 08
.300	7.62
.420	10.67
.465	11.81
.470	11 94
.750	19.05
.850	21 59


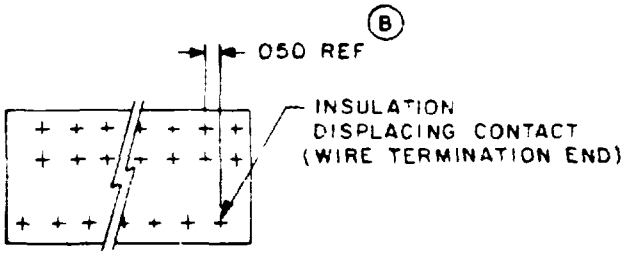


FIGURE 1. Dimensions and configuration.

(B) denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:21Z
Check the source to verify that this is the current version before use.

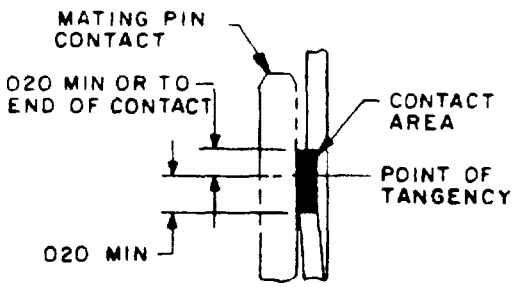

FINISH LOCALIZATION AREA

Part number and characteristics.

Part No.	'Y'	Size	Loaded Rows	No. Contacts
M38503/22-01 M83503/22-02	.750 (19.05) .750 (19.05)	2 X 7 2 X 7	A and C A and B	14 14
M83503/22-03 M83503/22-04	.850 (21.59) .850 (21.59)	2 X 8 2 X 8	A and C A and B	16 16
M83503/22-05	.750 (19.05)	3 X 7	A, B and C	21
M83503/22-06	.850 (21.59)	3 X 8	A, B and C	24

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerances are ± 005 (0.13 mm) for three place decimals and ±.01 (0.3 mm) for two place decimals.
4. Rows B and C have a common conductor.
5. Interface minimum post .21 (5.3 mm) engagement length, interface Round conductor flat cable to .100 inch x .100 inch (2.54 x 2.54 mm) spaced, 025 inch (0.64 mm) square post, 240 (6.10 mm) minimum.
6. Method of connection of cover to body optional but shall meet the requirements of MIL-C-83503 and this specification sheet.
7. Unused (unloaded) holes optional.

FIGURE 1. Dimensions and configuration - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction

Dimensions and configuration See figure 1.

Temperature range -55°C to +120°C

Current rating 1 ampere.

Materials

Contacts Beryllium copper (per QQ-C-530 or QQ-C-533) or phosphor bronze (per QQ-B-750) with gold plating in contact area.

Housing Glass filled nylon per MIL-M-20693 or MIL-M-19887, diallylphthalate, type SDG-F per MIL-M-14; or glass filled polyester per MIL-M-24519.

Wire accommodation 28 AWG stranded, .050 spacing between conductor centers.

Voltage rating 300 V rms.

Dielectric withstanding voltage (at sea level) 500 V rms, minimum.

Test wire size 28 AWG stranded.

Contact retention Not applicable.

Contact resistance. Initial 50 milliohms, after testing 50 milliohms per MIL-STD-1344, method 3004.

Part number M83503/22-(dash number from figure 1)

Interface Round conductor flat cable, .050 centers, to .025 in. round or square posts.

Assembly tool M22520/32

Polarization Not required.

Marking Part number shall be marked on connector with an ink stamp or molded raised letters (see figure 1)

Accessories 301 stainless steel or other materials per MIL-C-83503.

Custodian
Air Force - 85

Review activities
Air Force - 11, 99, 17
DLA - ES

Agent
DLA - ES

Preparing activity
Air Force - 85

(Project 5935-F245-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:21Z
Check the source to verify that this is the current version before use.