INCH-POUND
MIL-DTL-83503/25B
17 June 1998
SUPERSEDING
MIL-C-83503/25A
1 July 1983

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, FLAT CABLE, NONENVIRONMENTAL FOUR WALL HEADER, STRAIGHT THRU (.100SPACING) WITH POLARIZING FEATURE, SOLDERLESS WRAP POST OR PWB TERMINATION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-DTL-83503.


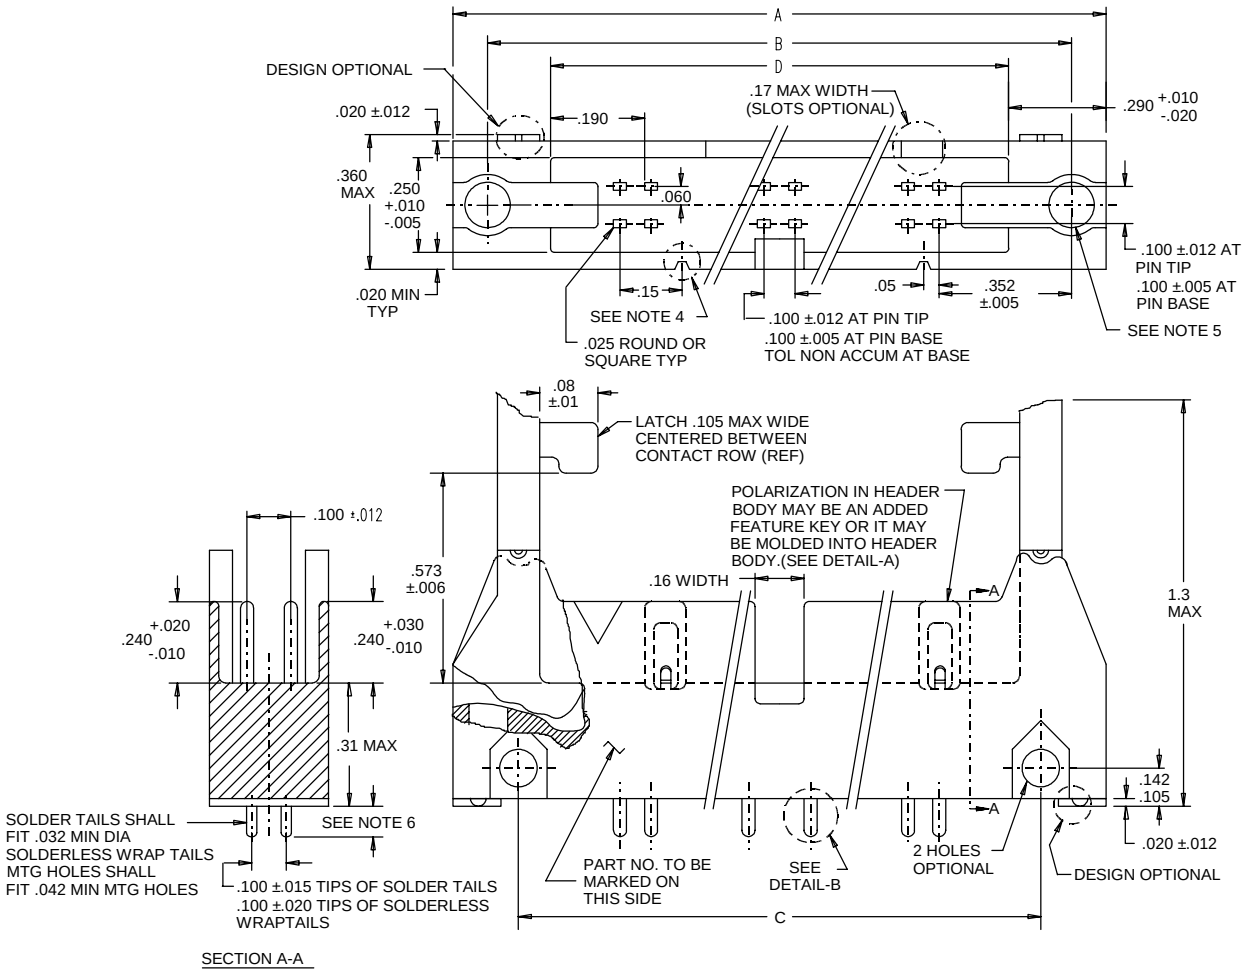



Figure 1. Dimensions and configuration.

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:21Z
Check the source to verify that this is the current version before use.

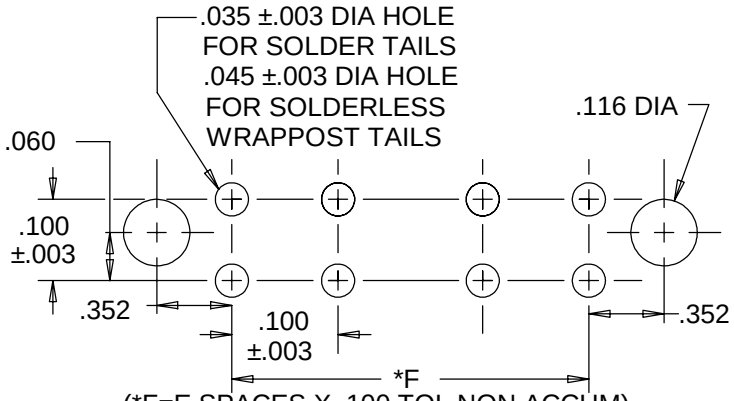

(*F=E SPACES X .100 TOL NON ACCUM)
RECOMMENDED MOUNTING HOLE PATTERN

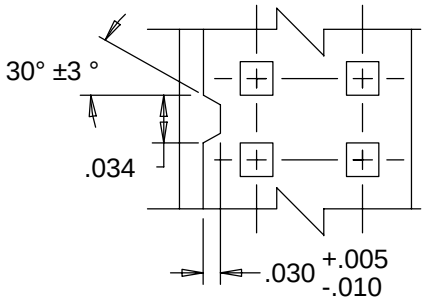

POLARIZATION DETAIL
DETAIL-A

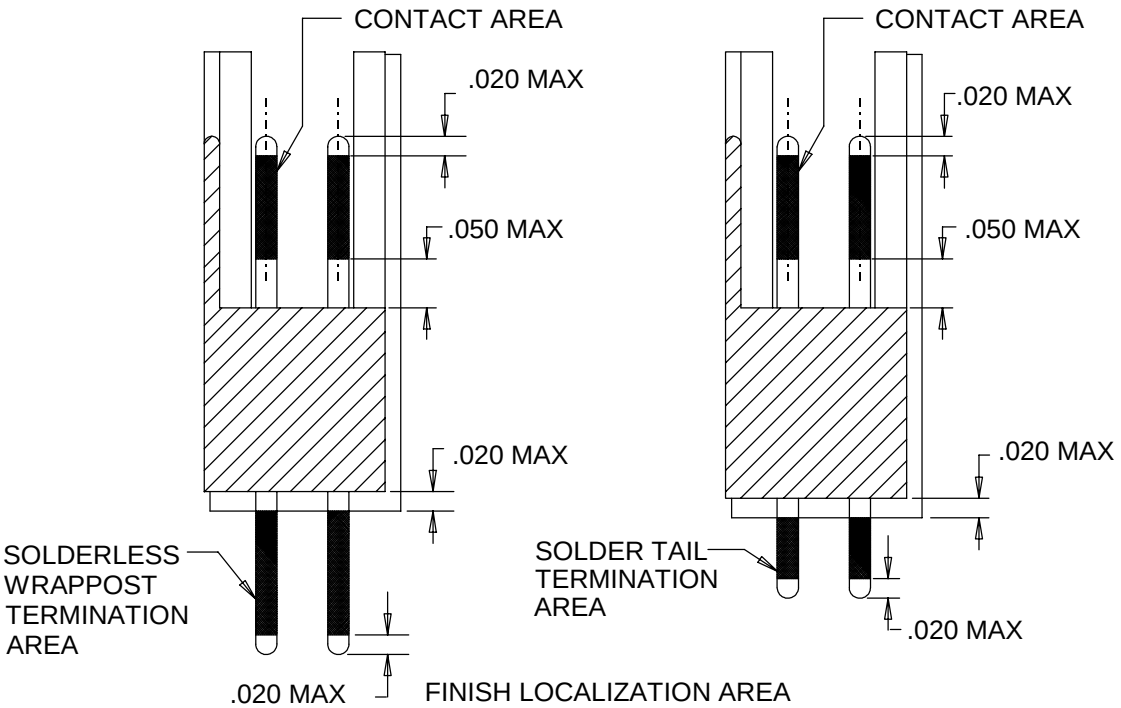

DETAIL-B

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:21Z
Check the source to verify that this is the current version before use.

Inch	mm	Inch	mm	Inch	mm	Inch	mm
.003	0.08	.030	0.76	.089	2.26	.190	4.83
.005	0.13	.034	0.86	.100	2.54	.240	6.10
.006	0.15	.035	0.89	.105	2.67	.250	6.35
.010	0.25	.045	1.14	.116	2.95	.290	7.37
.01	0.3	.05	1.3	.125	3.18	.31	7.9
.012	0.30	.050	1.27	.15	3.8	.352	8.94
.015	0.38	.060	1.52	.152	3.86	.360	9.14
.020	0.51	.062	1.57	.17	4.3	.573	14.55
.025	0.64	.08	2.0	.178	4.52	.610	15.49
						1.3	33.0

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 0.25 mm.
3. Unless otherwise specified tolerances are ± .005 (0.13 mm) inch for three place decimals and ± .01 (0.3 mm) inch for two place decimals.
4. The polarizing feature on this end is non-existent on the 10 and 14 position connectors.
5. Two thread cutting screws, No. 4-24 (1/4 (6.35 mm) inch length) type BG are provided.
6. For .062 PWB pin length shall be .089 (2.26 mm) minimum and .178 (4.52 mm) maximum, for .125 (3.18 mm) PWB, pin length shall be .152 (3.86 mm) minimum and .178 (4.52 mm) maximum and for solderless wrap post, pin length shall be .610 ± .015 (15.49 ± 0.38 mm) inch.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:21Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and characteristics

Dash Number	No. of pins	Dimensions 1/						Termination, right angle contact type
		A (mm)	B (mm)	C (mm)	D (mm) +.030 (0.76) -.000	E (mm)	F (mm)	
-01	10	1.26 (32.0)	1.10 (27.9)	.86 (21.84)	.690 (17.53)	4	.400 (10.16)	.062 PWB
-02	10							.125 PWB
-03	10							Wrap post
-04	14	1.46 (37.1)	1.30 (33.0)	1.06 (26.92)	.890 (21.34)	6	.600 (15.24)	.062 PWB
-05	14							.125 PWB
-06	14							Wrap post
-07	16	1.56 (39.6)	1.40 (35.6)	1.16 (29.46)	.990 (25.15)	7	.700 (17.78)	.062 PWB
-08	16							.125 PWB
-09	16							Wrap post
-10	20	1.76 (44.7)	1.60 (40.6)	1.36 (34.54)	1.190 (30.23)	9	.900 (22.86)	.062 PWB
-11	20							.125 PWB
-12	20							Wrap post
-13	26	2.06 (52.3)	1.90 (48.3)	1.66 (42.16)	1.490 (37.85)	12	1.200 (30.48	.062 PWB
-14	26							.125 PWB
-15	26							Wrap post
-16	34	2.46 (62.5)	2.30 (58.4)	2.06 (52.32)	1.890 (48.01)	16	1.600 (40.64)	.062 PWB
-17	34							.125 PWB
-18	34							Wrap post
-19	40	2.76 (70.1	2.60 (66.0)	2.36 (59.94)	2.190 (55.63)	19	1.900 (48.26)	.062 PWB
-20	40							.125 PWB
-21	40							Wrap post
-22	50	3.26 (82.8)	3.10 (78.7)	2.86 (72.64)	2.690 (68.33)	24	2.400 (60.96)	.062 PWB
-23	50							.125 PWB
-24	50							Wrap post
-25	60	3.76 (95.5)	3.60 (91.4)	3.36 (85.34)	3.190 (81.03)	29	2.900 (73.66)	.062 PWB
-26	60							.125 PWB
-27	60							Wrap post
-28	64	3.96 (100.6)	3.80 (96.5)	3.56 (90.42)	3.390 (86.11)	31	3.100 (78.74)	.062 PWB
-29	64							.125 PWB
-30	64							Wrap post

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configurations: See figure 1 and table I.

Temperature range: -55° to +120°C.

Voltage rating: 300 V rms.

Current rating: 1 ampere.

Materials:

Contacts: Phosphor bronze or brass per CDA260, or spring temper; or copper alloy CA-725 per ASTM-B-122.

Contact plating:
Contact area: Gold, per MIL-DTL-83503.
Solderless wrap post terminal area: Per MIL-STD-1130.
Solder tail termination area: Gold , or tin-lead, per MIL-DTL-83503.

Housing: Glass field polyester per ASTM PS 2, type GPT-15F, GPT-20F, GPT-30F, or an equivalent industry standard.

Accessories: Parts may be constructed of polyester per ASTM PS 2 or other materials specified in MIL-DTL-83503, provided these parts do not come in contact with current carrying components.

Polarization key: Shall be permanently attached to header (added feature key shall be bonded to header).

Mating connector : see MIL-DTL-83503/7.

Solderless wrap post contacts: Geometry parallelism and tip configuration shall be in accordance with MIL-STD-1130.

Solderless wrap post contact wire accommodation: 26 or 28 AWG solid.

Dielectric withstanding voltage

(at sea level) : 500 V rms, minimum.

(at altitude): 200 V rms, minimum.

Cable retention: Not applicable.

Contact retention. Not applicable

Connector-cable flexing: Not applicable.

Contact resistance: 50 milliohms maximum.


Latch retention: The latch shall retain the mating connector when the cable retention force is applied to the mating connector cable. The latch shall also function as an ejector to eject mating connector.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:21Z
Check the source to verify that this is the current version before use.

Marking:

Part or identifying number (PIN): The PINshall consist of this specification sheet and the dash number from table I.

Example

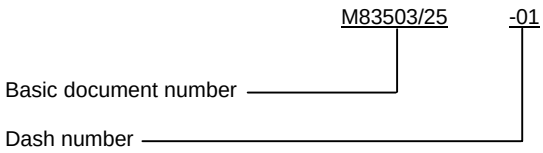

Contact identification: Molded triangle “Δ “ or notch to show number 1 contact, or raised numbers to show position number “ 1”.

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes

CONCLUDING MATERIAL

Custodians:
Air Force - 85

Preparing activity:
DLA - CC

(Project 5935-4110-08)

Review activities:
Air Force - 17, 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:21Z
Check the source to verify that this is the current version before use.