
MILITARY SPECIFICATION SHEET


CAPACITORS, FIXED, ELECTROLYTIC (NONSOLID ELECTROLYTE), TANTALUM

ANODE AND CATHODE, STYLES CRL01 AND CRL02


This amendment forms a part of Military Specification MIL-C-83500/1A(USAF), dated 3 February 1976.

* Figure 1, delete and substitute:

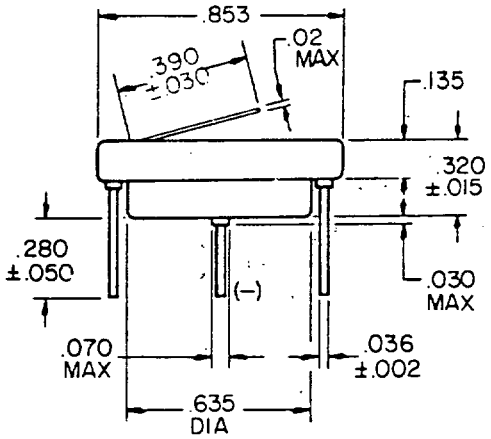

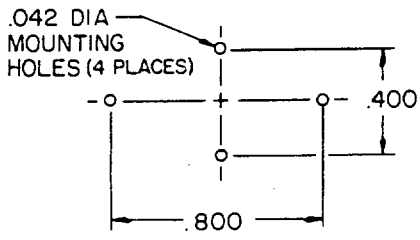

STYLE CRL01

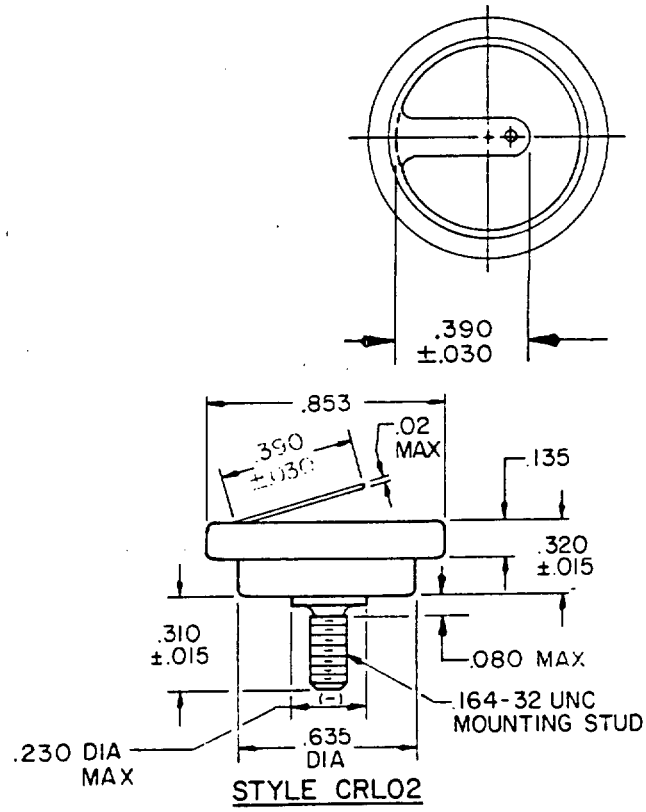

STYLE CRL02

INCHES	MM	INCHES	MM
.002	.05	.164	4.17
.015	.38	.230	5.84
.02	.5	.280	7.11
.030	.76	.310	7.87
.036	.91	.320	8.13
.042	1.07	.390	9.91
.052	1.32	.400	10.16
.070	1.78	.635	16.13
.080	2.03	.800	20.32
.135	3.43	.853	21.67

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.010 (.25 mm).

FIGURE 1. Styles CRL01 and CRL02 capacitors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:18Z
Check the source to verify that this is the current version before use.

The margins of this amendment are marked with an asterisk to indicate where changes from the previous amendment were made. This was done as a convenience only and the government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodian:
Air Force - 85

Review activities:
Air Force - 11, 99
DLA - ES

Preparing activity:
Air Force - 85

(Project 5910-F348)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:18Z
Check the source to verify that this is the current version before use.