NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

MIL-PRF-83504/12A(USAF)
3 November 1989
SUPERSEDING
MIL-S-83504/12(USAF)
25 March 1988


PERFORMANCE SPECIFICATION SHEET

SWITCHES, DUAL IN-LINE PACKAGE (DIP), RECESSED SLIDE ACTUATED, SINGLE POLE, SINGLE THROW STATIONS, SEALED BASE, MACHINE INSERTABLE

This specification is approved for use within the Department of the Air force and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switches described herein shall consist of this specification and the latest issue of MIL-S-83504.

Number of stations	Dim "A" max.	
	mm	Inches
2	(7.11)	.280
3	(9.65)	.380
4	(12.19)	.480
5	(14.73)	.580
6	(17.27)	.680
7	(19.81)	.780
8	(22.35)	.880
9	(24.89)	.980
10	(27.43)	1.080
11	(27.97)	1.180
12	(32.51)	1.280

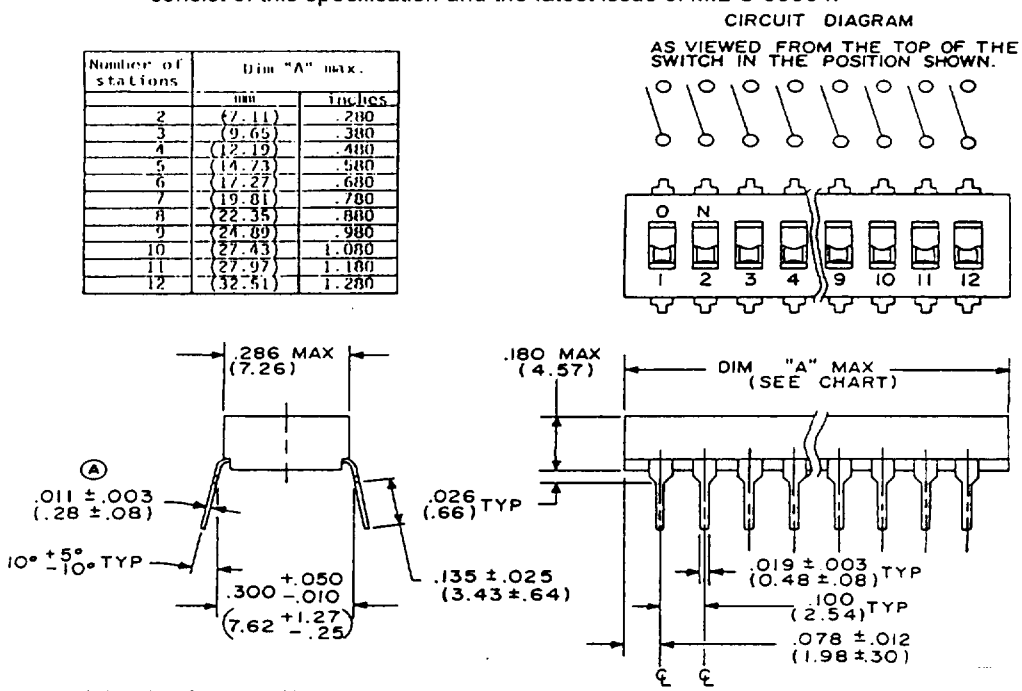

NOTES:
1. Dimensions are in inches.
2. Millimeter equivalents are given for general information only and are in parenthesis.
3. Each switch station is shown in the "OFF" position. Continuity is established (Switch is turned "ON") when the slide actuator is moved to the "ON" identification.
4. Exact shape of the switch is optional provided outline dimensions are not exceeded.
5. Each switch station shall be numbered as shown.
6. Design of terminals and standoffs are optional.

FIGURE 1. Dimensions and configuration.

Ⓐ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:22Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Material: Body and slide actuator, molded plastic.

Terminal finish: Solderable.

Dimensions and configuration: See figure 1.

Orientation: See figure 1.

(A) Operating force: 2.5 to 32 ounces.

Electrical ratings:

10 mA maximum at 50 mV, switching (resistive load).

(A) 25 mA maximum at 24 Vdc, switching (resistive load).

(A) 100 mA maximum at 6 Vdc, switching (resistive load).

Part number: M83504/12- (and dash number from table I).

Example: M83504/12-002.

TABLE I. Dash numbers

Number of poles	2	3	4	5	6	7	8	9	10	11	12
Dash number	002	003	004	005	006	007	008	009	010	011	012

Application note: In applications where the switch will mate with sockets or with panel boards, the user should consider the compatibility of the mating terminals with respect to finishes and mechanical configuration.

Custodian:
Air Force - 85

Review activities:
Air Force - 99
DLA - ES

Preparing activity:
Air Force - 85

(Project 5930-F666)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:22Z
Check the source to verify that this is the current version before use.