NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH POUND

MIL-PRF-83504/6A
AMENDMENT 1
16 December 1996

PERFORMANCE SPECIFICATION SHEET

SWITCHES, DUAL IN-LINE PACKAGE (DIP), RECESSED ROCKER ACTUATOR
STANDARD PROFILE, SINGLE POLE, DOUBLE THROW STATIONS, SEALED BASE

This amendment forms a part of MIL-S-83504/6A, dated 27 October 1993, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 3

Terminals, delete and substitute:

"Terminals: Plug-in or solderable. See table I. The solderable terminals shall be equivalent to or better than solder over nickel over copper over brass. Both plug-in and solderable must meet solderability requirements."

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, AV, MI
Navy - AS
Air Force - 99

Preparing activity:
DLA - CC

(Project 5930-1619-06)

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:21Z
Check the source to verify that this is the current version before use.

Ⓐ

TYPICAL CIRCUIT DIAGRAM

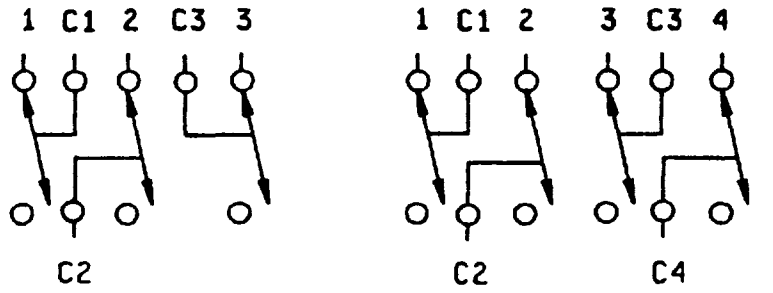

(3 ROCKER) (2 AND 4 ROCKER)

(VIEWED FROM TOP)

Inches	mm	Inches	mm
.003	0.08	.040	1.02
.005	0.13	.090	2.29
.010	0.25	.100	2.54
.012	0.30	.160	4.06
.015	0.38	.200	5.08
.02	0.5	.240	6.10
.020	0.51	.300	7.62
.021	0.53	.380	9.65
.030	0.76		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Each switch position shall be numbered as shown.
4. Exact shape of switch is optional provided outline dimensions are not exceeded.
5. Design of terminals and standoffs are optional.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Material:

Body and actuator rocker: Molded plastic.

Ⓐ Terminals: Gold plated or solderable. See table I. The solderable terminals shall be solder over nickel over copper over brass. Both gold plated and solderable must meet solderability requirements.

Ⓐ Terminal sealing and solderability: The terminal potting material meniscus may extend to .030 inch maximum beyond the solder standoff.

Dimensions and configuration: See figure 1 and table I.

Ⓐ Seal: Sealed base. Temporary tape top seal.

Switch position and setting identification: See figure 1.

Orientation: See figure 1.

Operating force: 6-32 ounces.

Electrical ratings:

10 mA maximum at 50 mV, switching (resistive load).
100 mA maximum at 6 V dc, switching (resistive load).
25 mA maximum at 24 V dc, switching (resistive load).

Application note: In applications where the switch will mate with sockets or with panel boards, the user should consider the compatibility of the mating terminals with respect to finishes and mechanical configuration.

Part or Identifying Number (PIN): M83504/06- (dash number from table I).

Ⓐ TABLE I. Dash numbers and characteristics.

Dash number		Number of stations	Dimension "A" inches (mm)
Terminal finish			
Gold 1/	Solderable		
002	022	2	.380 (9.65)
003	023	3	.580 (14.73)
004	024	4	.780 (19.81)

1/ PIN's for switches equipped with gold terminations are inactive for new design.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:21Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, AV
Navy - AS
Air Force - 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5930-1503-05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:21Z
Check the source to verify that this is the current version before use.