
MILITARY SPECIFICATION SHEET


SOCKETS, (LEAD, ELECTRONIC COMPONENTS) (TYPE III, SOLDER WIRE TURRET)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the sockets described herein shall consist of this specification and the latest issue of MIL-S-83505.

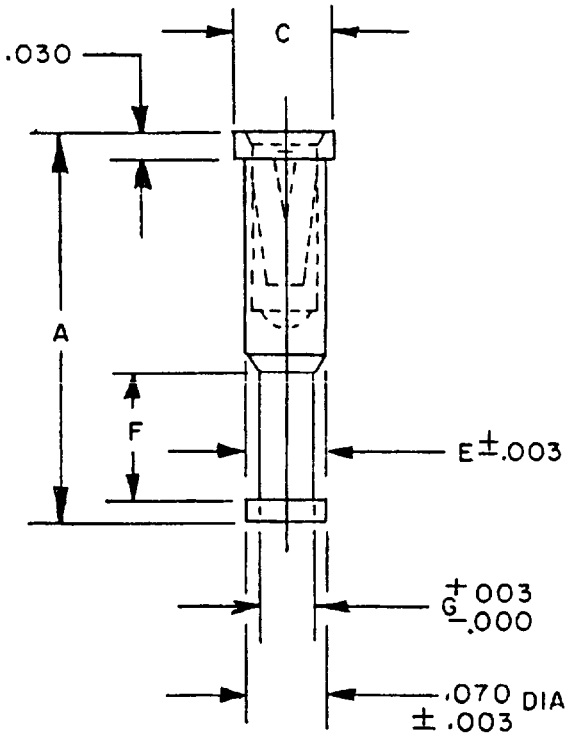

CONFIGURATION A
-001 THRU -004

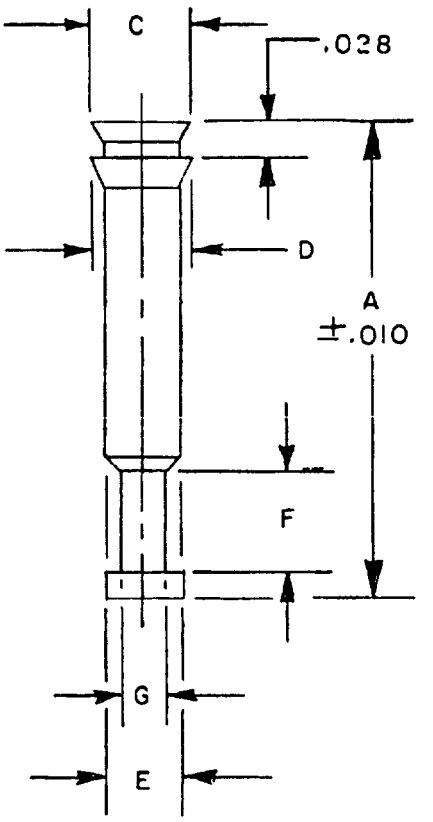

CONFIGURATION B
-005 THRU -008

FIGURE 1. Sockets, lead, (type III) solder wire turret.

© denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:22Z
Check the source to verify that this is the current version before use.

Dash number	Recommended mounting hole dia ±.001	Test gauge "B" length (minimum)	Mating force (max) (lbs)	Sleeve plating ⓒ
-001	.082	.156	2.00	Gold
-002				Tin/lead
-003	.082	.156	4.00	Gold
-004				Tin/lead
-005	.104	.170	12.00	Gold
-006				Tin/lead
-007	.055	.125	1.25	Gold
-008				Tin/lead

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.000	0.00	.045	1.14	.085	2.16	.156	3.96
.003	0.08	.050	1.27	.088	2.24	.170	4.32
.010	0.25	.052	1.32	.093	2.36	.175	4.44
.016	0.41	.055	1.40	.098	2.49	.250	6.35
.021	0.53	.060	1.52	.100	2.54	.270	6.86
.025	0.64	.062	1.57	.104	2.64	.281	7.14
.028	0.71	.070	1.78	.110	2.80	.323	8.20
.030	0.76	.074	1.88	.115	2.92	.432	10.97
.040	1.02	.082	2.08	.125	3.18		

FIGURE 1. Sockets, lead, (type IV) solder cup - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:22Z
Check the source to verify that this is the current version before use.

© Dash numbers and dimensions.

Dash number	Configuration	Accepts pin		A	C Dia	D Dia	E Dia	F Dia	G Dia
		Length	Dia			±.002		±.010	
-001	A	.250	.021	.270	.085	-	.074	.088	.050
-002		.156	.016						
-003	A	.250	.030	.270	.093	-	.074	.088	..050
-004		.156	.021						
-005	B	.281	.050	.432	.115	.110	.098	.100	.045
-006		.170	.040						
-007	B	.175	.021	.323	.062	.060	.052	.100	.025
-008		.125	.016						

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.
4. Unless otherwise specified, tolerance is ±.005 (.13 mm).

FIGURE 1. Sockets, lead, (type III) solder wire turret - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:22Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configurations: See figure 1.

Terminals Type III (solder wire turret)

Mounting: Use .046 inch minimum thickness mounting board.

Test mounting: Use glass epoxy board, type G10 material for mounting sockets.

Socket retention test Not applicable to -001 and -002.

Group qualification: All dash numbers require all qualification tests of MIL-S-83505.

Part number: M83505/3 - (dash number from figure 1).

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities.
Air Force - 11, 17, 99
DLA - ES

Preparing activity.
Air Force - 85

Agent.
DLA - ES

(Project 5935-3520-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:22Z
Check the source to verify that this is the current version before use.