
MILITARY SPECIFICATION SHEET


SOCKETS, (LEAD, ELECTRONIC COMPONENTS) (TYPE IV, SOLDER CUP)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the sockets described herein shall consist of this specification and the latest issue of MIL-S-83505.

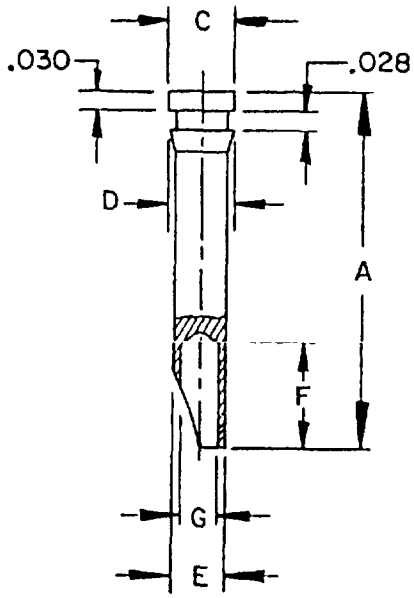

CONFIGURATION A
-001 THRU -004

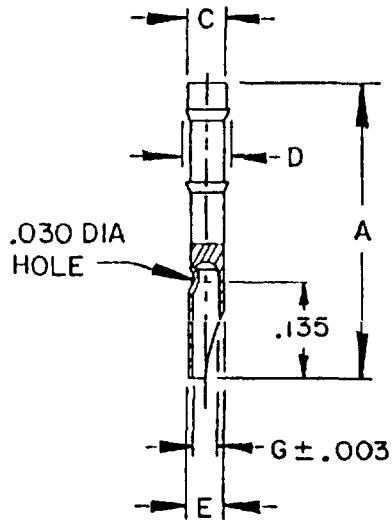

CONFIGURATION B
-005 AND -006

FIGURE 1 Sockets, lead, (type IV) solder cup.

Ⓑ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 202610-23T08:22Z
Check the source to verify that this is the current version before use.

Ⓑ Dash numbers and dimensions.

Dash number	Configuration	Accepts pin		A	C Dia	D Dia	E Dia	F	G Dia
		Length	Dia	±.010		±.002			
-001	A	.175	.021	.395	.072	.060	.053	.150	.038
-002		.140	.016						
-003	A	.281	.030	.504	.085	.082	.073	.150	.055
-004		.156	.020						
-005	B	.210	.016	.406	.055	.060	.051		.038
-006		.125	.021						

Dash number	Recommended mounting hole dia ±.001	Test gauge "B" length (minimum)	Mating force (max) (lbs)	Sleeve plating Ⓑ
-001	.055	.140	2.00	Gold
-002				Tin/lead
-003	.076	.156	4.00	Gold
-004				Tin/lead
-005	.055	.125	2.00	Gold
-006				Tin/lead

FIGURE 1. Sockets, lead, (type IV) solder cup - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:22Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.051	1.30	.082	2.08	.175	4.44
.016	0.41	.053	1.35	.085	2.16	.210	5.33
.020	0.51	.055	1.40	.125	3.18	.281	7.14
.021	0.53	.060	1.52	.135	3.43	.395	10.03
.028	0.71	.072	1.83	.140	3.56	.406	10.31
.030	0.76	.073	1.85	.150	3.81	.504	12.80
.038	0.97	.076	1.93	.156	3.96		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.
4. Unless otherwise specified, tolerance is ±.005 (.13 mm).

FIGURE 1 Sockets, lead, (type IV) solder cup - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:22Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

Dimensions and configurations. See figure 1.

Terminals: Type IV (solder socket).

Mounting: Use .046 inch minimum thickness mounting board.

Test mounting:

-001 and -002: Use glass epoxy board, type G10 material for mounting sockets.

-003: Use teflon board (.187 inch minimum) for mounting sockets.

Group qualification.

-001 through -004: Require all qualification tests of MIL-S-83505.

-005 and -006. Visual and mechanical tests of MIL-S-83505 and qualification of -001 through -004.

Part number. M83505/4 - (dash number from figure 1).

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Air Force - 11, 17, 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3520-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:22Z
Check the source to verify that this is the current version before use.