FED. SUP CLASS
2805

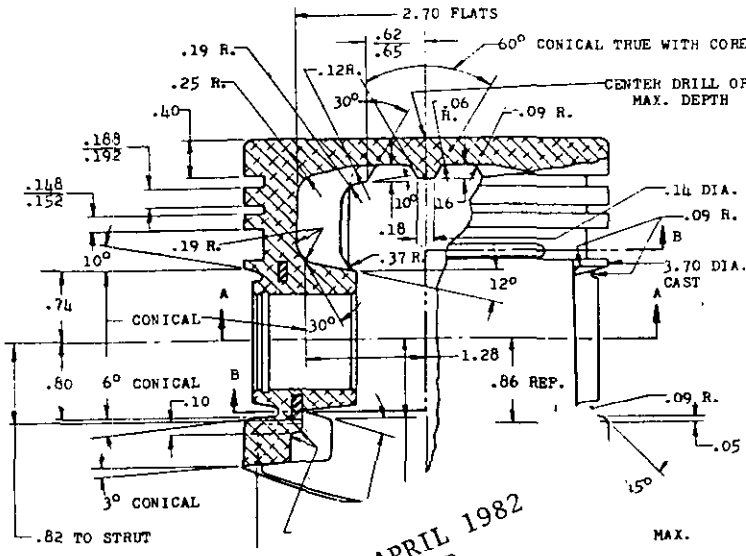


RING LANDS MAY LOCALLY SHOW EFFECT OF CAM GRINDING SKIRT.

PIN HOLE MUST BE SQUARE WITH SKIRT AXIS WITHIN .0005 INCH PER INCH OF SKIRT LENGTH.

FINISHED PIN BORE TO BE FREE OF TIN PLATING.

SERVICE PISTONS TO BE FURNISHED WITH PIN FITTED .0001/.0003 LOOSE AND WITH PIN RETAINERS.

JIGGING BOSSES OR NOTCHES PERMISSIBLE AS QUALIFIED.

SIDES OF RING GROOVES MUST RUN TRUE WITH PISTON PIN BORE WITHIN .002 T.I.R.

PISTON PIN RETAINING RING GROOVES TO HAVE SHARP CORNERS.

(D) CANCELED AFTER 21 APRIL 1982
NO SUPERSEDING STANDARD.

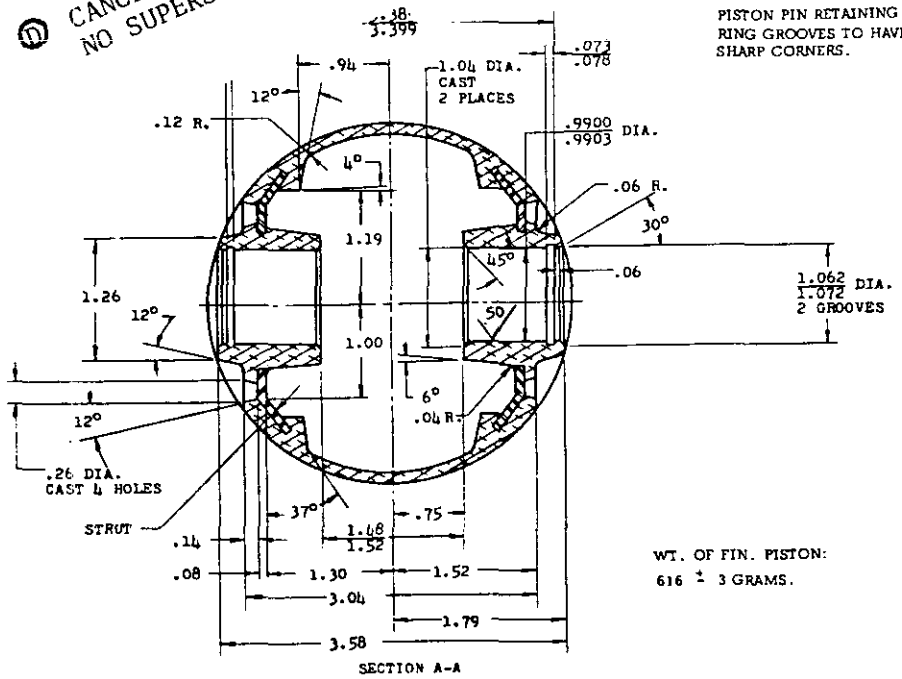


SECTION A-A

WT. OF FIN. PISTON:
616 ± 3 GRAMS.

© ENTIRE STANDARD REVISED

APPROVED 19 JUNE 1952 REVISED (A) 27 NOVEMBER 1953 (B) 24 OCTOBER 1955 (C) 7 MAR 1966 (D) 21 APRIL 1982

REVIEW ACTIVITY : DCSC, 69
USER ACTIVITY : TD, ATAC

This Military Standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

| P.A. ARMY NO(ERDL) Other Cust A.F. - 69 NAVY - TD | TITLE: PISTON, INTERNAL COMBUSTION ENGINE: 3-3/4" X 3-3/4" | PART NO. MS 13956-1 MILITARY STANDARD MS 13956 |
|---|---|---|
| PROCUREMENT SPECIFICATION MIL-E-11275 | SUPERSEDES: | SHEET 1 OF 11 |

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:31Z
Check the source to verify that this is the current version before use.