
FED. SUP CLASS
5935

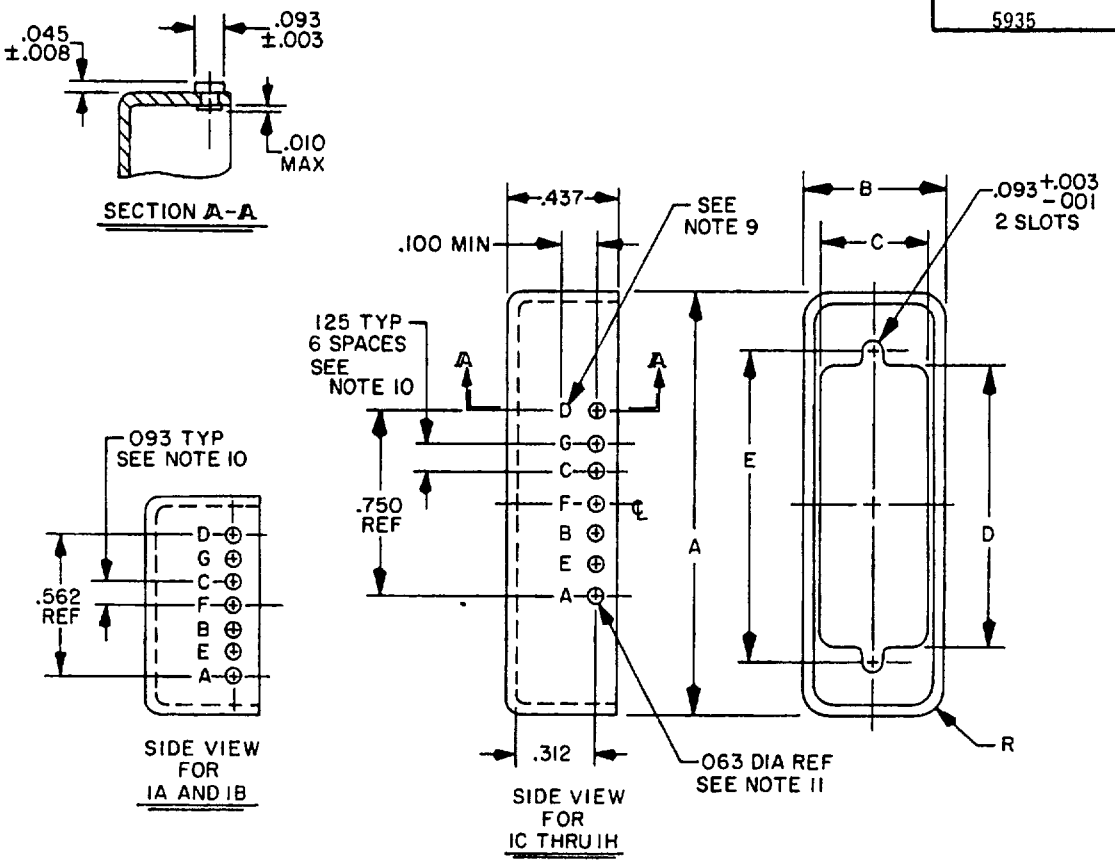

DASH NUMBER
1A THRU 1H
SHELL FOR PLUG

MS PART NO	CONN. SIZE (NO OF CONTACTS)	A MAX	B MAX	C MIN	D MIN	E ±.005 (.13)	R
MS14072-1A	4	.870 (22.10)	.300 (7.62)	230 (5.84)	430 (10.92)	562 (14.27)	031 (.79)
-1B	7	.870 (22.10)	.300 (7.62)	230 (5.84)	.430 (10.92)	.562 (14.27)	.031 (.79)
-1C	14	.970 (24.64)	.370 (9.40)	.300 (7.62)	.530 (13.46)	.625 (15.88)	.062 (1.57)
-1D	20	1.160 (29 46)	.370 (9 40)	.300 (7.62)	.730 (18.54)	814 (20.68)	.062 (1.57)
-1E	26	1.345 (34.16)	.370 (9.40)	.300 (7.62)	.910 (23.11)	1.000 (25.40)	.062 (1.57)
-1F	34	1.340 (34.04)	.480 (12.19)	.410 (10.41)	.900 (22.86)	1.032 (26.21)	.062 (1.57)
-1G	44	1.590 (40 39)	480 (12.19)	.410 (10.41)	1.140 (28.96)	1.281 (32.54)	.062 (1.57)
-1H	50	1.710 (43.43)	.480 (12.19)	.410 (10.41)	1.270 (32.26)	1.408 (35.76)	.062 (1 57)

REVISED
APPROVED 3 APR 78

User activities: Army - ME, AM, AR; Navy - MC; Air Force -
Review activities: Army - MI, AT; Navy - AS; Air Force - 11, 99; DSA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

P A Navy - EC Other Cust AF - 85 Army - EL	International Interest	TITLE SHELL, ELECTRICAL CONNECTOR FOR 7, 9, 14, 20, 26, 34, 42, and 50 CONTACT CONNECTORS	MILITARY STANDARD MS14072
Procurement Specification MIL-C-28748		SUPERSEDES	PAGE 1 OF 2

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE


5935-2071-20

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:34Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

User activities: Army - ME, AM, WC; Navy - MC; Air Force -

Review activities: Army - MI, AT; Navy - AS; Air Force - 11,80; DSA - ES

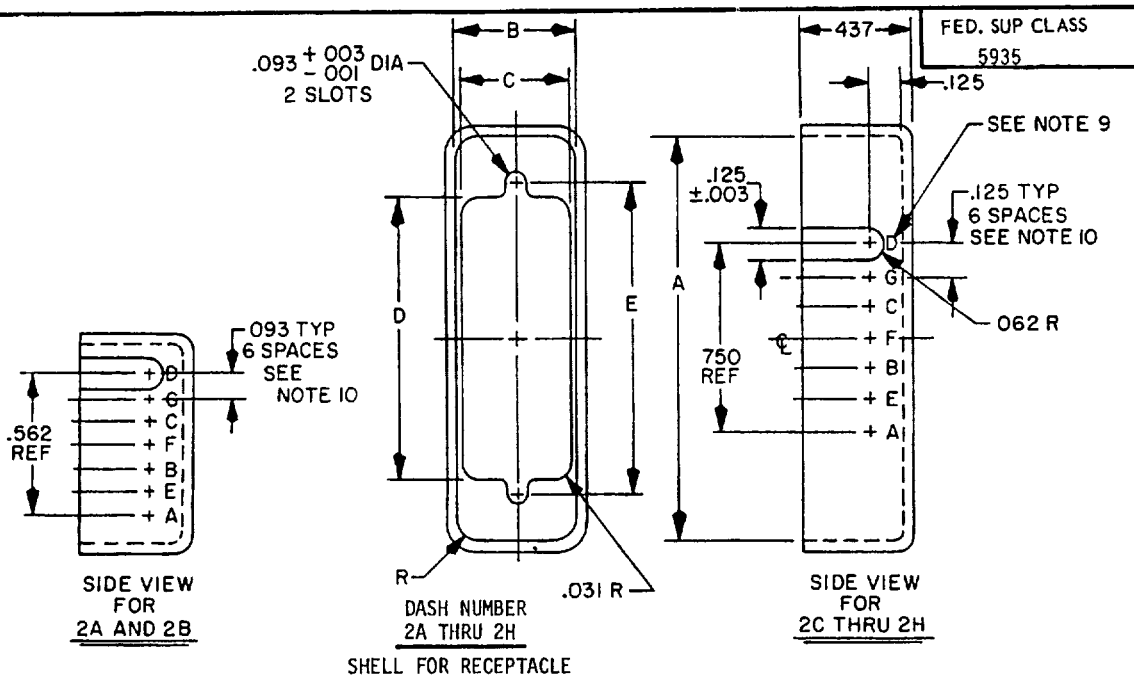

FED. SUP CLASS 5935

REVISED

APPROVED 3 APR 78

INCHES	MM
.001	.03
.003	08
.008	20
010	.25
.031	.79
.045	1.14
.062	1.57
.063	1.60
093	2 36
.100	2.54
.125	3.18
312	7.92
.437	11.10
562	14.27
.750	19.05

MS PART NO.	CONN. SIZE (NO OF CONTACTS)	A MIN	B MIN	C MIN	D MIN	E ± 005 (.13)	R ±.005 (.13)
MS14072-2A	4	.875 (22.22)	.305 (7.75)	.230 (5.84)	430 (10.92)	.562 (14.27)	.031 (.79)
-2B	7	875 (22.22)	.305 (7 75)	.230 (5.84)	.430 (10.92)	562 (14.27)	.031 (.79)
-2C	14	.975 (24.76)	375 (9 52)	.300 (7.62)	530 (13.46)	.625 (15.88)	.062 (1.57)
-2D	20	1.165 (29.59)	.375 (9 52)	.300 (7 62)	.730 (18 54)	.814 (20.68)	.062 (1.57)
-2E	26	1.350 (34.29)	.375 (9.52)	.300 (7.62)	.910 (23 11)	1.000 (25.40)	.062 (1.57)
-2F	34	1.345 (34.16)	.480 (12.19)	.410 (10.41)	.900 (22.86)	1 032 (26.21)	.062 (1.57)
-2G	44	1.595 (40.51)	.480 (12.19)	410 (10 41)	1.140 (28 96)	1.281 (32.54)	.062 (1.57)
-2H	50	1.715 (43.56)	.480 (12.19)	.410 (10.41)	1.270 (32.26)	1.408 (35.76)	.062 (1.57)

NOTES

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.016 (.41 mm).
3. Metric equivalents are given for general information only and are based upon 1.00 inch = 25 4 mm.
4. Metric equivalents are in parentheses.
5. Material: Aluminum alloy per QQ-A-25018, temper 0, or QQ-A-25011, temper H12, .025 (.64 mm) thick.
6. Finish: Anodize per MIL-A-8625 type I or II
7. Referenced documents shall be of the issue in effect on date of invitation for bids
8. For design feature purposes, this standard takes precedence over procurement documents referenced herein
9. Polarization position letter is .06 (1.5 mm) height minimum as shown using permanent marking slot and letter for applicable location only The orientation is optional.
10. The location may vary ±.005 (.13 mm) from the centerline.
11. One polarization pin is used when applicable

P A Navy - EC Other Cust AF - 85 Army - EL	International interest	TITLE SHELL, ELECTRICAL CONNECTOR FOR 7, 9, 14, 20, 26, 34, 42, and 50 CONTACT CONNECTORS	MILITARY STANDARD MS14072
Procurement Specification MIL-C-28748		SUPERSEDES	PAGE 2 OF 2

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5935-2071-20

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:34Z
Check the source to verify that this is the current version before use.