

FED. SUP CLASS
5950


CASE, MOUNTING TERMINAL ARRANGEMENT AND MARKING

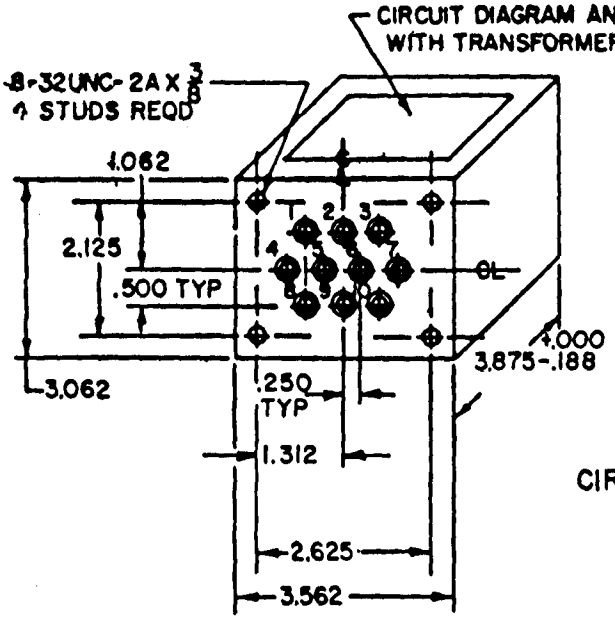

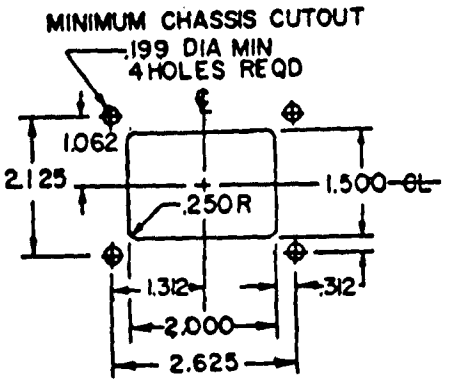

INCHES	MM	INCHES	MM
.188	4.76	1.500	38.10
.250	6.35	2.000	50.80
.312	7.92	2.125	53.98
3/8	9.53	2.625	66.68
.500	12.70	3.062	77.77
.750	19.05	3.562	90.47
1.062	26.97	3.875	98.43
1.312	33.32		

CIRCUIT DIAGRAM AND MARKING

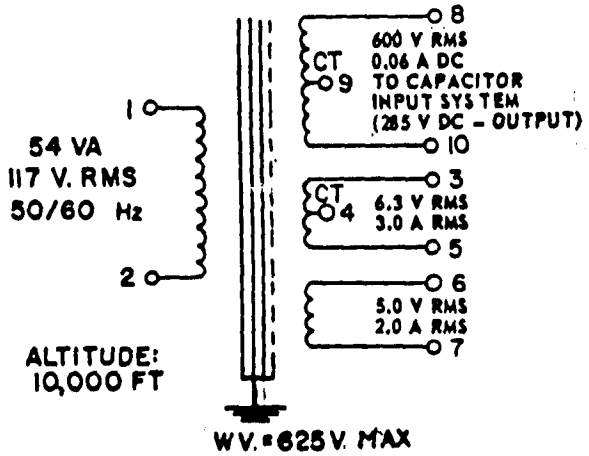

ALTITUDE - 10,000 FT MAX

THIS MILITARY STANDARD INACTIVE FOR NEW DESIGN AFTER 23 JUNE 1981
NO SUPERSEDING STANDARD

NOTES:
1. All dimensions in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance on case dimensions is +.000(.00 mm), -.125(3.18 mm).
4. Tolerance on mounting dimensions is ±.016(.41 mm). Mounting studs are symmetrically located with respect to the centerline of the case.
5. Tolerance on terminal position dimensions is ±.031(.79 mm). Terminals fit within minimum chassis cutout.
6. Type designation, MS part number and manufacturer's name or symbol to be marked on side opposite terminals.
7. Referenced document shall be of the issue in effect on date of invitation for bids.
8. This standard takes precedence over document referenced herein.

(D) denotes changes

MS PART NO.	TYPE DESIGNATION
MS16403-1	TF4RX03JB221

P.A EC Other Cust ER AF-85	International interest	TITLE TRANSFORMER, POWER, STEP-DOWN AND STEP-UP, TYPE TF4RX03JB221	MILITARY STANDARD MS16403
Procurement Specification MIL-T-27		SUPERSEDES:	PAGE 1 OF 2

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5950-0599-1

APPROVED 18 JUNE 1956 · REVISED (A) 30 NOV 1956 (B) 18 MAR 1966 (C) 23 June 1981 (D) 2 June 1982

User activities: Army - MI, Navy - MC, CG, Air Force - 19, 14

Review activities: Army - AR, Navy -, Air Force - 11, 17

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for competitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:56Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5950

ELECTRICAL RATING

Primary (1–2): 54 v amp, 117 v rms, 50/60 Hz
Secondary (3–4–5): 6.3 v rms ct, 3.0 amp rms
(6–7): 5.0 v rms, 2.0 amp rms
(8–9–10): 600 v rms ct, 0.060 amp dc, 285 v dc

Duty cycle ..... Continuous
Life expectancy ..... 10,000 hr min
Working voltage ..... 625 v max
Altitude ..... 10,000 feet max
Operating temperature ..... 105°C max

NOTE: When numbers in parentheses, eg (1–4) are used, they indicate the winding and the extreme terminals of the winding.

PHYSICAL CHARACTERISTICS

Case size ..... JB
Weight ..... 5.25 lb max
Terminals ..... Turret, standoff type
Terminal height ..... 0.812 (20.62 mm) max
Shock ..... Method I, test condition C (50G)

TEST	ELECTRICAL PROPERTIES					LIMITS
Dielectric withstanding voltage: At sea-level	Windings	(1–2)	(3 – 5)	(6–7)	(8 – 10)	
	Volts rms	1,750	1,750	1,750	1,750	---
No load	With 117 v, 60 Hz across (1–2):					
	Current in (1–2): 0.157 amp					Max
	Power in (1–2): 4.4 watts					Max
	Voltage across (3–5): 7.07 v rms ct					±2%
	Voltage across (6–7): 5.42 v rms					±2%
	Voltage across (8–10): 632 v rms ct					±4%
Rated load	With 117 v, 50/60 Hz across (1–2), and (8–10) loaded with JAN-5R4WGB full-wave rectifier and 0.060 amp dc into 8 mfd capacitive input filter and rated current in all other secondaries:					
	Voltage across (3–5): 6.3 v rms ct, 3.0 amp rms					±2%
	Voltage across (6–7): 5.0 v rms, 2.0 amp rms					±2%
	Voltage across (8–10): 600 v rms ct, 0.060 amp dc					±4%
Electrostatic shielding	Voltage ratio: 5 to 1 at 20 kHz					Min
DC resistance	(1–2): 10.0 ohms (3–5): 0.25 ohm (6–7): 0.20 ohm (8–10): 400 ohms					Max
Temperature rise	40°C with 117 v rms, 50 Hz (or 140 v rms, 60 Hz) across (1–2) at an ambient temperature of 65°C					Max

(D) Quality assurance provisions:

Qualification inspection: Not applicable for this specification.

Quality conformance inspection: Group A and B test of MIL-T-27 shall be applicable.

APPROVED 18 JUNE 1956 REVISED (B) 18 MAR 1966 (C) 23 JUNE 81 (D) FOR CHANGES SEE PAGE 2

P.A EC	International interest	TITLE	MILITARY STANDARD
Other Cust ER AF-85		TRANSFORMER, POWER, STEP-DOWN AND STEP-UP TF4RX03JB221	MS 16403
Procurement Specification MIL-T-27		SUPERSEDES:	PAGE 2 OF 2

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5950-0599-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:56Z
Check the source to verify that this is the current version before use.