

FED. SUP CLASS
5950


CASE, MOUNTING, TERMINAL ARRANGEMENT, AND MARKING

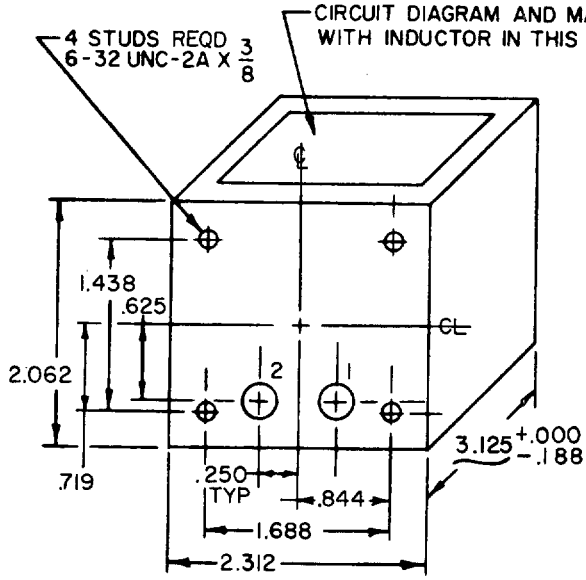

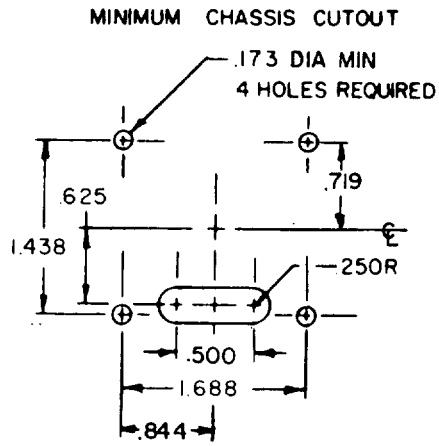

Ⓑ INACTIVE FOR DESIGN AFTER 29 MAR 1982. NO SUPERSEDING STANDARD. SEE MIL-STD-962 FOR STATUS CRITERIA.

INCHES	MM
.173	4.39
.188	4.78
.250	6.35
3/8	9.53
.500	12.70
.625	15.88
.719	18.26
.844	21.44
1.438	36.53
1.688	42.88
2.062	50.77
2.312	58.72
3.125	79.38

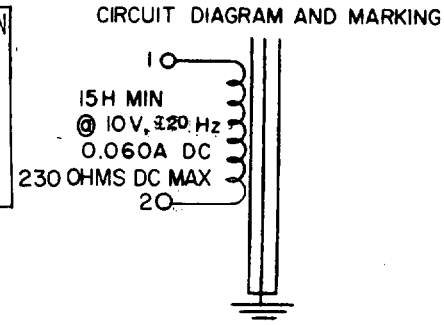

NOTES:
1. All dimensions in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance on case dimensions is +.000(.00 mm), -.125(3.18 mm).
4. Tolerance on mounting dimensions is ±.016(.41 mm). Mounting studs are symmetrically located with respect to the centerline of the case.
5. Tolerance on terminal position dimensions is ±.031(.79 mm). Terminals fit within minimum chassis cutout.
6. Type designation, MS part number and manufacturer's name or symbol to be marked on side opposite terminals.
7. Referenced document shall be of the issue in effect on date of invitation for bids.
8. This standard takes precedence over document referenced herein.

Ⓑ Denotes changes.

MS PART NO.	TYPE DESIGNATION
MS16465-1	TF4RX04FA207

APPROVED 17 OCT 1956 REVISED Ⓐ 18 MAR 1966 Ⓑ 29 MAR 1982

User activities: Army MI, Navy, Air Force MC,CG 19,14
Reviewer activities: Army AR, Navy, Air Force 11, 80, 17

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY- EC Other Cust ARMY- ER AF- 85	International interest	TITLE INDUCTOR, POWER, TYPE TF4RX04FA207	MILITARY STANDARD MS 16465	
Procurement Specification MIL-T-27		SUPERSEDES:	SHEET 1 OF 2	

DD FORM 10 APR 64 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5950-0595-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:57Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

User activities: Army MI, MC, CG
Navy
Air Force 19, 14

Reviewer activities: Army AR
Navy
Air Force 11, 80, 11

FED. SUP CLASS
5950

ELECTRICAL RATING

Inductance	15 h min	Duty cycle	Continuous
Current	0.060 amp dc	Life expectancy	10,000 hr min
Voltage	10 v rms	Working voltage	1,070 v max
Frequency	120 Hz	Altitude	10,000 feet max
DC resistance	230 ohms max	Operating temperature	105° C max

Note: When numbers in parentheses, eg (1-2) are used, they indicate the winding and the extreme terminals of the winding.

PHYSICAL CHARACTERISTICS

Case size	FA
Weight	2.0 lb max
Terminals	Turret, standoff type
Terminal height	0.469 (11.91 mm) max
Shock	Method I test condition C (50G)

TEST	ELECTRICAL PROPERTIES		LIMITS
Dielectric withstanding voltage: At sea level	Winding	(1–2)	
	Volts rms	2,500	
Inductance	With 10 v rms, 120 Hz, and 0.060 amp dc applied to (1–2): 15 h		Min Max
DC resistance	(1–2): 230 ohms		Max
Temperature rise	40° C with 10 v rms, 120 Hz, 0.060 amp dc applied to (1–2) at an ambient temperature of 65° C		Max

APPROVED 17 OCT 1956 REVISED (B) For changes see pages 1 and 2.

(B) Quality Assurance provisions.

Qualification inspections: Not applicable for this specification.

Quality conformance inspections: Groups A and B of MIL-T-27 shall be applicable.

P.A. NAVY- EC Other Cust ARMY- ER AF- 85	International interest	TITLE INDUCTOR, POWER, TYPE TF4RX04FA207	MILITARY STANDARD MS16465
Procurement Specification MIL-T-27		SUPERSEDES:	SHEET 2

DD FORM 10 APR 64 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5950-0595-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:57Z
Check the source to verify that this is the current version before use.