
FED SUP CLASS
4730

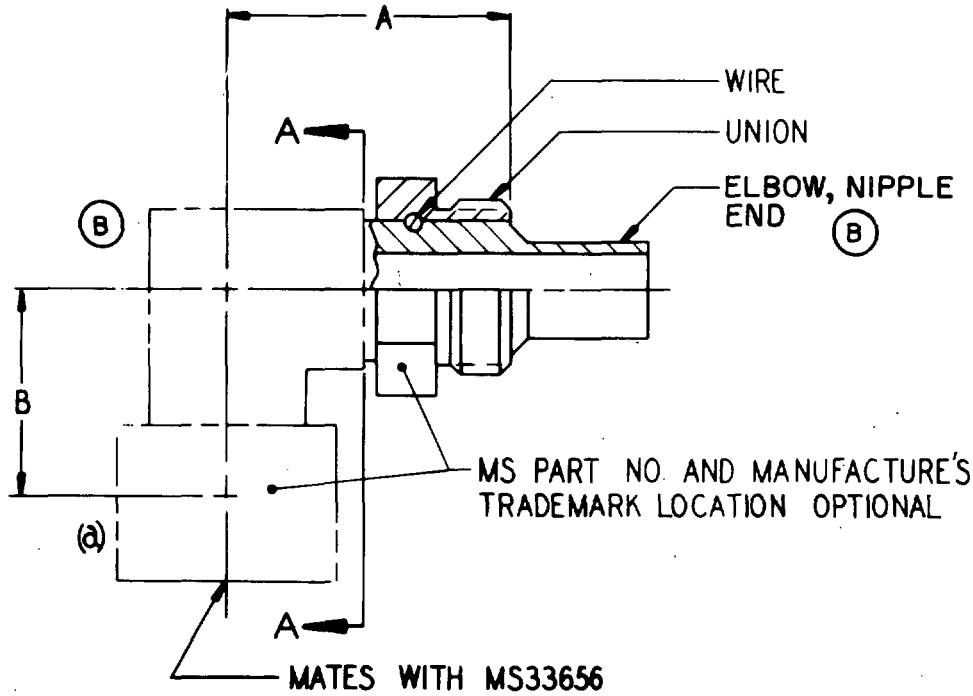

	MS PART NO.	WIRE	(B) UNION NIPPLE	ELBOW, NIPPLE (B) END	A ± .020	B ± .020
(b)	MS27068-3/-4C (B)	MS27072-4C	MS27071-4C	MS27086-3/-4C	.845	.530
	MS27068-4C			MS27086-4C		.580
	MS27068-5C	MS27072-5C	MS27071-5C	MS27086-5C	.900	.655
	MS27068-6C	MS27072-6C	MS27071-6C	MS27086-6C	.965	.720
	MS27068-8C	MS27072-8C	MS27071-8C	MS27086-8C	1.235	.830
	MS27068-8			MS27086-8D		
(c)	MS27068-3C	MS27072-3C	MS27071-3C	MS27086-3C	.795	.530

(B) "A" IS THE DIMENSION BETWEEN THE HOSE END OF THE THREADED SECTION OF THE UNION AND THE CENTERLINE OF THE INSERT.

(B) "B" IS THE DIMENSION BETWEEN THE CENTERLINE OF THE NIPPLE AND THE FREE END OF THE INSERT.

(B) FOR CHANGES SEE SHEETS 1 AND 2.

APPROVED 1 Sep 61 Revised (A) 2 May 66 (B) 30 Jun 72

NOTE: The Government has a royalty free license under the following listed patents for the benefit of Manufacturers of the item either for the Government or for use in equipment to be delivered to the Government. (U.S. Patent Nos. 2,833,567; 3,044,163; 3,055,682)

User Activities:
Army - WC, ME, MI

Review Activities:
Army - AV
Navy - AS
Air Force - 82

This military standard is approved by the Department of Defense and is mandatory on all activities. Suggestions for improvements and design applications and for reporting use shall be made from this document.

PA Air Force-11 (B) Other Cust Army - AV Navy - AS	TITLE ELBOW SUB ASSEMBLY, FLARED, 90° FORGED, SWIVEL NUT	MILITARY STANDARD MS27068
Procurement Specification MIL-F-27272	SUPERSEDES	SHEET 1 OF 2

DD FORM 1 SEP 67 672

DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:15Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

MATERIAL : SUFFIX "C" : CORROSION RESISTING STEEL. SUFFIX "D" : ALUMINUM ALLOY. NO SUFFIX : COMBINATION OF ALUMINUM ALLOY AND CORROSION RESISTING STEEL. SEE MS STANDARDS LISTED ON SHEET 1 FOR MATERIAL SPECIFICATIONS.
CORROSION RESISTING STEEL : DO NOT PASSIVATE. ALUMINUM ALLOY : ANODIZE SPECIFICATION MIL-A-8625, TYPE II, DYE BLUE.

THESE PARTS FOR USE WITH MIL-H-27267 HOSE.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

ANY FORGED DESIGN OF ADAPTER COMPONENTS TO THE LEFT OF PLANE A-A IS ACCEPTABLE PROVIDED : DIM'S "A" AND "B" THE MATERIALS SPECIFIED, THE FABRICATION NOTES OF THIS STANDARD AND REQUIREMENTS OF THE PROCUREMENT SPECIFICATION ARE MET.

(a) IF REQUIRED, LOCKWIRE HOLES TO BE DRILLED IN ACCORDANCE WITH AS1043 AND SUFFIX "L" ADDED TO PART NUMBER. EXAMPLE : MS27068-6CL.

(b) SWIVEL NUT AND CONE SEAT OF ELBOW SHALL MATE WITH MS33656-3 FITTING. THE REMAINING PORTION OF THE ASSEMBLY SHALL MATE WITH MIL-H-27267-4 HOSE.

(C) MS27068-3C INACTIVE FOR DESIGN AFTER 2 MAY 1966 USE ONLY FOR REPLACEMENT OF IDENTICAL ITEMS IN EXISTING MILITARY EQUIPMENT. USE (B) MS27068-3/-4C FOR DESIGN.

NEXT ASSEMBLY MS27060

APPROVED 1 Sep 61 Revised (B) FOR CHANGES SEE SHEETS 1 AND 2.

User Activities: Army - WC, MC, MI

Review Activities: Army - AV, Navy - AS, Air Force - 82

This military standard is approved by the Department of Defense and is mandatory on all activities. Suggestions for all new engineering and design applications and for repetitive use shall be made from this document.

NOTE: The Government has a royalty free license under the following listed patents for the benefit of Manufacturers of the item either for the Government or for use in equipment to be delivered to the Government. (U.S. Patent Nos. 2,833,567; 3,044,163; 3,055,682)

P.A. Air Force - 11 (B) Other Cust Army - AV Navy - AS	TITLE ELBOW SUB ASSEMBLY, FLARED, 90° FORGED, SWIVEL NUT	MILITARY STANDARD MS27068
Procurement Specification MIL-F-27272	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 57 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:15Z
Check the source to verify that this is the current version before use.