
FED. SUP CLASS
4730

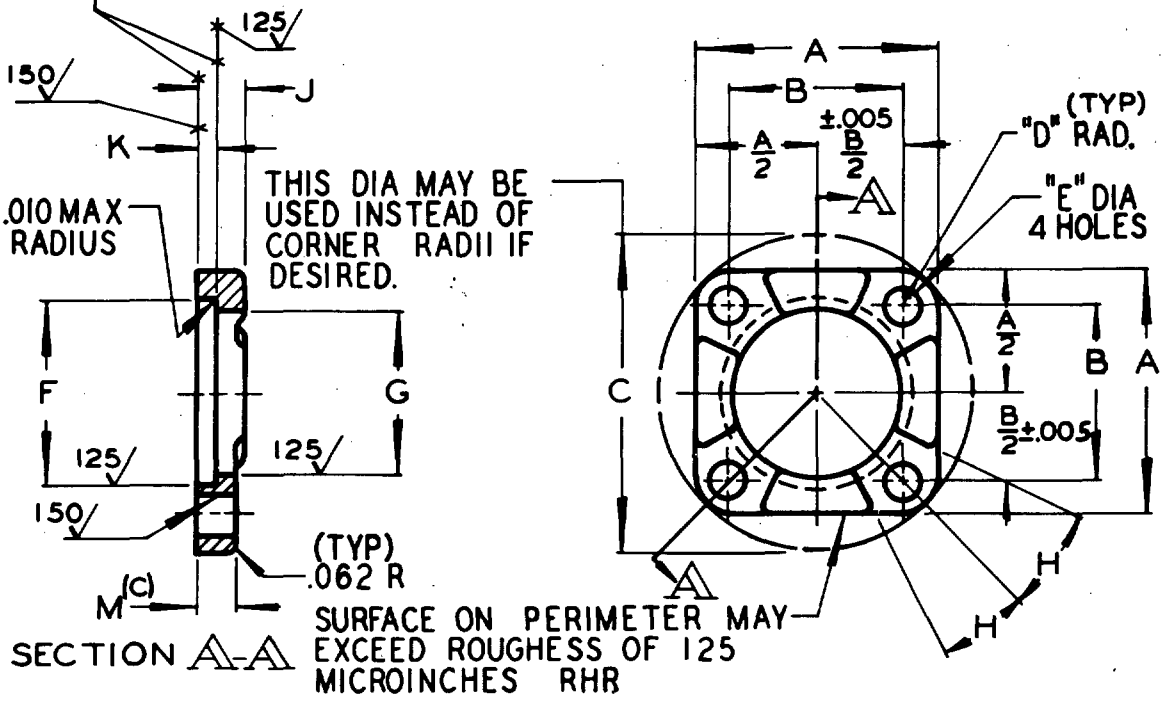

MATERIAL: CORROSION RESISTING STEEL, CLASS 304, CONDITION "A", SPECIFICATION QQ-S-763.

PASSIVATE PER MIL-F-27272.

(a) DIAMETERS "G" AND "F" SHALL BE CONCENTRIC WITHIN .010 TIR.

(b) REDUCTION OF DIMENSIONS BY 7° MAX DRAFT ANGLE PERMISSIBLE IF FORGED.

PART MAY BE FORGED OR MACHINED FROM BAR. (C) IF MACHINED, THICKNESS SHALL BE TO DIMENSION "M."

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: RADIUS OR BREAK ALL CORNERS .005 ±.005/-.000. REMOVE ALL BURRS AND SLIVERS. SURFACE ROUGHNESS PER ASA B46.1-1962.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

THIS IS A DESIGN STANDARD FOR MANUFACTURING PURPOSES. THE ITEM IS ONLY PROCURED AS AN INTEGRAL PART OF ADAPTER ASSY. NEXT ASSEMBLY MS27062, MS27064 AND MS27066.

(B) ENTIRE STANDARD REVISED.

APPROVED 1 SEP 61 REVISED (A) 2 JUL 63 (B) 2 MAY 66

(B) FOR CHANGES SEE SHEETS 1 AND 2.

P A AIR FORCE-11 Other Cust ARMY-MO NAVY-WP	TITLE FLANGE, SWIVEL, RETAINING	MILITARY STANDARD MS27077
Procurement Specification	SUPERSEDES	SHEET 1 OF 2

DD FORM 1 SEP 8 672

User Activities
Army - MI
Navy - SH
Review Activities
Army - MO
Navy - WP
Air Force - 11, 69
This standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:15Z
Check the source to verify that this is the current version before use.

This military standard is approved by the Department of Defense and is mandatory on all activities. Section for all new engineering and design applications and for repetitive use shall be made from this document.

Review Activities:
Army - MO
Navy - WP
Air Force - 11, 69

User Activities:
Army - MI
Navy - SH

DD FORM 672

PA
AIR FORCE - 11
Other Cust
ARMY - MO
NAVY - WP
Procurement Specification

TITLE
FLANGE, SWIVEL, RETAINING

MILITARY STANDARD

MS27077

SHEET 2 OF 2

FED SUP CLASS
4730

(B) ENTIRE STANDARD REVISED

MS PART NUMBER	A(b)		B ±.005	C ±.015	D ±.016	E +.010 -.000	F(a) +.005 -.000	G(a) +.010 -.000	H ± 1/2°	J ±.016	K +.005 -000	M +.015 -.005
MS27077-8C	1.390	±.016	.950	1.782	.219	.205	.885	.750	20°	.297	.136	.234
MS27077-10C	1.468		1.038	1.906			1.010	.880				
MS27077-12C	1.594		1.156	2.094			1.260	1.125				
MS27077-16C	1.750		1.312	2.312			1.510	1.375	18°			
MS27077-20C	2.188	±.020	1.656	2.875	.266	.266	1.854	1.688	16°	.359	.168	.297
MS27077-24C	2.375		1.812	3.094	.281		2.135	1.938				

APPROVED 1 SEP 61 REVISED (A) 2 JUL 63 (B) FOR CHANGES SEE SHEETS 1 AND 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:15Z
Check the source to verify that this is the current version before use.