INCH-POUND

MS27147D
w/AMENDMENT 1
18 March 2025
SUPERSEDING
MS27147D
17 June 2003

DETAIL SPECIFICATION SHEET

ADAPTER, CONNECTOR – 3-WAY, NO. 12, 14 AND 16 AWG, WATERPROOF

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification.

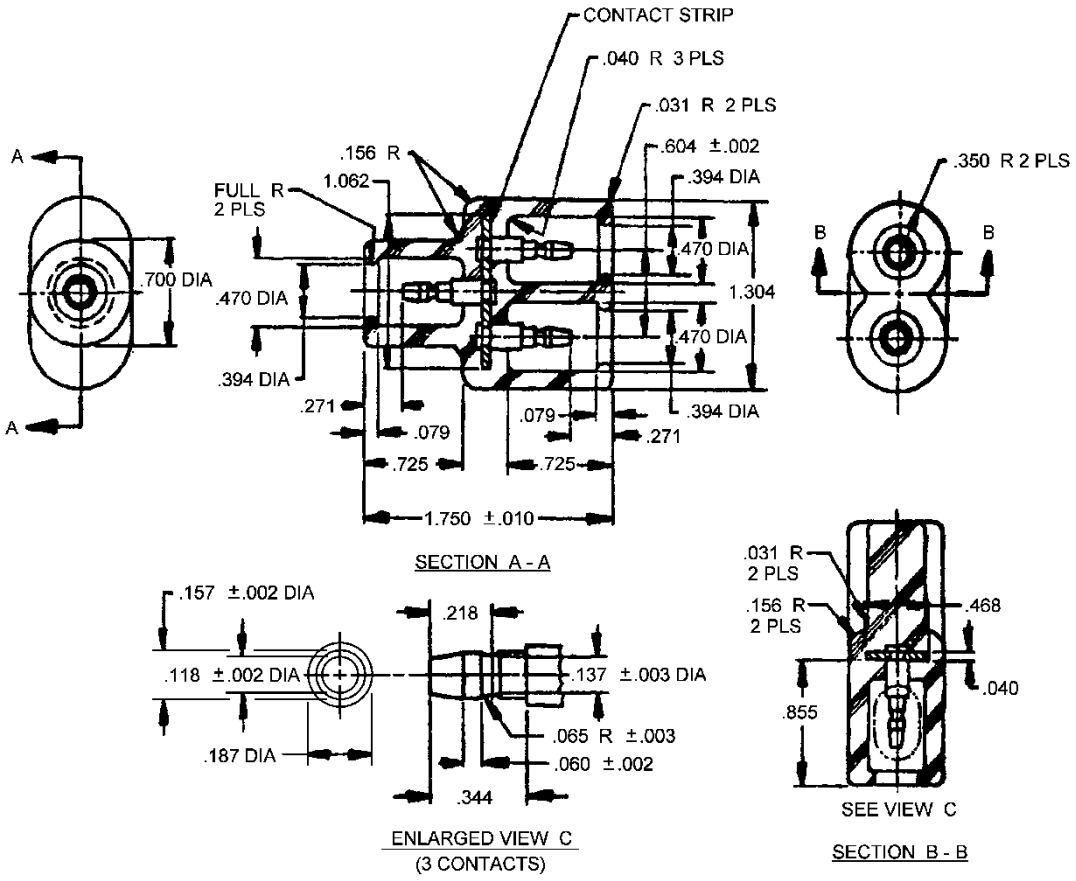


FIGURE 1. Configurations and dimensions.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:17Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Material:

Shell: Rubber in accordance with ASTM D2000, M3BC610A14C12EO34F19.

Terminal: Brass composition, temper half hard minimum in accordance with ASTM B36/B36M, ASTM B121/B121M or ASTM B124/B124M.

Contact strip: Steel, commercial quality, 1008 to 1020, HRP&O or CR, temper optional, in accordance with QQ-S-698.

Protective finish:

Terminal: Silver plate, grade D, class S, .0002-inch minimum thickness in accordance with ASTM B700.

Contact strip: Cadmium plate, type I, class A, in accordance with SAE AMS QQ-P-416.

Mating connector: See MS27143 and MS27144, style 1 and 2.

When connectors are coupled, the following requirements shall apply:

Voltage drop: The voltage drop shall not exceed 20 millivolts and shall meet the requirements outlined in MIL-STD-202-307.

Dielectric strength: The assembly shall withstand dielectric strength test of 1000 volts, and meet the requirements of MIL-STD-202-302.

Waterproof requirements: The assembly shall be waterproof. Refer to MIL-HDBK-1184, or equivalent, for guidance on waterproof testing.

Salt spray corrosion test: The assembly shall meet the requirements of salt spray corrosion test outlined in MIL-STD-202-101 (5% saline solution, 200 hours duration).

Marking shall consist of the MS number and the manufacturer's identification in accordance with MIL-STD-1285.

Pull test: Terminals shall withstand a pull test of 100 pounds (46 kilograms).

Separation force: The force required to uncouple the connectors shall not exceed 50 percent of the values expressed in the pull test above when tested at -55°C and at 85°C.

Part or Identifying Number (PIN): MS27147-1.

Reference drawing number 7982404 may be obtained from the U.S. Army Tank Automotive Command, Warren, MI 48397-5000.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:17Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – AT
Air Force – 85
Navy – MC
DLA – CC

Preparing activity:
DLA - CC

(Project 5935-2025-032)

Review activities:
Army – CR, CR4

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:17Z
Check the source to verify that this is the current version before use.