
FED SUP CLASS
5920

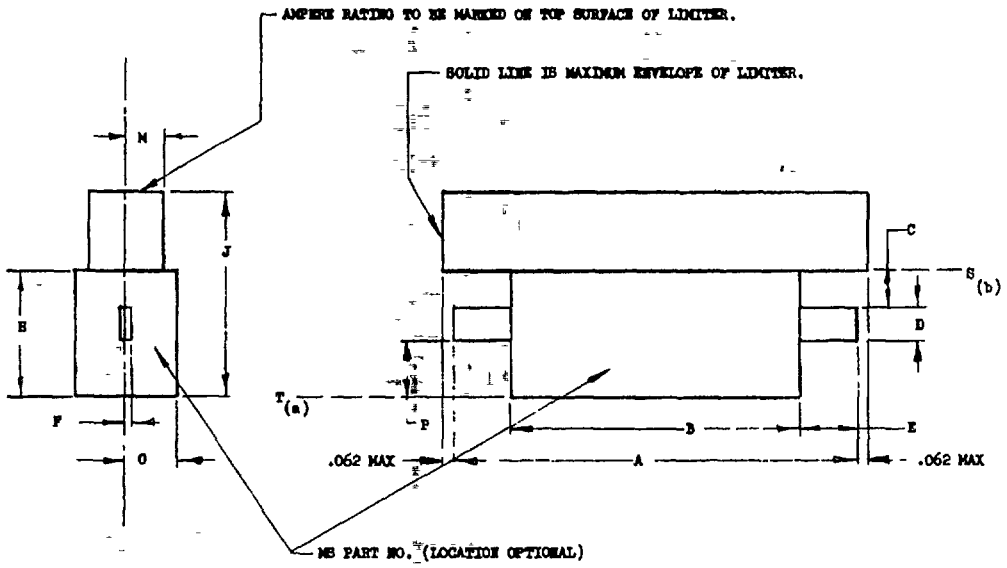

MS PART NO.	AMPERE RATING	WEIGHT LB MAX	A ±.031	B MAX	C MIN	D MIN	E MIN	F ±.003	G MAX	H MAX	J MAX	M MAX	P MIN	FUSEHOLDER (REF)
MS28938-01	1	.033	1.969	1.400	.100	.156	.280	.031	.250	.625	1.000	.195	.156	MS24000
MS28938-02	2													
MS28938-03	3													
MS28938-15	15													
MS28938-25	25													
MS28938-35	35	.047	2.219	1.500	.125	.219	.350	.047	.360	.682	1.140	.235	.200	MS24001

MATERIAL LIMITER BLADE; COPPER WITH SILVER PLATE
PLASTIC; SILICONE PER MIL-M-14 TYPE MSI-30 OR DIALLYL ISOPHTHALATE PER MIL-M-19833, TYPE GDI-30F
COLOR - RED PER MIL-STD-104 EITHER CLASS 1 OR 2.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES DECIMALS ±.015.
VOLTAGE RATING: 115/200 VOLTS AC, 400 CPS, 28 VOLTS DC.
CONFIGURATION OF BODY LIMITER OPTIONAL PROVIDED MAXIMUM DIMENSIONS ARE NOT EXCEEDED.
(a) WHEN T IS USED TO BOTTOM LIMITER IN FUSEHOLDER CLIP, DIMENSION P APPLIES.
(b) WHEN S IS USED TO BOTTOM LIMITER IN FUSEHOLDER CLIP, DIMENSION C APPLIES.
ALTERNATING CURRENT INTERRUPTING CAPACITY SHALL MEET THE REQUIREMENTS OF 3.5.6 OF MIL-F-5372 EXCEPT THAT THE INTERRUPTING PROSPECTIVE FAULT CURRENT SHALL BE 3500 AMPERES FOR A LINE TO NEUTRAL FAULT AND 2500 AMPERES FOR A LINE TO LINE FAULT.
DIRECT CURRENT INTERRUPTING CAPACITY SHALL MEET THE REQUIREMENTS OF 3.5.7 OF MIL-F-5372 EXCEPT THAT THE INTERRUPTING PROSPECTIVE FAULT CURRENT SHALL BE 3500 AMPERES.

INACTIVE FOR NEW DESIGN AFTER 6 FEBRUARY 1964 USE MS28937

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(B) STANDARD REDRAWN

APPROVED 6 Feb 64 REVISED (A) 7 May 65 (B) 28 Apr 67

Review activities Navy - AS USAF - 11 -85


This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

P A. Navy - AS Other Cust USAF - 11	TITLE FUSE, LIMITER TYPE, ENCLOSED LINK, INTERMEDIATE RATING, AIRCRAFT	MILITARY STANDARD MS28938(ASG)
PROCUREMENT SPECIFICATION MIL-F-5372	SUPERSEDES MS24124, MS24125, MS27121	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
ASG use only

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:01Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5920

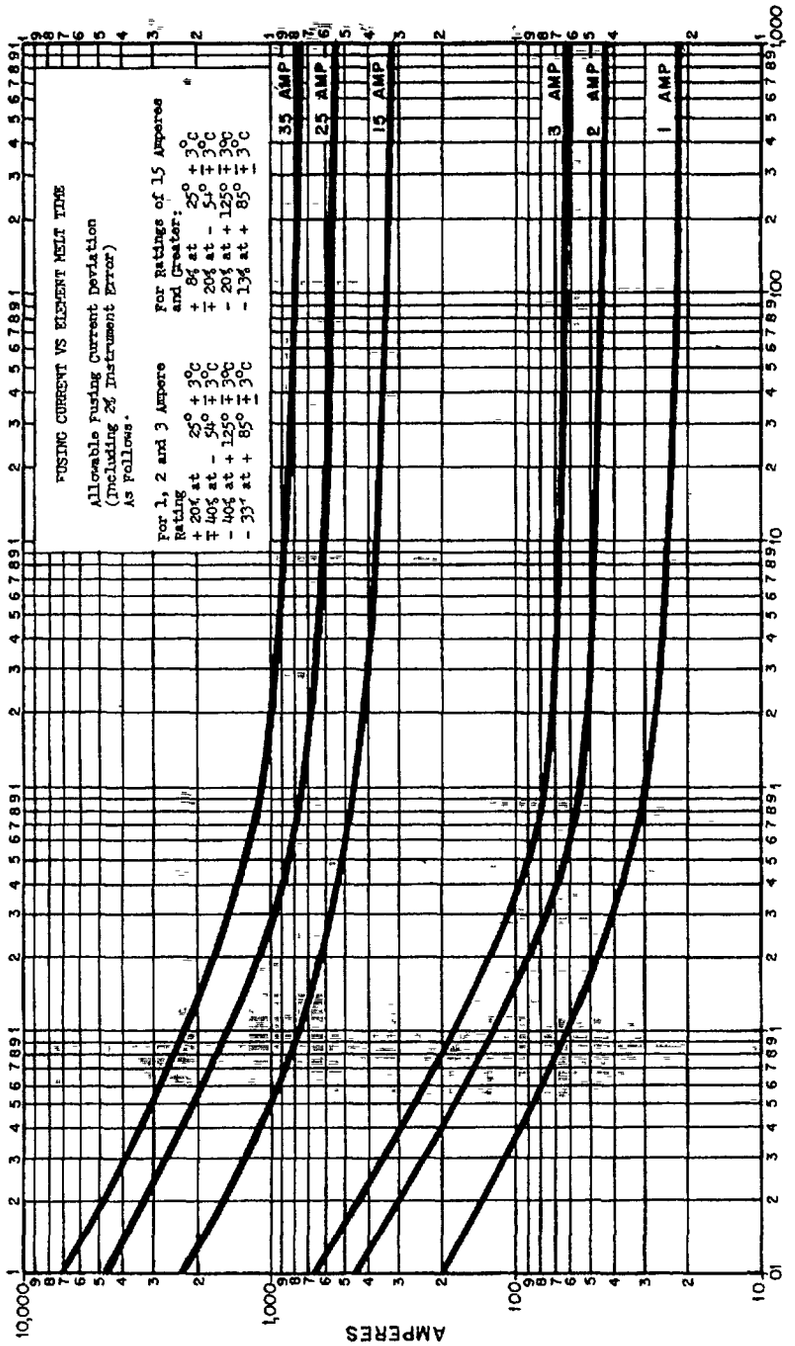

APPROVED 6 Feb 64 REVISED (B) FOR CHANGES SEE SHEETS 1 AND 2

(B) STANDARD REDRAWN

P.A. Navy - AS Other Cust USAF - 11	TITLE FUSE, LIMITER TYPE, ENCLOSED LINK, INTERMEDIATE RATING, AIRCRAFT	MILITARY STANDARD MS28938(ASG)
PROCUREMENT SPECIFICATION MIL-F-5372	SUPERSEDES MS24124, MS24125, MS27121	SHEET 2 OF

DD FORM 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

*U.S. GOVERNMENT PRINTING OFFICE: 1967 281-818/8041

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

Review activities: Navy - AS
USAF - 11 -85

User activities

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:01Z
Check the source to verify that this is the current version before use.