
FED. SUP CLASS
5935

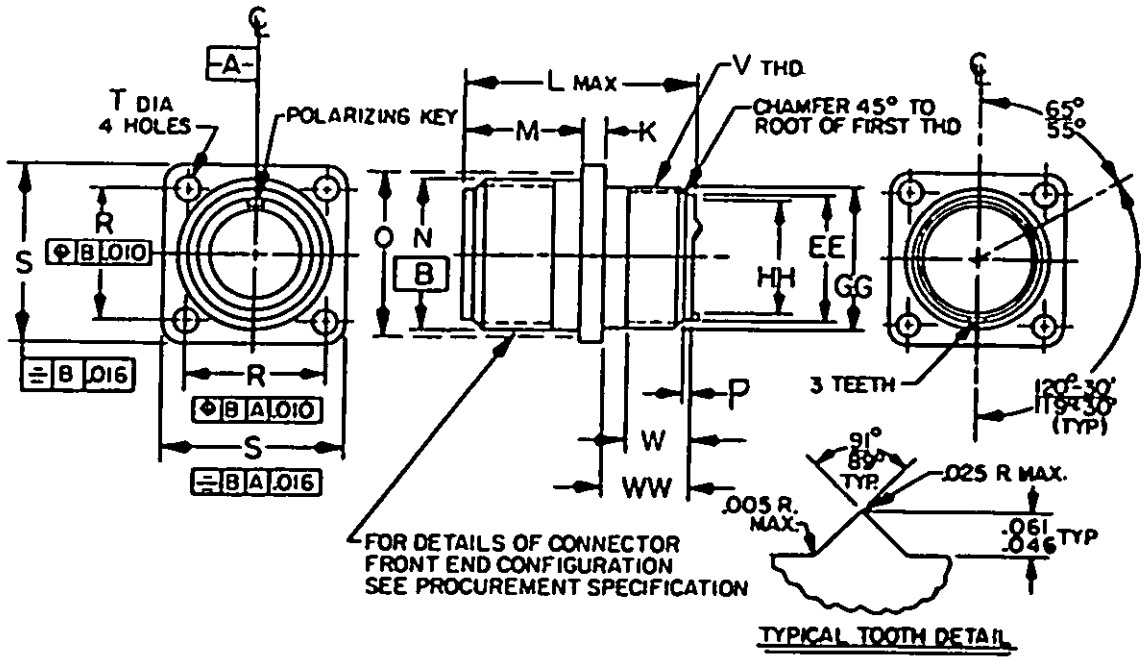

CLASSES D, L, U, W ENVIRONMENT RESISTANT INTERFACE ONLY - WITH ACCESSORY THREADS

Classes K and Y cancelled after 18 Feb 72.
Classes L, U, and W inactive for design after 23 Mar 76

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.016.
3. Dimensions and tolerancing in accordance with ANSI Y14.5-1973.
4. MIL-C-5015 crimp contact, front and rear release connectors and solder contact connectors are intermateable.
5. Unless otherwise shown, corresponding features of pin and socket contact connectors are identical.
(D) 6. For insert arrangements see MIL-STD-1651.
7. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
8. Referenced documents shall be of the issue in effect on date of invitations for bid.

(D) DENOTES CHANGES

P.A Navy - AS Other Cust		TITLE CONNECTORS, RECEPTACLE, ELECTRIC, WALL MOUNTING, FRONT RELEASE, CRIMP CONTACT, AN TYPE- WITH ACCESSORY THREADS	MILITARY STANDARD MS3412(NAVY)
Procurement Specification MIL-C-5015		SUPERSEDES:	PAGE 1 OF 3

DD FORM 1 MAY 73 672 (Limited coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5935-N035-8

APPROVED 18 Oct 71 REVISED (A) 18 Feb 72 (B) 31 Oct 72 (C) 17 DEC 75 (D) 23 MAR 76

User activities:

Review activities:

This military standard is approved for use by Naval Air Systems Command, NAVY AS , Department of the Navy , and is available for use by all Departments and Agencies of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:04Z
Check the source to verify that this is the current version before use.

Ⓓ

SIZE	K ±.015	L MAX SIZE 16 & 12 CONT'S	L MAX SIZE 8, 4 & 0 CONT'S	M +.031 -.000	N +.000 -.062	O (REF) MTG. HOLE	R T.P. C_L-C_L	S ±.031	T +.010 -.005
8S	.083	1.662		.562	.532	.562	.594	.875	.120
10S					.656	.688	.719	1.000	
10SL					.656	.688	.719	1.000	
12S				.562	.782	.812	.812	1.094	
12				.750	.782	.812	.812	1.094	
14S				.562	.906	.938	.906	1.188	
14				.750	.906	.938	.906	1.188	
16S				.562	1.032	1.062	.969	1.281	
16	.083		1.937	.750	1.032	1.062	.969	1.281	
18	.125				1.156	1.188	1.062	1.375	
20					1.282	1.312	1.156	1.500	
22				.750	1.406	1.438	1.250	1.625	.120
24				.812	1.532	1.562	1.375	1.750	.147
28				.812	1.782	1.812	1.562	2.000	.147
32				.875	2.032	2.062	1.750	2.250	.173
36					2.282	2.312	1.938	2.500	
40					2.532	2.562	2.188	2.750	
44					2.782	2.812	2.375	3.000	
48	.125	1.662	1.937	.875	3.032	3.062	2.625	3.250	.173

Ⓓ FOR CHANGES SEE PAGES 1 & 2

APPROVED 18 Oct 71 REVISED Ⓒ For change see page 1

User activities:
Review activities:
This military standard is approved for use by Naval Air Systems Command, NAVY AS , Department of the Navy , and is available for use by all Departments and Agencies of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:04Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

SIZE	V THREAD CLASS 2A	EE	GG MAX	HH ±.005	P ±.005	W MIN	WW MIN
8S	.500-20 UNEF	.426 .419	.499	.368	.065	.290	.310
10S	.625-24	.562 .555	.625	.502			
10SL	.625-24	.562 .555	.625	.502			
12S	.750-20	.679 .672	.750	.618			
12	.750-20	.679 .672	.750	.618			
14S	.875-20	.804 .797	.875	.743			
14	.875-20	.804 .797	.875	.743			
16S	1.000-20	.929 .922	1.000	.868			
16	1.000-20	.929 .922	1.000	.868			
18	1.062-18	.984 .977	1.062	.924			
20	1.188-18	1.109 1.102	1.187	1.049			
22	1.312-18	1.234 1.227	1.312	1.174			
24	1.438-18 UNEF	1.359 1.352	1.437	1.299	.065	.290	.310
28	1.750-18 UNS	1.613 1.603	1.750	1.520	.095	.467	.487
32	2.000-16 UNS	1.863 1.853	2.000	1.770			
36	2.250-16 UN	2.113 2.103	2.250	1.985			
40	2.500-16 UN	2.363 2.353	2.500	2.200			
44	2.750-16 UN	2.613 2.603	2.750	2.455			
48	3.000-16 UN	2.858 2.848	3.000	2.705	.095	.467	.487

Example of part no: MS3412D 18-1PW

MS3412 D — 18 - 1 P W

- MS3412 — Basic part no.
- D — Class D, L, U, W
- Material designator: S-stainless steel. Leave blank for aluminum alloy.
- 18 — Shell size
- 1 — Insert arrangement
- P — Contact designator
- W — Alternate insert position W, X, Y, or Z. Leave blank for normal position.

APPROVED 18 Oct 71 REVISED © For change see page 1 (D) FOR CHANGES SEE PAGES 1 & 2

P.A Navy - AS
Other Cust

Procurement Specification
MIL-C-5015

TITLE CONNECTORS, RECEPTACLE, ELECTRIC, WALL MOUNTING, FRONT RELEASE, CRIMP CONTACT, AN TYPE-WITH ACCESSORY THREADS

SUPERSEDES

MILITARY STANDARD
MS3412(NAVY)

DD FORM 1 MAY 68 672 (limited coordination)

This military standard is approved for use by Naval Air Systems Command, NAVY AS , Department of the Navy , and is available for use by all Departments and Agencies of the Department of Defense.

Review activities:

User activities:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:04Z
Check the source to verify that this is the current version before use.